

SORELL COUNCIL NOTICE OF PROPOSED DEVELOPMENT

Notice is hereby given that an application has been made for planning approval for the following development:

SITE: 46 Friendship Drive, Sorell

PROPOSED DEVELOPMENT:


DWELLING

The relevant plans and documents can be inspected at the Council Offices at 47 Cole Street, Sorell during normal office hours, or the plans may be viewed on Council's website at www.sorell.tas.gov.au until Tuesday 7th May 2024. Any person may make representation in relation to the proposal/s by letter or electronic mail (sorell.council@sorell.tas.gov.au) addressed to the General Manager. Representations must be received no later than Tuesday 7th May 2024.

APPLICANT: Sjm Property Developments

DATE: 18 April 2024

APPLICATION NO: 5.2024.60.1

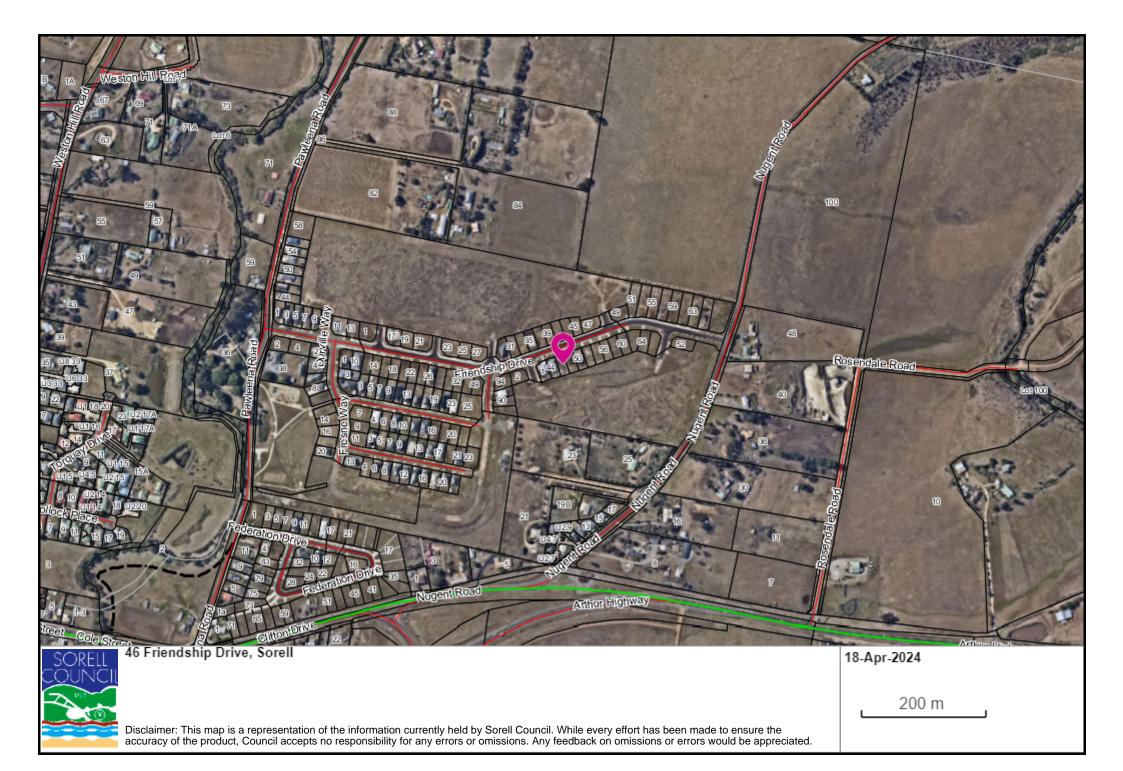

Part B: Please note that Part B of this form is publicly exhibited.

Full description of Proposal:	Use: Residential							
оттторозан.	Development: Dwelling	Development: Dwelling						
	Large or complex proposals s	e or complex proposals should be described in a letter or planning report.						
Design and cons	struction cost of proposal:	\$ 500,00	00 Estimate					
Is all, or some th	ne work already constructed:	: No: ☑	Yes:					
Location of proposed works:	Street address: 46 Friends Suburb: Sorell Certificate of Title(s) Volume	Posto	code: 7172 Folio: 313					
Current Use of Site	Vacant							
Current Owner/s:	Name(s)THOMAS FAMILY PROPERTY SERVICES PTY LTD ACN 672 59							
Is the Property of Register?	on the Tasmanian Heritage	No: ☑ Yes: □	If yes, please provide written advice from Heritage Tasmania					
Is the proposal than one stage?	to be carried out in more	No: ☑ Yes: ☐	If yes, please clearly describe in plans					
Have any potentially contaminating uses been undertaken on the site?		No: ☑ Yes: ☐	If yes, please complete the Additional Information for Non-Residential Use					
Is any vegetation proposed to be removed?		No: ☑ Yes: □	If yes, please ensure plans clearly show area to be impacted					
Does the proposal involve land administered or owned by either the Crown or Council?		No: ☑ Yes: ☐	If yes, please complete the Council or Crown land section on page 3					
	ded vehicular crossing is requi							
10 Table 10	chicular Crossing (and Associa rell.tas.gov.au/services/engir	27	auon IVIIII					
			Sorell Council Development Application: Development Application - 46 Friendship Drive, Sorell - P1.pdf					

For further information please contact Council on (03) 6269 0000 or email sorell.tas.gov.au Web: www.sorell.tas.gov.au

Part B continued: Please note that Part B of this form is publicly exhibited

Declarations and acknowledgements

- I/we confirm that the application does not contradict any easement, covenant or restriction specified in the Certificate of Title, Schedule of Easements or Part 5 Agreement for the land.
- I/we consent to Council employees or consultants entering the site and have arranged permission and/or access for Council's representatives to enter the land at any time during normal business hours.
- I/we authorise the provision of a copy of any documents relating to this application to any person for the purposes of assessment or public consultation and have permission of the copyright owner for such copies.
- I/we declare that, in accordance with s52(1) of the Land Use Planning and Approvals Act 1993, that I have notified the owner(s) of the intention to make this application.
- I/we declare that the information in this application is true and correct.

Details of how the Council manages personal information and how you can request access or corrections to it is outlined in Council's Privacy Policy available on the Council website.

- I/we acknowledge that the documentation submitted in support of my application will become a public record held by Council and may be reproduced by Council in both electronic and hard copy format in order to facilitate the assessment process, for display purposes during public exhibition, and to fulfil its statutory obligations. I further acknowledge that following determination of my application, Council will store documentation relating to my application in electronic format only.
- Where the General Manager's consent is also required under s.14 of the *Urban Drainage Act 2013*, by making this application I/we also apply for that consent.

Applicant Signature:	Signature: Amda Puga Date: 27/3/2024
	Signature:////////

Crown or General Manager Land Owner Consent

If the land that is the subject of this application is owned or administered by either the Crown or Sorell Council, the consent of the relevant Minister or the Council General Manager whichever is applicable, must be included here. This consent should be completed and signed by either the General Manager, the Minister, or a delegate (as specified in s52 (1D-1G) of the Land Use Planning and Approvals Act 1993).

Please note:

- If General Manager consent if required, please first complete the General Manager consent application form available on our website www.sorell.tas.gov.au
- If the application involves Crown land you will also need a letter of consent.
- Any consent is for the purposes of making this application only and is not consent to undertaken work or take any other action with respect to the proposed use or development.

1		being responsible for the
administration of land atdeclare that I have given permis	ssion for the making of this application for	Sorell Council Development Application: Development Application - 46 Friendship Drive, Sorell - P1.pdf
		Plans Reference:P1 Date Received:27/03/2024
Signature of General Manager, Minister or Delegate:	Signature	Date:

BUSHFIRE HAZARD REPORT



Proposed residential dwelling 46 Friendship Drive Sorell, 7172

Dated 5th February 2024 Report by David Lyne BFP-144



11 Granville Avenue Geilston Bay, 7015 M: 0421 852 987 dave_lyne@hotmail.com

Contents

1.	Introduction		2
2.	Limit	tation of Report	3
3.	Site I	Description and Background	3
	3.1	Property Details	3
	3.2	Classification of Vegetation	4
	3.3	Slope	5
4. Bu	ıshfire A	ssessment	5
	4.1 B	ushfire Attack Level	5
	4.2 R	Road / Vehicle Access	7
	4.3 W	Vater Supply	7
5. Cc	nclusion	1	7
6. Re	eference	ς	8

Appendix A – Topographic Map with Cadastral & Contour Overlay - indicates subject site
Appendix B – Site photos and designers site plan
Appendix C – Bushfire Hazard Management Plan, by David Lyne – certified date 05.02.2024; &
Certificate of Others (Form 55) 1467/24



1. Introduction

I have been engaged by SJM Property Developments to prepare a bushfire report and plan for a new residential dwelling in the suburb of Sorell. The intent of this report is to confirm the suitability of the bushfire prone parcel of land to be successfully developed for the dwelling in accordance with the Directors Determination – bushfire hazard areas v1.1 (the Code).

The assessment describes the site and surrounding area, classifying the vegetation, assessing the slope and environmental features. This report should be included with approval documentation forming part of the certified documentation intended to satisfy the Directors Determination. The body of the report describes the site and assesses the requirements to be implemented to satisfy the requirements of the Directors Determination.

2. Limitation of Report

This report has been prepared for the above mentioned clients for their use and distribution only. The intent of the report is to provide supporting documentation for the Development Application (specifically vegetation clearance/maintenance distances) and the Building Application. Should submitted Application Plans differ from the Certified Plans in this report then an amended design review should be conducted to determine the suitability of any amendments in relation to the Bushfire Prone Area Requirements of AS3959-2018.

It is also to be noted that the assessment has been conducted according to the site inspection being conducted in February 2024 and does not take into account the possibility of altered site conditions either naturally occurring or where currently maintained or excluded vegetation conditions change due to a lack of ongoing maintenance.

It should be noted that compliance with the recommendations contained in this assessment does not mean that there is no residual risk to life safety or property as a result of bushfire. A residual level of risk remains which recognizes that removing the risk to life and property in absolute terms is not achievable while people continue to build in bushfire prone areas. This limitation is expressed in the following extract from AS 3959 (2018) which states (in the forward), It should be borne in mind that the measures contained in this Standard cannot guarantee that a building will survive a bushfire event on every occasion. This is substantially due to the degree of vegetation management, the unpredictable nature and behaviour of fire, and extreme weather conditions.

This level of residual risk is inherent in all bushfire standards and also applies to this assessment.

3. Site Description and Background

46 Friendship Drive Sorell is an existing land parcel located in the municipality of the Sorell Council. The property is currently low threat vegetation, with neighbouring properties currently low threat vegetation to all directions.

The site has access to a pre-approved public road – Friendship Drive, which links to Nugent Road and eventually the Arthur Highway. This allotment is provided with a reticulated hydrant water supply for firefighting.

3.1 Property Details

Address: 46 Friendship Drive, Sorell 7172

Municipality: Sorell Council

Zoned: General Residential

Lot Number: 184600/313

Type of Development: New Residential dwelling

Classified BAL: BAL-LOW



Development Application: Development Application - 46 Friendship Drive, Sorell - P1.pdf



Appendix A: Photo 1 – Aerial photo with Cadastral Overlay – Subject site highlighted blue.

3.2 Classification of Vegetation

The vegetation affecting the site has been classified in accordance with Clause 2.2.3 of AS 3959-2018. The Bushfire-Prone vegetation affecting the site is predominantly *Grassland – Group G* in accordance with AS3959-2018.

In this case, in accordance with Clause 2.2.2 of AS 3959-2018, the relevant Fire Danger Index for Tasmania of 50 (FDI 50).

When considering the definition of Bushfire Prone Area under the Directors Determination it is evident the proposed dwelling location is within 100 metres of greater than 1 hectare of vegetation classified in accordance with AS 3959-2018 and is therefore considered 'Bushfire Prone'.

From the proposed dwelling site a 360° survey has been conducted to determine the vegetation type, proximity and slope under the vegetation which is of the highest hazard rating. In this case the **Grassland – Group G** is the highest hazard vegetation surrounding the proposed dwelling.

Note: in a bushfire there is a possibility of fire attack from any direction, not just the direction of the highest hazard.

Photo 1 above indicates the Bushfire Prone Vegetation described. Refer to Appendix B for current conditions as at time of inspection.



Development Application: Development Application - 46 Friendship Drive, Sorell - P1.pdf

3.3 Slope

The Effective slope of the land under the classified vegetation is determined in accordance with Clause 2.2.5 of AS 3959- 2018.

The *effective* slope under the bushfire prone vegetation is generally Upslope/Flatland to the south, and east; downslope o-5° to the north and to the west.

Refer to Appendix A Image for topographic contour information.

4. Bushfire Assessment

In accordance with Clause 2.2 of AS 3959-2018, the Simplified Procedure has been applied to determine the Bushfire Attack Level (BAL) for the proposed dwelling site. In accordance with the Directors Determination, fire-fighting water supply and vehicle access are also considered and discussed in relation to the proposed dwelling.

4.1 Bushfire Attack Level

Considering the current conditions, in accordance with AS3959-2018 the dwelling site is capable of achieving **BAL-LOW** (the minimum required standard being BAL-29 required by the Directors Determination).

The desired BAL rating to be applied in this instance will be **BAL-LOW**. The vegetation within the Hazard Management Area (HMA) is to be continually managed to a low threat level - as per Clause 2.2.3.2 of AS3959-2018.



Property Details

Applicants Na	me	SJM Property Developments		Phone		0407 542 974	
Municipality		Sorell Council		Zoning	General Residential		
Certificate of Title/Lot No.		184600/313	Lot 9	Size	499n	1 ²	
Address	46 Frie	ndship l	Drive, Sorell 7172				

Type of Building Work

New Class 1a Buildings	х	SORELL COLNICII
New Class 10a Building	Ц	Sorell Council
New Class 2 Building		Development Application: Development Application - 46 Friendship Drive, Sorell - P1.pdf
New Class 3 Building		Plans Reference:P1 Date Received:27/03/2024
Alteration/Additions to an existing building		
Description of building work: e.g. single dwelling with attache New residential dwelling	d garage	
D LE' Av. LL LONIX		

Bush Fire Attack Level (BAL)

Relevant fire danger index: (see clause 2.2.2) <u>FDI 50</u>

Assess the vegetation within 100m in all directions (tick relevant group)

Note 1: Refer to table 2.3 and figures 2.3 & 2.4 for description and classification of vegetation. Note 2: If there is no classified vegetation within 100m of the site then the BAL is LOW for that part of the site.

Vegetation Classification (See	North	X	South	X	East	X	West	X
Table 2.3	North East		South-West		South-East		North-West	
Group -	Low threat	t veg.	Low threat	veg.	Low threat	veg.	Low threat	veg.

	Circle relevant para	graph descriptor fro	m clause 2.2.3.2	
(where applicable)	(a) (b) (c) (d) <mark>(e) (f)</mark>			

Distance of the site from classified vegetation (see clause 2.2.4)

Distance to					
classified	N/A	N/A	N/A	N/A	
vegetation			·		

Effective Slope	Upslope				
	Upslope/o°	Upslope/o° X	Upslope/o°	Upslope/o° X	
		Dow	nslope		
Slope under the	>0 to 5° X	>o to 5° □	>0 to 5° X	>o to 5° □	
classified vegetation	>5 to 10° 🔲	>5 to 10° 🔲	>5 to 10° 🗆	>5 to 10° 🗆	
	>10 to 15° 🗆				
	>15 to 20° 🗆				

BAL value for each side of the site	BAL-LOW	BAL-LOW	BAL-LOW	BAL-LOW
Separation to achieve BAL-29	N/A	N/A	N/A	N/A
Separation to achieve BAL-19	N/A	N/A	N/A	N/A
Separation to achieve BAL-12.5	N/A	N/A	N/A	N/A

Construction Requirements

For this particular development a BAL-LOW rating would suit all directions of this site, construction will be generally compliant with AS3959 -2018 Sections 3 and 4.

4.2 Road / Vehicle Access

The primary access to the lot is from a sealed public road – Friendship Drive, which connects to Nugent Road and eventually the Arthur Highway. As there is a hydrant within 120m of the proposed dwelling, there are no requirements to upgrade the driveway and access for firefighting purposes.

4.3 Water supply for firefighting

The proposed development has access to a reticulated water supply suitable for firefighting. There is an existing water hydrant located to the north-west of the front boundary of the property.

5. Conclusion

The site has been classified as **BAL-LOW** as per the assessment processes outlined in AS₃₉₅₉₋₂₀₁₈. The separation distances shown above are the areas to be maintained and kept in a way to reduce the fuel loads present in order to achieve lower BAL ratings. For this particular site and for where the proposed building is to be constructed, a **BAL-LOW** rating is easily achieved and would suit all directions of the site.

6. References

- Directors Determination Bushfire hazard areas v1.1
- LIST map version. Aerial Photograph [online]. Available from: http://www.thelist.tas.gov.au/listmap/listmap



- Standards Australia 2018, Construction of buildings in bushfire prone areas, AS 3959-2018.

Statement


I have taken all reasonable steps to ensure that the information provided in this assessment is accurate and reflects the conditions on and around the site and allotment on the date of this assessment.

It should be noted that this report does not take into account the possibility of altered site conditions either naturally occurring or where currently maintained or excluded vegetation conditions change due to lack of ongoing maintenance. Compliance with the recommendations contained in this assessment does not mean that there is no residual risk to safety of life or property as a result of bushfire.

Signed:

Date: 05/02/2024.....

Appendix B - Site photos and designers site plan

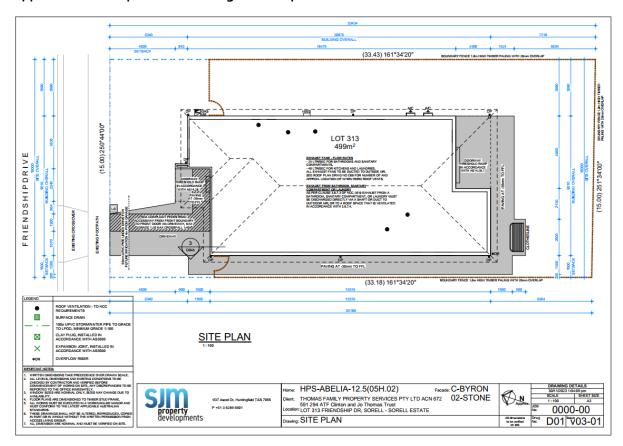





Looking North



Looking South





Looking East



Looking West



HAZARD MANAGEMENT AREAS - HMA

Hazard Management Area includes the area to protect the Building as well as the access and water supplies. The entirety of this allotment should be treated as HMA.

Vegetation in the Hazard Management area is to be managed and maintained in a minimum fuel condition.

The HMA is determined from the unmanaged vegetation on neighbouring allotments, and should the level of the unmanaged vegetation increase the BHMP and HMA should be reviewed to determine the ongoing suitability of the BHMP and HMA associated with the development.

- MAINTENANCE SCHEDULE
 Removal of fallen limbs, leaf and bark litter;
- Cut lawns short (less than 100mm) and maintain:
- Remove pine bark and other garden mulch;
- Complete under-brushing and thin out the under storey;
- Prune low hanging trees to ensure separation from ground litter;
- Prune larger trees to establish and maintain horizontal and vertical canopy separation;
- Maintain storage of petroleum fuels; Remove fallen limbs, leaf and bark litter from roofs, gutters and around the building;


BUSHFIRE PROTECTION MEASURES

To reduce the risk of bushfire attack, continual maintenance of bushfire protection measures including building maintenance, managed vegetation areas, water supply and road construction are to be undertaken by successive owners for perpetuity.

WATER SUPPLY

There is an existing fire hydrant within 120m of the most disadvantaged section of the dwelling.

Low-Threat Vegetation Exclusion 2.2.3

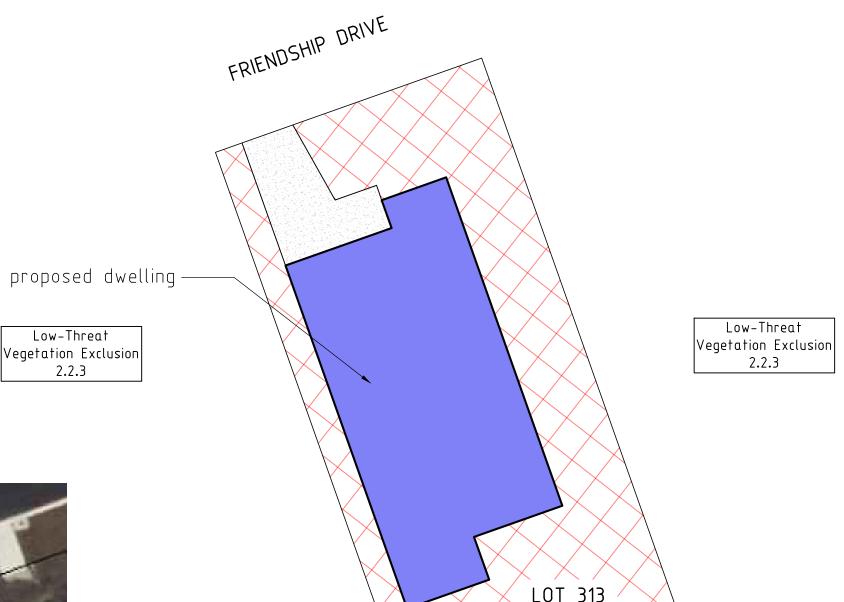



Development Application: Development Application - 46 Friendship Drive, Sorell - P1.pdf

Plans Reference:P1 Date Received:27/03/2024

Low-Threat Vegetation Exclusion 2.2.3


499m²

SCALE 1:200 SCALE 1:200

PLAN TO BE READ IN CONJUNCTION WITH BUSHFIRE ATTACK LEVEL (BAL) REPORT

NOTIFY COUNCIL AND CERTIFYING BUSHFIRE PRACTITIONER IF ANY VARIATION IN BUILDING SETOUT OR VEGETATION HAZARDS OCCUR

ENSURE THIS PLAN AND ACCOMPANYING REPORT DO NOT CONFLICT WITH OTHER RELEVANT REPORTS AND ASSESSMENTS



Prepared By David Lyne - BFP 144

SJM Property Developments 46 Friendship Drive, Sorell Tasmania 7172 Job No: 1467



11 GRANVILLE AVENUE GEILSTON BAY, TASMANIA 7015 PH: 0421 852 987 EMAIL: dave_lyne@hotmail.com Accredited Designer: David Lyne CC7063

PLEASE READ CAREFULLY

THIS PLAN CERTIFIED CORRECT IS THE ONE REFERRED TO IN THE BUILDING CONTRACT AND I UNDERSTAND CHANGES HEREAFTER MAY NOT BE POSSIBLE.

<u>Final Plan:</u> any requested variations to your house Plan will incur an amendment / administration minimum fee

SIGNATURES						
CLIENT:	DATE:					
CLIENT:	DATE:	•••••				
BUILDER:	.D.ATE:					
DWG NO: 14	SHEET: 0	1				
SCALE AT A	DATE: 05.	02.2024				
DRAWN:DL	REV	0				

SITE PLAN NTS

CERTIFICATE OF QUALIFIED PERSON – ASSESSABLE ITEM

Section 321

details:		Address Form 55
details:		
details:		
David Lyne		
1 Granville Avenue		Phone No: 0421 852 987
Geilston Bay TAS 70°	15	Fax No:
BFP-144 Email address:	dav	ve_lyne@hotmail.com
accredited to report on bushfire hazards nder Part IVA of the Fire Service Act 979	Directo	iption from Column 3 of the or's Determination - Certificates alified Persons for Assessable
nalysis of hazards in bushfire-prone reas	Directo	iption from Column 4 of the or's Determination - Certificates alified Persons for Assessable
6 Friendship Drive		Lot No: 313
Sorell 7	172	Certificate of title No: 184600
ssessment – BAL Ratings		(description of the assessable item being certified) Assessable item includes – - a material; - a design - a form of construction - a document - testing of a component, building system or plumbing system - an inspection, or assessment, performed
S:		
shfire Hazard Management Plan	Schedule Determin Qualified	ion from Column 1 of e 1 of the Director's nation - Certificates by I Persons for Assessable
3 r c	FP-144 Email address ccredited to report on bushfire hazards nder Part IVA of the Fire Service Act 279 Enalysis of hazards in bushfire-prone reas 6 Friendship Drive orell 7 ssessment – BAL Ratings : shfire Hazard shfire Hazard shfire Hazard Management Plan	Email address: day ccredited to report on bushfire hazards nder Part IVA of the Fire Service Act 279 Inalysis of hazards in bushfire-prone reas Gescriptive Orell Sesessment – BAL Ratings Inalysis of hazard (descriptive) Inalysis of hazards in bushfire-prone Inalysis of hazards in bushfire-pr

• building work, plumbing work or plumbing installation of Sorell Council

OR

Development Application: Development Application - 46 Friendship Drive, Sorell - P1.pdf

a building, temporary structure or plumbing installation

In issuing this certificate the following matters are relevant

Documents: Bushfire Hazard Report – New residential dwelling

Bushfire Hazard Management Plan

Relevant • In Accordance with AS3959-2018; and

dance with AS3959-2018; and Sorell Council

• the Building Regulations (TAS).

Development Application: Development Application - 46 Friendship Drive, Sorell - P1.pdf

Plans Reference:P1 Date Received:27/03/2024

References: • AS3959-2018;

calculations:

• the Building Regulations (TAS); and

• Building Code of Australia (BCA).

Substance of Certificate: (what it is that is being certified)

The above mentioned report concludes that a BAL-LOW rating is achievable and easily maintained for the dwelling on this site

Scope and/or Limitations

The assessment has been conducted according to information provided by the designer/client and freely available historical data and does not take into account the possibility of altered site conditions from the data relied upon.

It should be noted compliance with the recommendations contained in the certified documents does not mean that there is no residual risk to life safety and property as a result of bushfire. The limitation is expressed in the following extract from AS3959-2018, which states:

It should be borne in mind that the measures contained in this Standard cannot guarantee that a building will survive a bushfire event on every occasion. This is substantially due to the degree of vegetation management, the unpredictable nature and behaviour of fire, and extreme weather conditions.

The level of residual risk is inherent in all bushfire standards and also applies to this certification.

The assessment has been undertaken and certification provided on the understanding that; -

- 1. The certificate only deals with the potential bushfire risk all other statutory assessments are outside the scope of this report.
- 2. The report only identifies the size, volume and status of vegetation at the time the site inspection was undertaken and cannot be relied upon for any future development. Impacts of future development and vegetation growth have not been considered.

I certify the matters described in this certificate.

Qualified person:

Signed:

Certificate No:

Date:

05/02/2024

AS2870:2011 SITE ASSESSMENT

46 Friendship Drive Sorell February 2024







GEO-ENVIRONMENTAL

SOLUTIONS



Development Application: Development Application - 46 Friendship Drive, Sorell - P1.pdf

Plans Reference:P1 Date Received:27/03/2024

Disclaimer: The author does not warrant the information contained in this document is free from errors or omissions. The author shall not in any way be liable for any loss, damage or injury suffered by the User consequent upon, or incidental to, the existence of errors in the information.



Investigation Details

Client: SJM Property Developments (Aus) Pty Ltd

Site Address: 46 Friendship Drive, Sorell

Date of Inspection: 16/02/2024

Proposed Works: New house

Investigation Method: Geoprobe 540UD - Direct Push

Inspected by: M. Campbell

Site Details

Certificate of Title (CT): 184600/313

Title Area: Approx. 506.4 m²

Applicable Planning Overlays: Bushfire-prone Areas, Airport obstacle limitation area

Slope & Aspect: 3° W facing slope

Vegetation: Grass & Weeds Disturbed

Background Information

Geology Map: MRT

Geological Unit: Tertiary Basalt

Climate: Annual rainfall 400mm

Water Connection: Mains

Sewer Connection: Serviced-Mains

Testing and Classification: AS2870:2011, AS1726:2017 & AS4055:2021



Development Application: Development Application - 46 Friendship Drive, Sorell - P1.pdf





Investigation

A number of bore holes were completed to identify the distribution and variation of the soil materials at the site, bore hole locations are indicated on the site plan. See soil profile conditions presented below. Tests were conducted across the site to obtain bearing capacities of the material at the time of this investigation.

Soil Profile Summary

BH 1 Depth (m)	BH 2 Depth (m)	USCS	Description	
0.00-0.10	0.00-0.10	ML	Clayey SILT: trace of gravels, dark brown, slightly moist, medium dense,	
0.10-1.10	0.10-0.50	СН	Silty CLAY : trace of gravels, high plasticity, dark grey, brown, slightly moist, stiff,	
1.10-1.20	0.50-0.60	GC	Clayey GRAVEL: yellow, dry very dense, refusal.	

Site Notes

Soils on the site are developing from Tertiary basalt, the clay fraction is likely to show moderate ground surface movement with moisture fluctuations.

Site Classification

The site has been assessed and classified in accordance with AS2870:2011 "Residential Slabs and Footings".

The site has been classified as:

Class M

Y's range: **20-40mm**

Notes: that is a moderately reactive site.



evelopment Application: Development Application - 46 Friendship Drive, Sorell - P1.pdf



Wind Loading Classification

According to "AS4055:2021 - Wind Loads for Housing" the house site is classified below:

Wind Classification:	N2
Region:	Α
Terrain Category:	2.5
Shielding Classification:	PS
Topographic Classification:	T1
Wind Classification:	N2
Design Wind Gust Speed – m/s $(V_{h,u})$:	40

Construction Notes & Recommendations

The site has been classified as **Class M** - Moderately reactive clay or silt site, which may experience moderate ground movement from moisture changes. Some variation of subsoil depth and weathering of underlying parent material was encountered across the site.

The clay material present was highly reactive, it is shallow and is not likely to exhibit maximum surface movement potential. It is strongly recommended the foundations be placed on the underlying bedrock to minimise the potential for significant foundation movement.

All earthworks on site must comply with AS3798:2012, and I further recommend that consideration be given to drainage and sediment control on site during and after construction. Care should also be taken to ensure there is adequate drainage in the construction area to avoid the potential for weak bearing and foundation settlement associated with excessive soil moisture.

I also recommend that during construction that I and/or the design engineer be notified of any major variation to the foundation conditions as predicted in this report.

Dr John Paul Cumming B.Agr.Sc (hons) PhD CPSS GAICD Director





Explanatory Notes

1 Scope of Works

The methods of description and classification of soils used in this report are based largely on Australian Standard 1726 – Geotechnical Site Investigations (AS1726:2017), with reference to Australian Standard 1289 – Methods for testing soils for engineering purposes (AS1289), for eventual Site Classification according to Australian Standard 2870 (AS2870:2011) – Residential Slabs and Footings and Australian Standard 1547 (AS1547:2012) On-site domestic wastewater management.

1.1 Site Classification AS2870:2011

Site classification with reference to the above Australian Standards are based on site reactivity.

Class	Foundation Conditions	Characteristic Surface Movement
Α	Most sand and rock sites with little or no ground movement from moisture changes.	0mm
S	Slightly reactive clay sites, which may experience only slight ground movement from moisture changes.	0 – 20mm
М	Moderately reactive clay or silt sites, which may experience moderate ground movement from moisture changes.	20 – 40mm
H-1	Highly reactive clay sites, which may experience high ground movement from moisture changes.	40 – 60mm
H-2	Highly reactive clay sites, which may experience very high ground movement from moisture changes.	60 – 75mm
E	Extremely reactive sites, which may experience extreme ground movement from moisture changes.	>75mm

Note: Soils where foundation performance may be significantly affected by factors other than reactive soil movement are classified as **Class P**.

A site is classified as Class P when:

- The bearing capacity of the soil profile in the foundation zone is generally less than 100kpa
- If excessive foundation settlement may occur due to loading on the foundation.
- The site contains uncontrolled fill greater than 0.8m in depth for sandy sites and 0.4m in depth for other soil materials.
- The site is subject to mine subsistence, landslip, collapse activity or coastal erosion.
- The site is underlain by highly dispersive soils with significant potential for erosion
- If the site is subject to abnormal moisture conditions which can affect foundation performance





1.2 Soil Characterisation

This information explains the terms of phrase used within the soil description area of the report.

It includes terminology for cohesive and non-cohesive soils and includes information on how the Unified Soil Classification Scheme (USCS) codes are determined.

NON COHESIVE – SAND & GRAVEL				
Consistency Description	Field Test	Dynamic Cone Penetrometer blows/100 mm		
Very loose (VL)	Easily penetrated with 13 mm reinforcing rod pushed by hand.	0 - 1		
Loose (L)	Easily penetrated with 13 mm reinforcing rod pushed by hand. Can be excavated with a spade; 50 mm wooden peg can be easily driven.	1 - 3		
Medium dense (MD)	Penetrated 300 mm with 13 mm reinforcing rod driven with 2 kg hammer, - hard shovelling.	3 - 8		
Dense (D)	Penetrated 300 mm with 13 mm reinforcing rod driven with 2 kg hammer, requires pick for excavation: 50 mm wooden peg hard to drive.	8 - 15		
Very dense (VD)	Penetrated only 25 - 50 mm with 13 mm reinforcing rod driven with 2 kg hammer.	>15		

COHESIVE - SILT & CLAY					
Consistency Description	Field Test	Indicative undrained shear strength kPa			
Very soft	Easily penetrated >40 mm by thumb. Exudes between thumb and fingers when squeezed in hand.	<12			
Soft	Easily penetrated 10 mm by thumb. Moulded by light finger pressure	>12 and <25			
Firm	Impression by thumb with moderate effort. Moulded by strong finger pressure	>25 and <50			
Stiff	Slight impression by thumb cannot be moulded with finger.	>50 and <100			
Very Stiff	Very tough. Readily indented by thumbnail.	>100 and <200			
Hard	Brittle. Indented with difficulty by thumbnail.	>200			



Development Application: Development Application - 46 Friendship Drive, Sorell - P1.pdf







1.3 USCS Material Descriptions

Soils for engineering purposes are the unconsolidated materials above bedrock, they can be residual, alluvial, colluvial or aeolian in origin.

Major Divisions Particle size mm Symbol USCS Group Typic Symbol			Typical Names			Labo	ratory Cla	essification		
2	BOULDERS	200			%<(0.075 mm (2)	Plasticity of fine fraction	$C_{ii} = \frac{D_{iii}}{D_{i0}}$	$C_i = \frac{(D_{io})^2}{(D_{io})(D_{io})}$	NOTES
£	COBBLES									
nt.S is larger than 0.075 mm)		63	GW	Well graded gravels and gravel-sand mixtures, little or no fines		0-5	-	>4	Between 1 and 3	(1) Identify fines by the method give
	GRAVELS (more than	coarse 20	GP	Poorly graded gravels and gravel-sand mixtures, little or no fines, uniform gravels	Divisions	0-5	2 18 8		comply with	for fine-grained soils.
NED SO	half of coarse	medium	GM	Silty gravels, gravel-sand-silt mixtures (1)	in 'Major I	12-50	Below 'A' line or PI<4	9 23		
COARSE GRAINED SOILS derial less than 63 mm is la	fraction is larger than 2.36 mm)	6 fine 2.36	GC	Clayey gravels, gravel-sand- clay mixtures (1)	gven	12-50	Above 'A' line and PI>7	233		(2) Borderline
COARSE GRAII of material less than	SANDS (more than half of coarse fraction is smaller than 2.36 mm)		SW	Well graded sands and gravelly sands, little or no fines	fractions according to the criteria	0-5	S=3	>6	Between 1 and 3	classifications occur when the percentage of fines (fraction
more than half of		0.6	SP	Poorly graded sands and gravelly sands, little or no fines	ording to	0-5	12 1 - 1 24		comply with bove	smaller than 0.075 mm size) is greater than 5% and less
		0.2	SM	Silty sands, sand silt mixtures (1)	MR acc	12-50	Below 'A' line or PI<4	=		than 12%. Borderline
-		fine 0.075	SC	Clayey sands, sand-clay mixtures (1)	8	12-50	Above 'A' line and PI>7	-	1	classifications require the us of SP-SM, GW GC.
flan 0.075 mm			ML	Inorganic silts, very fine sands, rock flour, silty or clayey fine sands or clayey silts with slight plasticity	dassification	0		dassificati	ticity Chai on of fine gra n of coarse gr	ined soils
smaller	SILTS & CLA (Liquid Limit :	420	CL CI	Inorganic clays of low to medium plasticity, gravelly clays, sandy clays, silty clays, lean clays	g 63 mm for	60			dum High	arned soils.
SOILS mm is			OL	Organic silts and clays of low plasticity	passing .	8 8				10120
E GRAINED SOILS less than 63 mm is			МН	Inorganic silts, mic- aceous or diato-maceous fine sands or silts, elastic silts	gradation curve of material	Plastic Index (%)			4	Side Restricts
ш Ф	SILTS & CLA (Liquid Limit	SCHOOL (1977)	СН	Inorganic clays of high plasticity, fat clays	curve	100000	597	0	O MHSC	98
FIN			ОН	Organic silts and clays of high plasticity	adation	10	Zen	"	4 CL	
more than half	HIGHLY OR	GANIC	PT	Peat and other highly organic soils	Use the gr		0 10 20	so 40 Liqu	se es aid Limit (%)	70 80 90 100





Grain size analysis is performed by two processes depending on particle size. Sand silt and clay particles are assessed using a standardised hydrometer test, and coarse sand and larger is assessed through sieving by USCS certified sieves. For more detail see the following section.

Soil Classification	Particle Size	
Clay	Less than 0.002mm	
Silt	0.002 – 0.06mm	
Fine/Medium Sand	0.06 – 2.0mm	
Coarse Sand	2.0mm – 4.75mm	
Gravel	4.75mm – 60.00mm	

1.4 Bearing Capacities and DCP testing.

DCP and PSP weighted penetrometer tests – Dynamic Cone Penetrometer (DCP) and Perth Sand Penetrometer (PSP) tests are carried out by driving a rod into the ground with a falling weight hammer and measuring the blows for successive 100mm increments of penetration. Normally, there is a depth limitation of 1.2m but this may be extended in certain conditions by the use of extension rods. The methods for the two tests are quite similar.

- Dynamic Cone Penetrometer a 16mm rod with a 20mm diameter cone end is driven with a 9kg hammer dropping 510mm (AS 1289, Test 6.3.2).
- Perth Sand Penetrometer a 16mm diameter flat-ended rod is driven with a 9kg hammer, dropping 600mm (AS 1289 Test 6.3.3). This test was developed for testing the density of sands and is mainly used in granular soils and filling.

Site Anomalies – During construction GES will need to be notified of any major variation to the foundation conditions as predicted in this report.




Development Application: Development Application - 46 Friendship Drive, Sorell - P1.pdf







1.5 Batter Angles for Embankments (Guide Only)

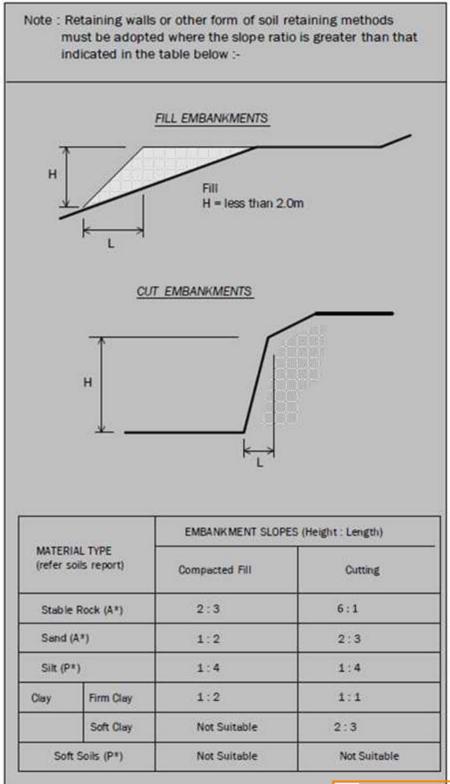



Development Application: Development Application - 46 Friendship Drive, Sorell - P1.pdf



Glossary of Terms

Bearing Capacity – Maximum bearing pressure that can be sustained by the foundation from the proposed footing system under service loads which should avoid failure or excessive settlement.

Clay – (Mineral particles less than 0.002mm in diameter). Fine grained cohesive soil with plastic properties when wet. Also includes sandy clays, silty clays, and gravelly clays.

Dynamic Cone Penetrometer (DCP) – Field equipment used to determine underlying soil strength and therefore bearing capacity (kPa) by measuring the penetration of the device into the soil after each hammer blow.

Dispersive soil – A soil that has the ability to pass rapidly into suspension in water.

Footing – Construction which transfers the load from the building to the foundation.

Foundation – Ground which supports the building

Landslip – Foundation condition on a sloping site where downhill foundation movement or failure is a design consideration.

Qualified Engineer – A professional engineer with academic qualifications in geotechnical or structural engineering who also has extensive experience in the design of the footing systems for houses or similar structures.

Reactive Site – Site consisting of clay soil which swells on wetting and shrinks on drying by an amount that can damage buildings on light strip footings or unstiffened slabs. Includes sites classified as S, M, H-1, H-2 & E in accordance with AS2870-2011.

Sand – (Mineral particles greater than 0.02mm in diameter). Granular non-cohesive, non-plastic soil that may contain fines including silt or clay up to 15%.

Services – Means all underground services to the site including but not limited to power, telephone, sewerage, water & storm water.

Silt – (Mineral particles 0.002 - 0.02mm in diameter). Fine grained non-cohesive soil, non-plastic when wet. Often confers a silky smoothness of field texture, regularly includes clay and sand to form clayey silts, sandy silts and gravelly silts.

Site – The site title, as denoted by address, lot number, or Certificate of Title (CT) number, or Property Identification Number (PID).

Surface Movement (Ys) – Design movement (mm) at the surface of a reactive site caused by moisture changes.



Development Application: Development Application - 46 Friendship Drive, Sorell - P1.pdf



Disclaimer

This Report has been prepared in accordance with the scope of services between Geo-Environmental Solutions Pty. Ltd. (GES) and the Client. To the best of GES's knowledge, the information presented herein represents the client's requirements at the time of printing of the Report. However, the passage of time, manifestation of latent conditions or impacts of future events may result in findings differing from that discussed in this Report. In preparing this Report, GES has relied upon data, surveys, analyses, designs, plans and other information provided by the Client and other individuals and organisations referenced herein. Except as otherwise stated in this Report, GES has not verified the accuracy or completeness of such data, surveys, analyses, designs, plans and other information.

The scope of this study does not allow for the review of every possible geotechnical parameter or the soil conditions over the whole area of the site. Soil and rock samples collected from the investigation area are assumed to be representative of the areas from where they were collected and not indicative of the entire site. The conclusions discussed within this report are based on observations and/or testing at these investigation points.

This report does not purport to provide legal advice. Readers of the report should engage professional legal practitioners for this purpose as required.

No responsibility is accepted for use of any part of this report in any other context or for any other purpose by third a party.




Development Application: Development Application - 46 Friendship Drive, Sorell - P1.pdf





Site Plan



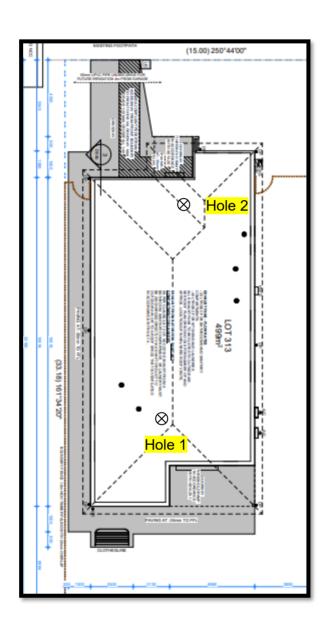



CERTIFICATE OF QUALIFIED PERSON – ASSESSABLE ITEM

Section 321

To:	SJM Property Developments (A	us) F	Pty	Owner /Agent		55
	1/37 Ascot Drive			Address	Form	1 00
	Huntingfield	70	55	Suburb/postcode	·	
Qualified perso	on details:					
Qualified person:	John-Paul Cumming					
Address:	29 Kirksway Place			Phone No:	0.3	6223 1839
	Battery Point	700	04	Fax No:		
Licence No:	AO999 Email address:			@geosolutio	ns.nef	t.au
Qualifications and Insurance details:	Certified Professional Soil Scientist (CPSS stage 2)		(descri	ption from Column r's Determination - allfied Persons for I	3 of the - Certificat	tes
Speciality area of expertise:	AS2870-2011 Foundation Classification	Directo	iption from Column or's Determination alified Persons for .	 Certifica 		
Details of work	(C					
Address:	46 Friendship Drive				Lot No:	
	Sorell	71	72	Certificate of	title No:	184600/3
						13
The assessable item related to this certificate:	Classification of foundation Con according to AS2870-2011 Sorell Council Development Application: Development Application - 46 Friendship Drive, Sorell - P1.pdf Plans Reference:P1 Date Received:27/03/2024	ditio	ns	(description of th certified) Assessable item - a material; - a design - a form of col - a document - testing of a cl system or pl - an inspection performed	includes - nstruction componer lumbing sy	_ nt, building ystem
Certificate deta	ails:					
Certificate type:	Foundation Classification		Sch Dete Qua	scription from Colur edule 1 of the Dire ermination - Certific lified Persons for essable Items n)	ctor's	
This certificate is in	n relation to the above assessable item,	at any	y stage	e, as part of - (ti	ck one)	
	building work, plumbing work or or	plumb	oing ins	stallation or der	nolition	work 🛮
	a building, temporary structure or plumbing installation: □					

In issuing this certificate the following matters are relevant –

Documents: The attached soil report for the address detailed above in 'details of

work'

Relevant

calculations: Reference the above report.

References: AS2870:2011 residential slabs and footings

AS1726:2017 Geotechnical site investigations

CSIRO Building technology file – 18.

Substance of Certificate: (what it is that is being certified)

Site Classification consistent with AS2870-2011.

Scope and/or Limitations

The classification applies to the site as inspected and does not account for future alteration to foundation conditions as a result of earth works, drainage condition changes or variations in site maintenance.

I, John-Paul Cumming certify the matters described in this certificate.

Qualified person:

Signed:

Certificate No:

J9976

19/02/2024

Date:







Development Application: Development Application - 46 Friendship Drive, Sorell - P1.pdf



EXTERIOR SCHEDULE - SCHEME 02 STONE

Builder:	SJM Property Developments				
Revision Date:	30/11/2023				
Revision No:	05				
Design:	Abelia				

Item/Location	Product Code/Name	Finish/Size/Colour/Comments	Manufacturer	Image
Roofing				
Corrugated Roof Sheet	Custom Orb	Colorbond Night Sky		
Fascia & Gutter	Quad Profile	Colorbond Night Sky		P
Downpipes	Round PVC	Painted Dulux Natural White		8-
Doors	'		<u>'</u>	
Front Door	Madison PMAD 101	Translucent Glass	Corinthian	
Rear Garage Door	Solid Core External		Corinthian	
Laundry Door	Solid Core External		Corinthian	
Windows and Flyscreens			<u>'</u>	
Windows		Colorbond Night Sky Frame, Black Hardware		P
Fly Screens - N/A Unless BAL Rated		Colorbond Night Sky Frame, mesh as per BAL Rating		*
Garage Door				
Garage Door	Panelift	Seville, Woodgrain Textured, Colorbond Surfmist	b&d	
Render				
Render A		Colorbond Dune	Dulux	-
Render B		Natural White	Dulux	B-
Bricks				
Refer to Exterior				





Paint							
Porch Post		Colorbond Jasper	Dulux	.			
Alfresco / Porch Ceiling		Natural White	Dulux	-			
Eave Lining		Natural White	Dulux	th.			
Front Door		Colorbond Night Sky	Dulux				
Rear Garage Door & Laundry Door		Colorbond Night Sky	Dulux	-			
Concreting							
Driveway	Exposed Aggregate	Cradle Mountain	Hanson				
Electrical							
Porch / Alfresco Ceiling Lights	Builder's Range LED	White					
Miscellaneous							
Clothesline	Single Fold Down MK2 Lift and Lock	Black	Daytek				
Letterbox	Dune Letterbox	Black	Sandleford				









GENERAL NOTES

BUILDING MEMBRANE

AS PER CLAUSE 3.8.7.2 OF NCC 2019 A PLIABLE BUILDING MEMBRANE TO BE INSTALLED THAT COMPLIES WITH AS/NZS 4200.1 AND TO BE INSTALLED IN ACCORDANCE WITH AS/NZS 4200.2 AND MUST BE A VAPOUR PERMEABLE MEMBRANE FOR CLIMATE ZONES 6/7/8.

<u>DOORS - WATER CLOSET</u> PROVIDE "LIFT-OFF" HINGES TO ALL WC DOORS.

DOORS - INTERNAL GARAGE

PROVIDE DOOR SEAL AS PER NCC 2019 CLAUSE 3.12.3.3.

DOWNPIPES - TEMPORARY

TEMPORARY DOWNPIPES TO BE INSTALLED DURING CONSTRUCTION TO PREVENT WATER PONDING NEAR THE SLAB.

EXHAUST FANS - FLOW RATES

- 25 LTR/SEC FOR BATHROOMS AND SANITARY COMPARTMENTS, - 40 LTR/SEC FOR KITCHENS AND LAUNDRIES.

ALL EXHAUST FANS TO BE DUCTED TO OUTSIDE AIR. SEE ROOF PLAN DRWG NO D08 FOR NUMBER OF AND APPROX. LOCATION OF WHIRLYBIRD ROOF VENTS.

EXHAUST FROM BATHROOM, SANITARY

COMPARTMENT OR LAUNDRY

AS PER CLAUSE 3.8.7.3 OF NCC 2019 EXHAUST FROM A BATHROOM, SANITARY COMPARTMENT, OR LAUNDRY MUST BE DISCHARGED DIRECTLY VIA A SHAFT OR DUCT TO OUTDOOR AIR; OR TO A ROOF SPACE THAT IS VENTILATED IN ACCORDANCE WITH 3.8.7.4.

GLAZING
GLAZING TO COMPLY WITH AS1288 & AS2047.

PLUMBING AND DRAINAGE WORKS TO COMPLY WITH AS3500 2021.

WATERPROOFING - INTERNAL
PROVIDE INTERIOR WATERPROOFING TO COMPLY WITH AS3740 2021.

EMERGENCY POWER SOLUTIONS

PROVIDE EMERGENCY POWER SOLUTIONS (I.E. UNINTERRUPTED POWER SUPPLY (UPS)) SHALL BE PROVIDED.

ASSISTIVE TECHNOLOGY

INTERNET CONNECTION SHALL BE PROVIDED WITH THE ABILITY FOR HIGH INTERNET SPEEDS TO BE MAINTAINED AND STABLE IN NATURE WITH WI-FI COVERAGE THROUGHOUT ALL AREAS OF THE DWELLING

INTERNAL GARAGE CONSTRUCTION

THE INSIDE OF THE GARAGE IS TO INCLUDE THE FOLLOWING:

A. A 10mm ALUMINIUM ANGLE OR KILN DRIED HARDWOOD TIMBER SILL/THRESHOLD (OR OTHER TYPE OF DURABLE UPSTAND) IS INSTALLED ACCROSS THE PEDESTRIAN DOORWAY BETWEEN THE GARAGE AND THE DWELLING. THE UPSTAND/THRESHOLD IS TO BE SEALED TO THE CONCRETE USING A WATERPROOF SEALANT.

REFER TO FINAL DRAINAGE PLANS FOR LOCATIONS OF AGRICULTURAL

SOIL CLASSIFICATION

AS PER SOIL REPORT PROVIDED BY "GEO-ENVIRONMENTAL SOLUTIONS PTY.LTD. (GES)" FILE NO: J9976

DATED: 16 FEBRUARY 2024

WIND RATING: N2

SITE CUT AND BATTER

SITE CUT AND FILL TO BE MINIMUM 1.2m FROM DWELLING BOUNDARY AND BATTERED AT NO MORE THAN 45 DEGREES SITE CUTS/FILLING WORKS NOT SUPPORTED BY RETAINING WALLS SHALL BE FINISHED WITH A BATTER OF 45 DEGREES AND AN AGRICULTURAL DRAIN AT THE BASE OR A SPOON DRAIN AT THE END OF ANY FUTURE PAVING EXTERNAL WALL FOOTINGS SHALL NOT BE FOUNDED AT GREATER DEPTHS THAN THE ADJOINING BUILDING FOOTINGS. STOP WORKS AND CONTACT THE OFFICE IMMEDIATELY IF THE ABOVE CANNOT BE

STORMWATER DRAIN

CONSTRUCT & DISCHARGE 100 DIA. P.V.C STORM WATER DRAIN TO LEGAL POINT OF DISCHARGE AS DIRECTED BY THE RELEVANT AUTHORITY. MIN FALL 1:100 PROVIDE INSPECTION OPENINGS AT 9000 MAX CTRS OR AT EVERY CHANGE OF DIRECTION. DP DENOTES 100x50 DOWNPIPES AT 12000 MAX CTRS. PROVIDE 100 DIA. SEWERGRADE S.W DRAIN UNDER SLAB AND DRIVEWAY.

POSITION OF THE FRONT GARDEN TAP & WATER METER IS BY WATER AUTHORITY, THE FULL COST OF RELOCATION IS AT THE OWNER'S

LEVELS SHOWN ARE TO AN ARBITRARY DATUM AND ARE TO BE USED AS A GUIDE ONLY. OWNER/BUILDER TO CHECK AND VERIFY ON SITE PRIOR TO ANY WORK BEING CARRIED OUT. ALL LEVELS ON DRAWINGS ARE NOMINAL AND MAY ALTER DUE TO SITE CONDITIONS UP TO 50mm EITHER WAY.

GENERAL

- CONTRACTOR IS RESPONSIBLE FOR SETTING OUT AND CHECKING ALL LEVELS AND MEASUREMENTS ON SITE PRIOR TO COMMENCEMENT OF
- ALL WORK IS SUBJECT TO INSPECTION AND APPROVAL OF RELEVANT BUILDING SURVEYOR.
- ALL WORK SHOWN TO BE CARRIED OUT IN GOOD WORKMAN LIKE MANNER IN ACCORDANCE WITH "NATIONAL CONSTRUCTION
- NO RESPONSIBILITY IS TAKEN FOR WORK DONE AFTER ACCEPTANCE OF PLANS BY CLIENT.
- WORK SHOWN TO BE IN ACCORDANCE WITH SPECIFICATIONS/COMPUTATIONS SUPPLIED.

-EXCAVATE FOOTINGS AND DRAINS AS SHOWN, KEEP EXCAVATIONS DRY AND BACKFILL WITH APPROVED MATERIALS FREE OF ANY BUILDING

ENERGY RATING

- ALL EXTERNAL DOORS AND WINDOWS TO UTILITY ROOMS (NON-HEATED BATHROOMS, LAUNDRIES; STORAGE ROOMS) TO BE WEATHER-SEALED WITH WEATHER-STRIPPING BETWEEN THE DOOR AND THE FRAME, AND A DRAFT EXCLUDER FITTED AT THE BOTTOM OF THE DOOR TO CREATE A TIGHT SEAL WHEN CLOSED
- ALL OPENABLE WINDOWS TO HAVE WEATHER-STRIPPING BETWEEN THE FRAME AND THE SASH TO CREATE A TIGHT SEAL WHEN CLOSED.
- ENTRY DOOR TO BE WEATHER-STRIPPED
- ALL GENERAL BUILDING GAPS AND CRACKS TO BE FILLED.
- ALL REFLECTIVE FOIL TO BE INSTALLED TO MANUFACTURERS RECCOMENDATIONS AND TO RUN CONTIGUOUSLY FROM BOTTOM PLATE TO TOP PLATE WITH ALL GAPS TAPED. ALL RIPS IN FOIL AND PENETRATIONS TO BE RE-TAPED
- ONLY NON-VENTED DOWNLIGHTS. AND SKYLIGHTS TO BE USED
- EXHAUST FANS TO BE SELF-SEALING, OR FITTED WITH A SELF CLOSING DEVICE TO PROVIDE A SEAL TO UNWANTED VENTILATION.
- R2.0 BATTS TO EXTERNAL WALLS.
- R2.0 BATTS TO GARAGE INTERNAL WALLS
- R4 0 BATTS TO CEILINGS
- ALL WINDOWS/SLIDING DOORS ARE TO BE ALUMINIUM FRAMED SINGLE GLAZED CLEAR GLASS WITH A MINIMUM U-VALUE & SHGC AS LISTED IN THE ENERGY REPORT.

DRAWING REGISTER

NUMBER	DRAWING NAME	
D00a	NOTES & DRAWING REGISTER	
D00b	WET AREA WATER PROOFING	
D01a	SITE PLAN	
D01b	SITE EXCAVATION PLAN	
D01c	SITE SURVEY PLAN	
D02	FLOOR PLAN	
D03a	ELEVATIONS	
D03b	ELEVATIONS - NOTES	
D04a	SECTIONS	
D04b	SECTIONS - TYPICAL	
D05	WINDOW & DOOR SCHEDULE	
D06a	INTERNAL ELEVATIONS - KITCHEN	
D06b	INTERNAL ELEVATIONS - KITCHEN	
D06c	INTERNAL ELEVATIONS - KITCHEN	
D06d	INTERNAL ELEVATIONS - TYPICAL	
D07a	WET AREA ELEVATIONS - WC	
D07b	WET AREA ELEVATIONS - WC	
D07c	WET AREA ELEVATIONS - ENSUITE 1	
D07d	WET AREA ELEVATIONS - ENSUITE 1	
D07e	WET AREA ELEVATIONS - ENSUITE 2	
D07f	WET AREA ELEVATIONS - ENSUITE 2	
D07g	WET AREA ELEVATIONS - LAUNDRY	
D08	ROOF PLAN	
D09	SLAB PLAN	
D10a	SLAB PENETRATION PLAN	
D10b	PLUMBING PLAN	
D10c	STORMWATER MANAGEMENT PLAN	
D11	FLOOR FINISHES PLAN	
D12	ELECTRICAL & LIGHTING PLANS	
D13	SPRINKLER PLAN	
D14	LANDSCAPE PLAN	

BUSHFIRE ASSESSMENT THIS PARCEL IS 'BAL-LOW' IN A DESIGNATED

BUSHFIRE PRONE AREA 'NO' BAL REQUIREMENTS

Sorell Council

plication - 46 Friendship Drive, Sorell - P1.pdf

Plans Reference:P1 e Received:27/03/2024

IMPORTANT NOTES

- WRITTEN DIMENSIONS TAKE PRECEDENCE OVER DRAWN SCALE. ALL LEVELS, DIMENSIONS AND EXISTING CONDITIONS TO BE CHECKED BY CONTRACTOR AND VERIFIED BEFORE COMMENCEMENT OF WORKS ON SITE, ANY DISCREPANCIES TO BE REPORTED TO THE OFFICE IMMEDIATELY
- WINDOW SIZES ARE NOMINAL ONLY, SIZES MAY CHANGE DUE TO AVAILABILITY.
- AVAILABILITY.
 FLOOR PLANS ARE DIMENSIONED TO TIMBER STUD FRAME.
 ALL WORKS MUST BE EXECUTED IN A WORKMANLIKE MANOR AND
- MUST CONFORM TO THE LATEST APPLICABLE AUSTRALIAN THESE DRAWINGS SHALL NOT BE ALTERED, REPRODUCED, COPIED
- IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION FROM ACCESS LIVING GROUP.
- ALL DIMENSION ARE NOMINAL AND MUST BE VERIFIED ON SITE

1/37 Ascot Dr, Huntingfield TAS 7055

P +61 3 6289 6601

HPS-ABELIA-12.5(05H.02) Client: SJM PROPERTY DEVELOPMENTS

Location: 46 FRIENDSHIP DRIVE, SORELL TAS 7172

Drawing: NOTES & DRAWING REGISTER

Facade: C-BYRON		
02-STONE		

	DRAWING DETAILS		
	22/03/2024 4:35:10 pm		
	SCALE	SHEET SIZE	
	1:100	A3	
	JOB 4 O	ONI	
	488N		
ons ed	No: D00a Is	sue A02	

All dimension

WET AREA WATER PROOFING

(1) BUILDING ELEMENTS IN WET AREAS WITHIN A BUILDING MUST BE

PROTECTED WITH A WATERPROOFING SYSTEM.
(2) THE WATER PROOFING SYSTEM IN (1) MUST EITHER BE WATERPROOF OR WATER RESISTANT IN ACCORDANCE WITH 10.2.2 TO

10.2.2 SHOWER AREA (ENCLOSED AND UNENCLOSED)

(1) FOR A SHOWER AREA WITH A HOB, STEP-DOWN OR LEVEL THRESHOLD. THE FOLLOWING APPLIES.

(A) THE FLOOR OF THE SHOWER AREA MUST BE WATERPROOF INCLUDING ANY HOB OR STEP-DOWN (SEE FIGURE 10.2.2); AND

(B) THE WALLS OF THE SHOWER AREA MUST BE WATERPROOF NOT LESS THAN 1800 MM ABOVE THE FLOOR SUBSTRATE (SEE FIGURE 10.2.2).

(C) WALL JUNCTIONS AND JOINTS WITHIN THE SHOWER AREA MUST BE WATERPROOF NOT LESS THAN 40 MM EITHER SIDE OF THE JUNCTION (SEE FIGURE 10.2.2).

(D) WALL/FLOOR JUNCTIONS WITHIN THE SHOWER AREA MUST BE WATERPROOF (SEE FIGURE 10.2.2).
(E) PENETRATIONS WITHIN THE SHOWER AREA MUST BE WATERPROOF.

(2) A SHOWER WITH A PREFORMED SHOWER BASE MUST ALSO COMPLY WITH THE REQUIREMENTS OF (1), EXCEPT FOR (A) WHICH IS NOT APPLICABLE.

10.2.3 AREA OUTSIDE SHOWER AREA
(1) FOR CONCRETE, COMPRESSED FIBRE-CEMENT AND FIBRE-CEMENT SHEET FLOORING, THE FLOOR OF THE ROOM MUST BE WATER

(2) FOR TIMBER FLOORS INCLUDING PARTICLEBOARD, PLYWOOD AND OTHER TIMBER BASED FLOORING MATERIALS, THE FLOOR OF THE ROOM MUST BE WATERPROOF

(3) WALL/FLOOR JUNCTIONS MUST BE

(A) WATER PROOF; AND

(B) WHERE A FLASHING IS USED, THE HORIZONTAL LEG MUST BE NOT LESS THAN 40 MM

10.2.4 AREAS ADJACENT TO BATHS AND SPAS WITHOUT SHOWERS

(1) FOR AREAS ADJACENT TO ALL BATHS AND SPAS, THE FOLLOWING

(A) FOR CONCRETE, COMPRESSED FIBRE-CEMENT AND FIBRE CEMENT SHEET FLOORING, THE FLOOR OF THE ROOM MUST BE WATER RESISTANT

(B) FOR TIMBER FLOORS INCLUDING PARTICLEBOARD, PLYWOOD AND OTHER TIMBER BASED FLOORING MATERIALS, THE FLOOR OF THE ROOM MUST BE WATERPROOF.

(C) TAP AND SPOUT PENETRATIONS MUST BE WATERPROOF WHERE

THEY OCCUR IN HORIZONTAL SURFACES.
(2) FOR AREAS ADJACENT TO NON-FREESTANDING BATHS AND SPAS, THE FOLLOWING APPLIES:

(A) WALLS MUST BE WATER RESISTANT (SEE FIGURE 10.2.4A AND FIGURE 10.2.4B)

(I) TO A HEIGHT OF NOT LESS THAN 150 MM ABOVE THE VESSEL, FOR THE EXTENT OF THE VESSEL. WHERE THE VESSEL IS WITHIN 75 MM OF A WALL; AND

(II) FOR ALL EXPOSED SURFACES BELOW VESSEL LIP.

(B) WALL JUNCTIONS AND JOINTS MUST BE WATER RESISTANT WITHIN 150 MM ABOVE A VESSEL FOR THE EXTENT OF THE VESSEL.

(C) WALL/FLOOR JUNCTIONS MUST BE WATERPROOF FOR THE EXTENT OF THE VESSEL (SEE FIGURE 10.2.4A AND FIGURE 10.2.4B).

(3) FOR INSERTED BATHS AND SPAS, THE FOLLOWING APPLIES

(A) FOR FLOORS AND HORIZONTAL SURFACES: (I)ANY SHELF AREA ADJOINING THE BATH OR SPA MUST BE WATERPROOF AND INCLUDE A WATERSTOP UNDER THE VESSEL LIP.

(II) THERE ARE NO REQUIREMENTS FOR THE FLOOR UNDER A BATH OR

(B) FOR WALLS:

IMPORTANT NOTES:

AVAILABILITY.

(I) WATERPROOF TO NOT LESS THAN 150 MM ABOVE THE LIP OF A BATH OR SPA

(II) THERE ARE NO REQUIREMENTS FOR THE FLOOR UNDER A BATH OR

(C) FOR WALL JUNCTIONS AND JOINTS, THE FOLLOWING APPLIES:

(I) WATERPROOF JUNCTIONS WITHIN 150 MM OF A BATH OR SPA. (II) THERE ARE NO REQUIREMENTS FOR JUNCTIONS AND JOINTS IN WALLS BENEATH THE LIP OF A BATH OR SPA.

(D) TAP AND SPOUT PENETRATIONS MUST BE WATERPROOF WHERE THEY OCCUR IN HORIZONTAL SURFACES

WRITTEN DIMENSIONS TAKE PRECEDENCE OVER DRAWN SCALE. ALL LEVELS, DIMENSIONS AND EXISTING CONDITIONS TO BE CHECKED BY CONTRACTOR AND VERIFIED BEFORE COMMENCEMENT OF WORKS ON SITE, ANY DISCREPANCIES TO BE

WINDOW SIZES ARE NOMINAL ONLY, SIZES MAY CHANGE DUE TO

ALL DIMENSION ARE NOMINAL AND MUST BE VERIFIED ON SITE

REPORTED TO THE OFFICE IMMEDIATELY

(1) FOR WALLS ADJOINING OTHER TYPES OF VESSELS (E.G. SINK, BASIN OR LAUNDRY TUB), THE FOLLOWING APPLIES:

(A) WALLS MUST BE WATER RESISTANT TO A HEIGHT OF NOT LESS THAN 150 MM ABOVE THE VESSEL FOR THE EXTENT OF THE VESSEL, WHERE THE VESSEL IS WITHIN 75 MM OF A WALL (SEE

(B) WATERPROOF WALL JUNCTIONS WHERE A VESSEL IS FIXED TO A WALL

(C) WATERPROOF TAP AND SPOUT PENETRATIONS WHERE THEY OCCUR IN SURFACES REQUIRED TO BE WATERPROOF OR WATER RESISTANT.

(2) FOR LAUNDRIES AND WCS, THE FOLLOWING APPLIES: (A) THE FLOOR OF THE ROOM MUST BE WATER RESISTANT.

(B) WALL/FLOOR JUNCTIONS MUST BE WATER RESISTANT, AND WHERE A FLASHING IS USED, THE HORIZONTAL LEG MUST NOT BE LESS

(3) FOR WCS WITH HANDHELD BIDET SPRAY INSTALLATIONS, THE FOLLOWING APPLIES:

(A) THE FLOOR OF THE ROOM MUST BE WATERPROOF. (B) WALLS MUST BE--

(I) WATERPROOF IN WC AREA WITHIN A 900 MM RADIUS FROM THE WALL CONNECTION OF THE HANDHELD BIDET SPRAY DEVICE TO A HEIGHT OF NOT LESS THAN 150 MM ABOVE THE FLOOR

SUBSTRATE: AND (II) WATER RESISTANT IN WC AREA WITHIN A 900 MM RADIUS FROM THE WALL CONNECTION OF THE HANDHELD BIDET DEVICE TO NOT LESS THAN 1200 MM ABOVE THE FINISHED FLOOR LEVEL OF THE

(C) WALL JUNCTIONS WITHIN THE WC AREA WITHIN 900 MM RADIUS FROM THE WALL CONNECTION OF THE HANDHELD BIDET SPRAY DEVICE MUST BE WATERPROOF.

(D) WALL/FLOOR JUNCTIONS WITHIN THE WC AREA WITHIN 1000 MM RADIUS FROM THE WALL CONNECTION OF THE HANDHELD BIDET SPRAY DEVICE MUST BE WATERPROOF (E) PENETRATIONS IN THE WC AREA MUST BE WATERPROOF

10.2.6 WATERPROOFING SYSTEMS

(1) FOR THE PURPOSES OF THIS PART, A WATERPROOFING SYSTEM IS DEEMED

(A) WATERPROOF, IF IT COMPLIES WITH (2); OR (B) WATER RESISTANT, IF IT COMPLIES WITH (3).

(2) FOR A WATERPROOFING SYSTEM REQUIRED TO BE WATERPROOF IN ACCORDANCE WITH 10.2.2 TO 10.2.5, THE MATERIALS NOMINATED IN 10.2.8 MUST BE USED.

(3) FOR A WATERPROOFING SYSTEM REQUIRED TO BE WATER RESISTANT IN ACCORDANCE WITH 10.2.2 TO 10.2.5, THE MATERIALS NOMINATED IN 10.2.9 MUST BE USED IN CONJUNCTION WITH THE MATERIALS IN 10.2.10. DETAILS

FIGURE NOTES

WALL/FLOOR JUNCTION HEIGHTS ARE TO BE AS PER 10.2.2 TO 10.2.6 (AS APPLICABLE).


WHERE A SHOWER IS ABOVE A BATH OR SPA, USE REQUIREMENTS FOR SHOWER


Sorell Council

plication - 46 Friendship Drive, Sorell - P1.pdf


lans Reference:P1 ate Received:27/03/2024


AREA ADJACENT TO BATHS AND SPAS WITHOUT SHOWERS FOR CONCRETE, COMPRESSED FIBRE-CEMENT AND FIBRE-CEMENT SHEET FI OORING

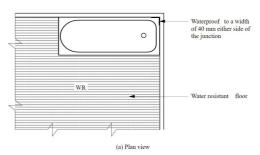

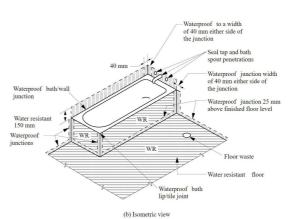


EXTENT OF TREATMENT FOR SHOWER AREAS - CONCRETE COMPRESSED FIBRE-CEMENT AND FIBRE-CEMENT SHEET FLOORS

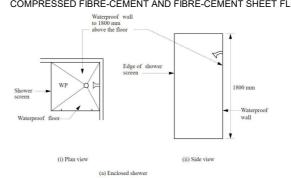


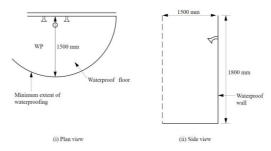




AREAS ADJACENT TO BATHS AND SPA WITHOUT SHOWERS FOR TIMBER FLOORS INCLUDING PARTICLE-BOARD, PLYWOOD AND OTHER FLOOR MATERIALS.

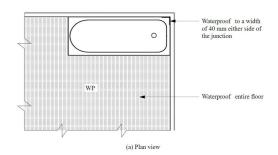


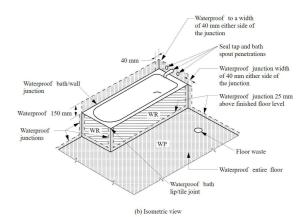

BATH AND VESSEL ABUTTING WALL - AREAS TO BE PROTECTED

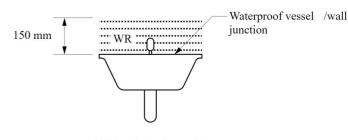

(a) Vessel abutting wall

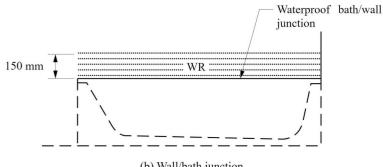

(b) Wall/bath junction

1/37 Ascot Dr, Huntingfield TAS 7055

P +61 3 6289 6601

HPS-ABELIA-12.5(05H.02) Client: SJM PROPERTY DEVELOPMENTS


Location: 46 FRIENDSHIP DRIVE, SORELL TAS 7172


Drawing: WET AREA WATER PROOFING

Facade: C-BYRON 02-STONE

DRAWING DETAILS 22/03/2024 4:35:10 pm SHEET SIZE 1:100 A3 488N All dimensions A02

AVAILABILITY.
FLOOR PLANS ARE DIMENSIONED TO TIMBER STUD FRAME.
ALL WORKS MUST BE EXECUTED IN A WORKMANLIKE MANOR AND MUST CONFORM TO THE LATEST APPLICABLE AUSTRALIAN THESE DRAWINGS SHALL NOT BE ALTERED, REPRODUCED, COPIED IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION FROM ACCESS LIVING GROUP. developments

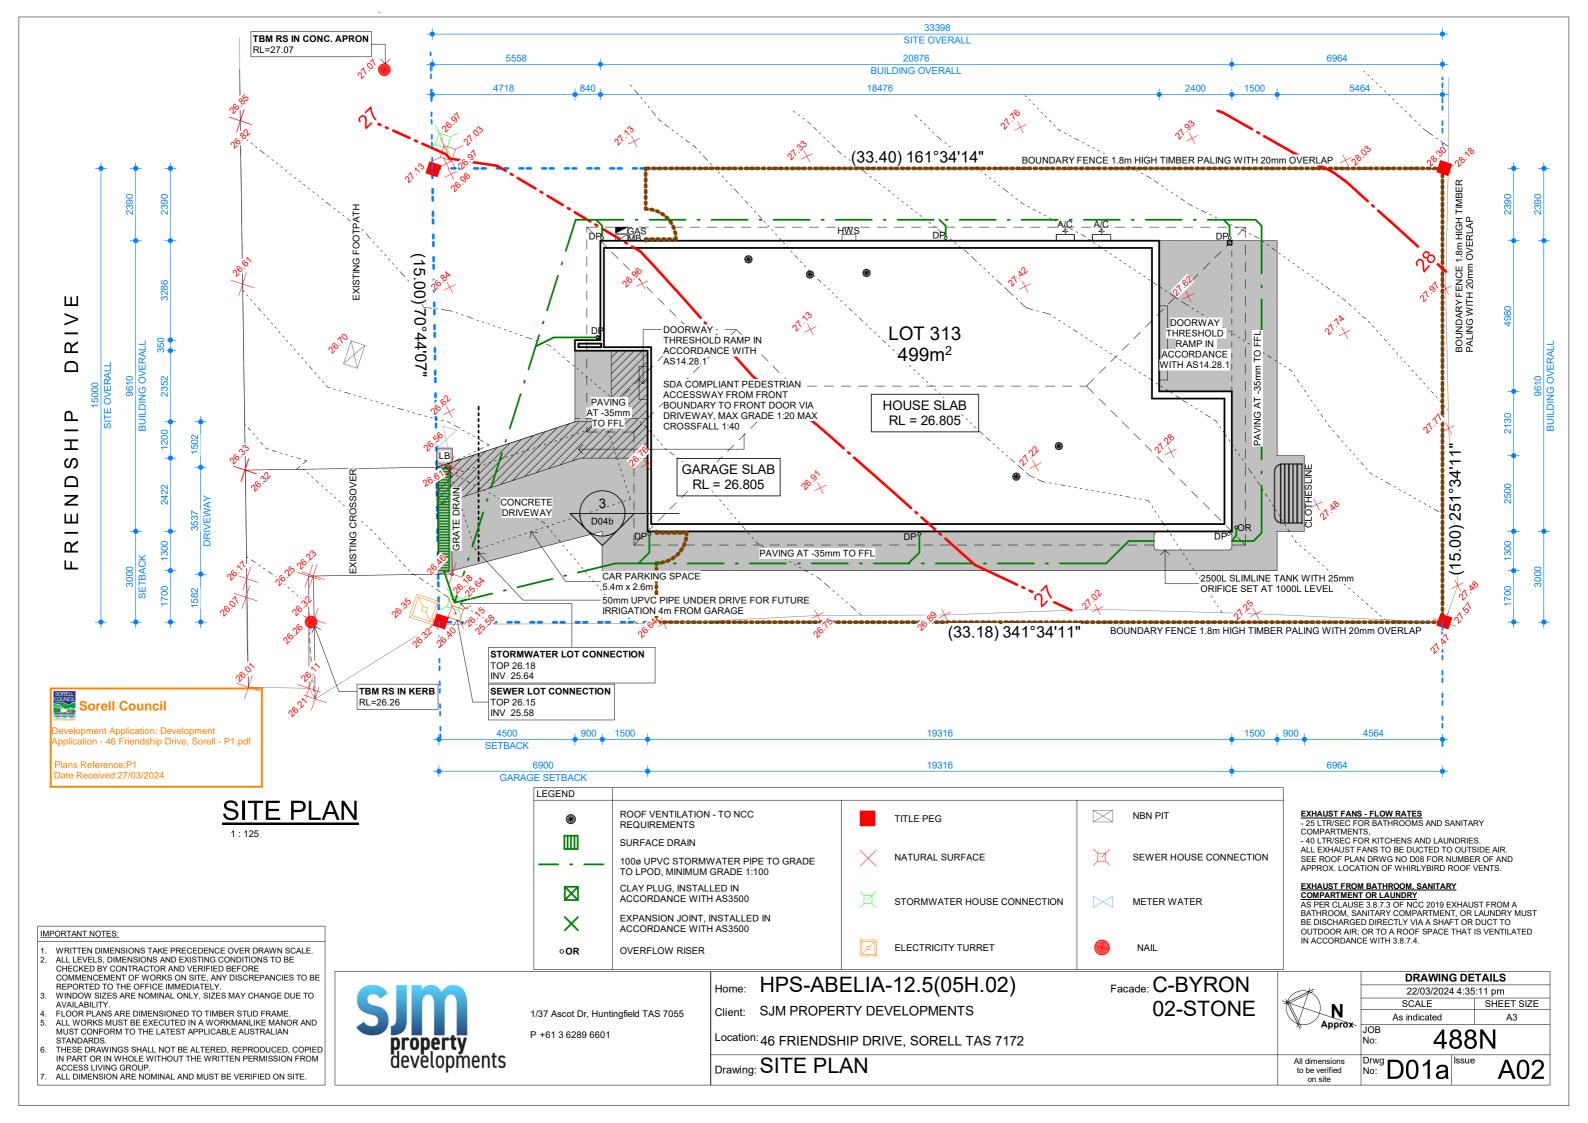

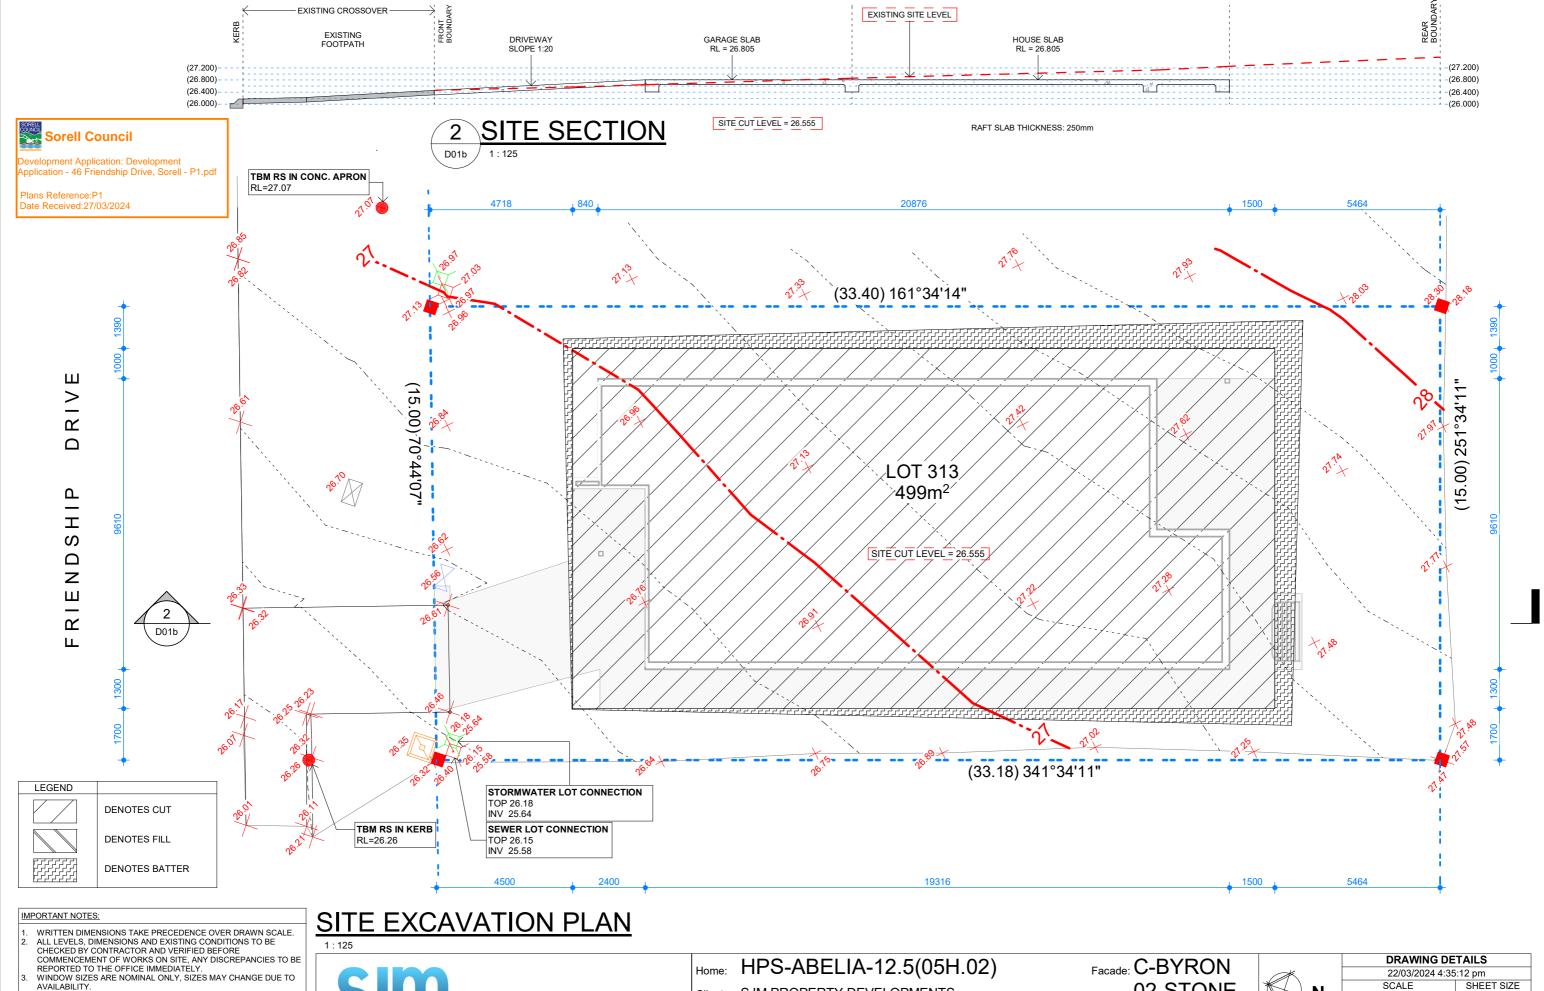

- AVAILABILITY.
 FLOOR PLANS ARE DIMENSIONED TO TIMBER STUD FRAME.
 ALL WORKS MUST BE EXECUTED IN A WORKMANLIKE MANOR AND
 MUST CONFORM TO THE LATEST APPLICABLE AUSTRALIAN
- STANDARDS.
 THESE DRAWINGS SHALL NOT BE ALTERED, REPRODUCED, COPIED IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION FROM ACCESS LIVING GROUP.
- ALL DIMENSION ARE NOMINAL AND MUST BE VERIFIED ON SITE


property developments

1/37 Ascot Dr, Huntingfield TAS 7055 P +61 3 6289 6601

Client: SJM PROPERTY DEVELOPMENTS Location: 46 FRIENDSHIP DRIVE, SORELL TAS 7172 Drawing: SITE EXCAVATION PLAN

02-STONE

488N

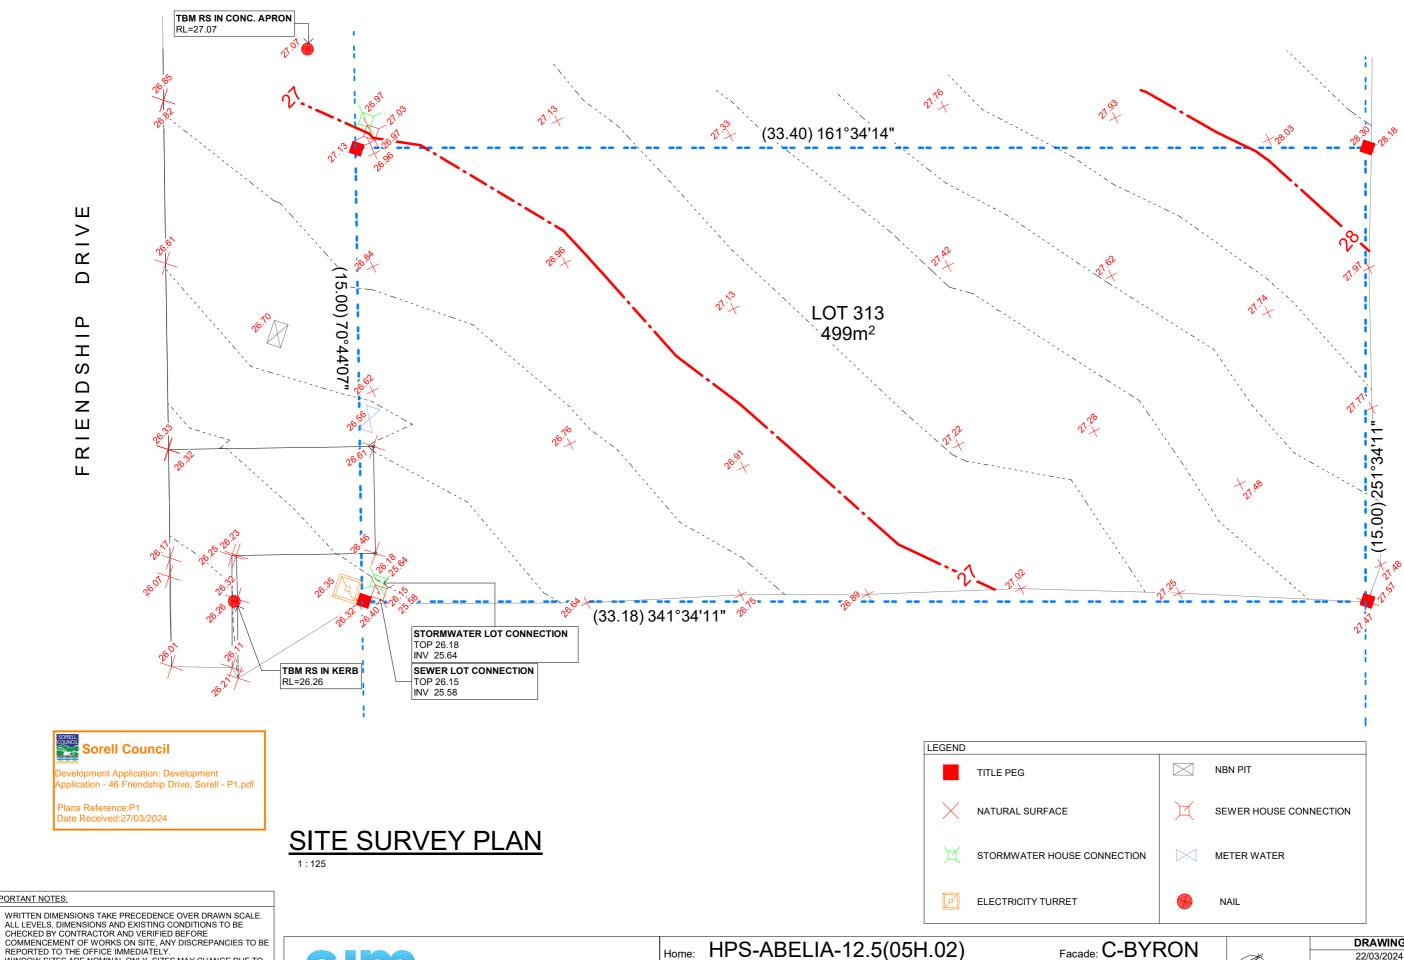

IMPORTANT NOTES:

- ALL LEVELS, DIMENSIONS AND EXISTING CONDITIONS TO BE CHECKED BY CONTRACTOR AND VERIFIED BEFORE COMMENCEMENT OF WORKS ON SITE, ANY DISCREPANCIES TO BE REPORTED TO THE OFFICE IMMEDIATELY. WINDOW SIZES ARE NOMINAL ONLY, SIZES MAY CHANGE DUE TO AVAILABILITY.

- AVAILABILITY.
 FLOOR PLANS ARE DIMENSIONED TO TIMBER STUD FRAME.
 ALL WORKS MUST BE EXECUTED IN A WORKMANLIKE MANOR AND
 MUST CONFORM TO THE LATEST APPLICABLE AUSTRALIAN
 STANDARDS.
 THESE DRAWINGS SHALL NOT BE ALTERED, REPRODUCED, COPIED
 IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION FROM
 ACCESS LIVING GROUP.
 ALL DIMENSION ARE NOMINAL AND MUST BE VERIFIED ON SITE.

property developments

1/37 Ascot Dr, Huntingfield TAS 7055 P +61 3 6289 6601

Client: SJM PROPERTY DEVELOPMENTS


02-STONE

N Approx

DRAWING DETAILS 22/03/2024 4:35:13 pm As indicated JOB 488N

Location: 46 FRIENDSHIP DRIVE, SORELL TAS 7172 Drawing: SITE SURVEY PLAN

No: D01c Issue A02

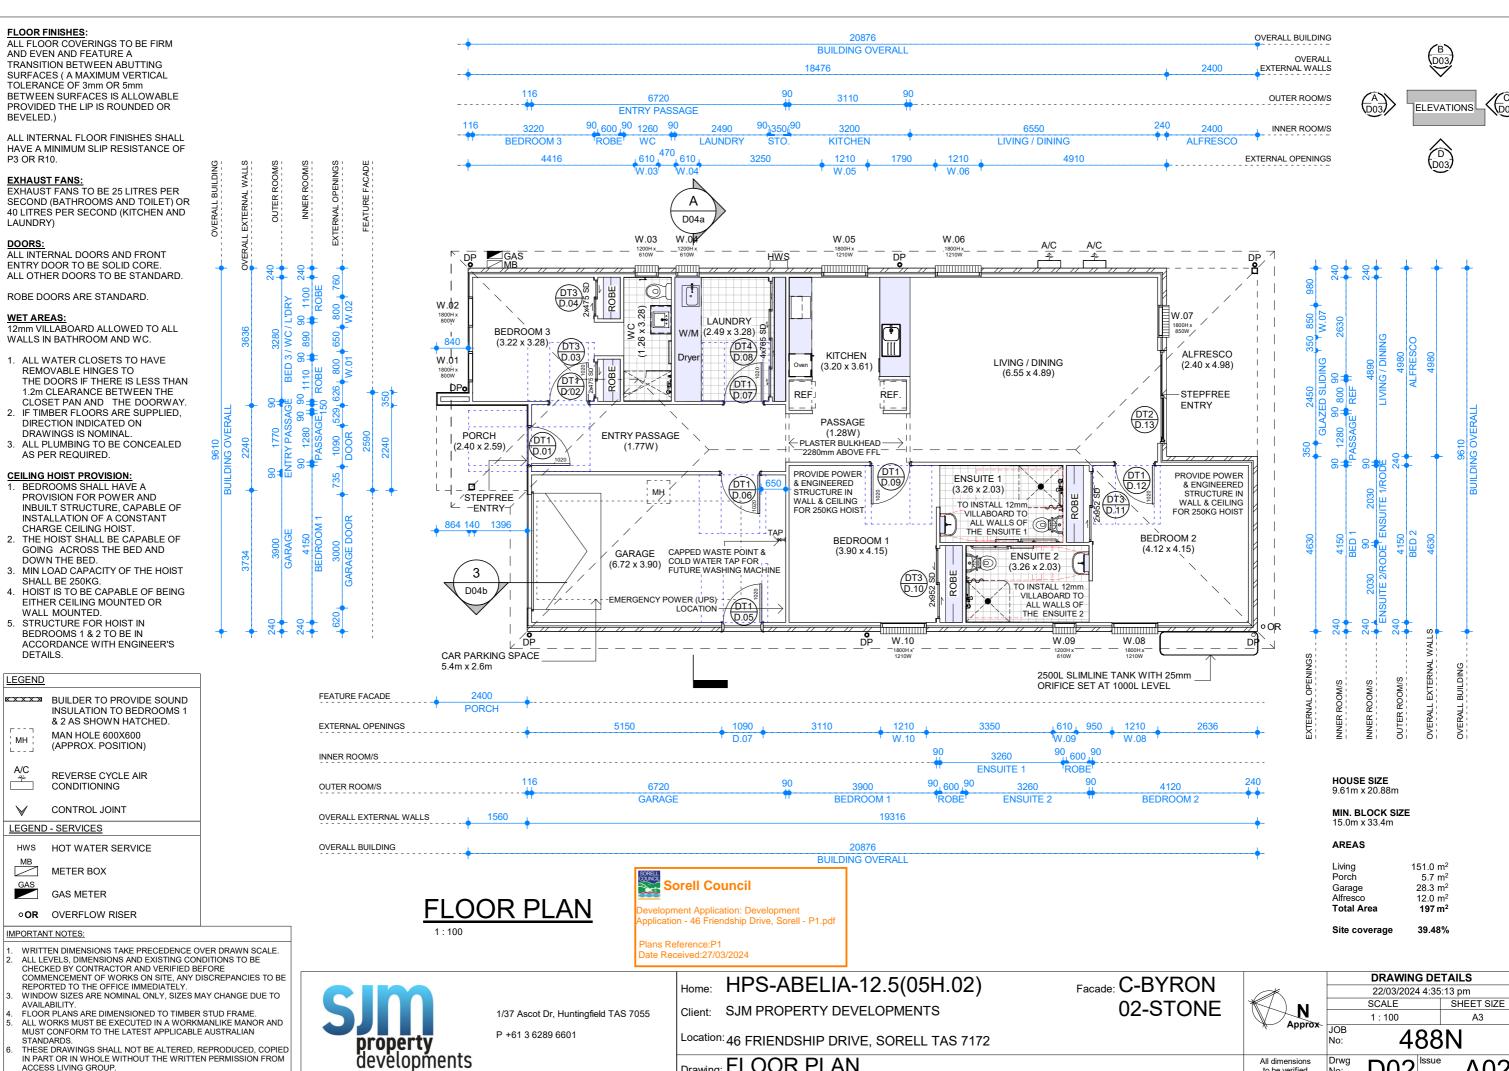


Drawing: FLOOR PLAN

All dimensions

A02

THESE DRAWINGS SHALL NOT BE ALTERED, REPRODUCED, COPIED IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION FROM ACCESS LIVING GROUP.

ALL DIMENSION ARE NOMINAL AND MUST BE VERIFIED ON SITE

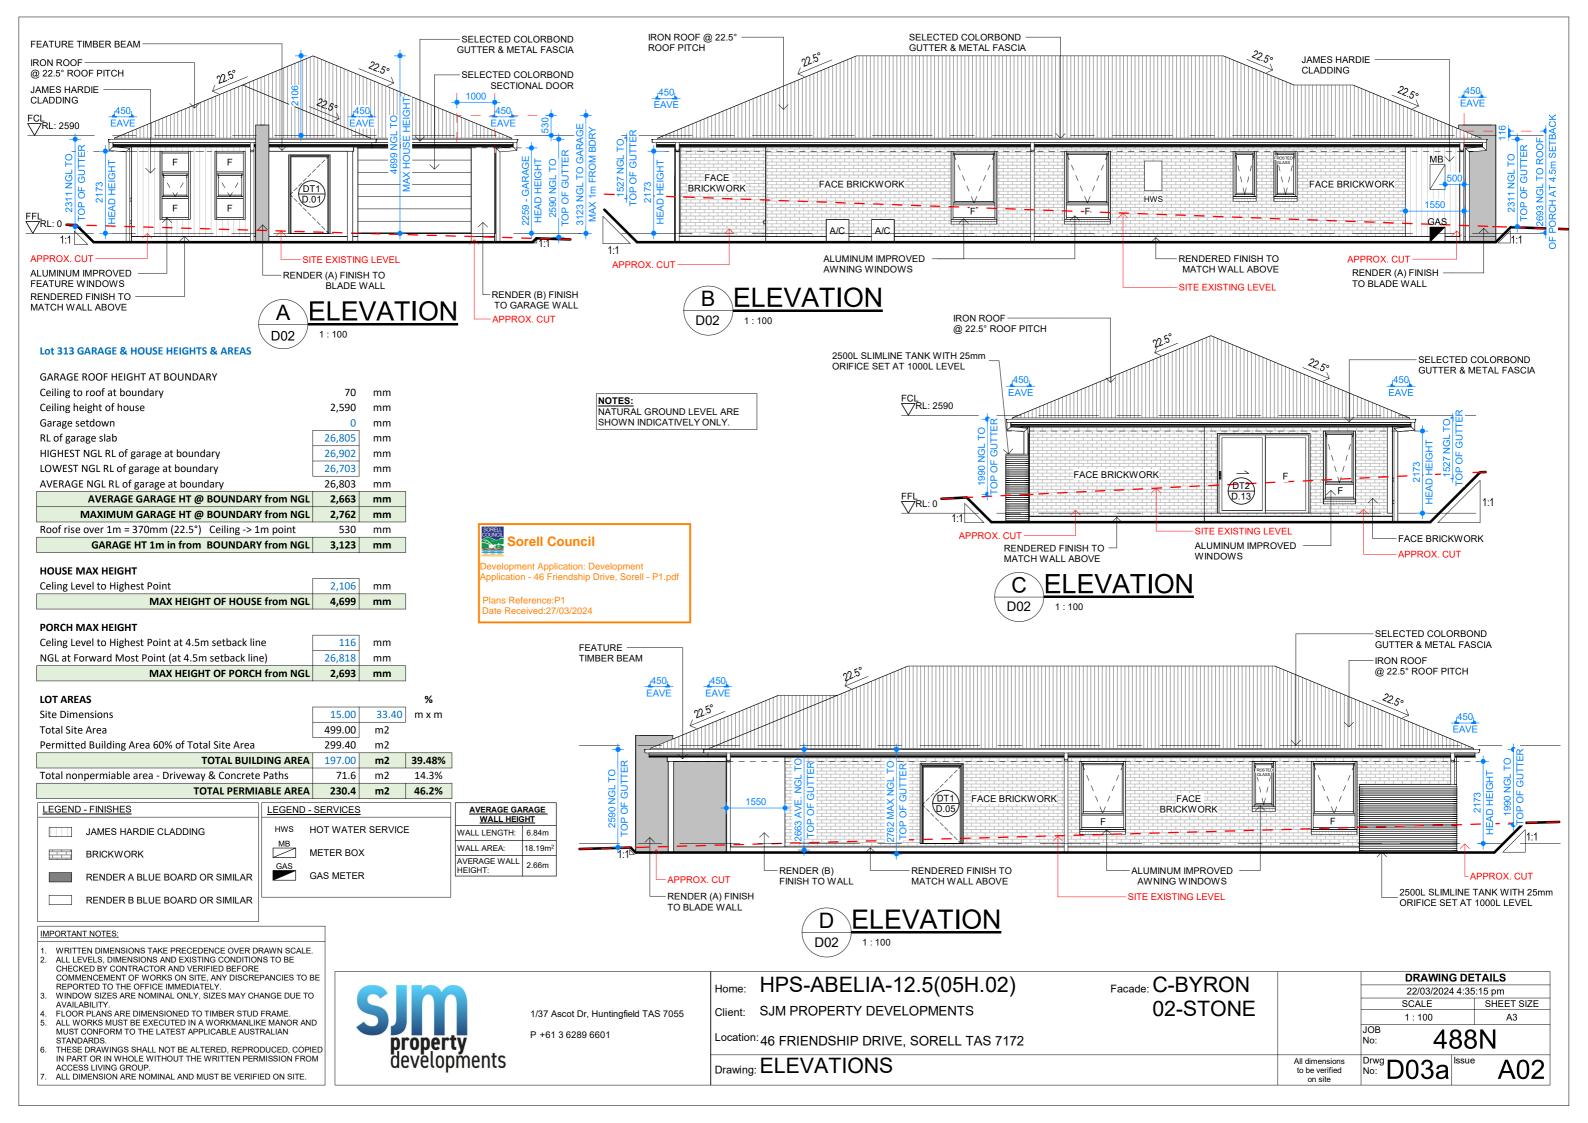

GENERAL NOTES

GENERAL NOTES:

- 1. ALL EXTERNAL WINDOWS AND DOOR ARE TO BE DESIGNED AND TESTED IN ACCORDANCE WITH AS 2047, INCLUDING PROVISIONS FOR SUBSILLS AND FLASHING IN ANY PROPRIETARY SYSTEMS OFFERED FOR THIS PRODUCT.
- 2. ALL GLAZING SHALL BE IN ACCORDANCE WITH AS 1288-2006 WHEREIN GLAZING WITHIN 500mm OF THE FLOOR LEVEL SHALL BE 5mm THICKENED ANNEALED, GLAZED DOORS ASSOCIATED SIDE PANELS SHALL BE 5 38mm I AMINATED SAFETY GLASS AND BATHROOM WINDOWS WITHIN 1.5m OF THE BATH FOR 500mm FROM THE SHOWER ENCLOSURE SHALL BE 3mm TOUGHENED SAFETY GLASS
- 3. WATERPROOFING OF WET AREAS, BEING BATHROOMS, SHOWERS, SHOWER ROOMS, LAUNDRIES, SANITARY COMPARTMENTS AND THE LIKE SHALL BE PROVIDED IN ACCORDANCE WITH AS 3274: WATERPROOFING WET AREA IN RESIDENTIAL BUILDINGS.
- 4. ALL EXHAUST FANS TO BE FITTED WITH DAMPERS AS PER NCC
- 5. EXTERNAL DOORS TO BE WEATHER STRIPPED AND WINDOWS TO COMPLY WITH AS 2047.
- 6. ALL GAPS FROM SERVICE PENETRATIONS ETC ARE TO BE SEALED. AS SHOULD INTERNAL DOORS TO GARAGE.
- 7. ALL CHIMNEYS AND FLUES TO HAVE DAMPERS AS PER BCA REQUIREMENTS 3.12.3.1, IF APPLICABLE
- 8. (LOH) ALL WATER CLOSETS TO HAVE REMOVABLE HINGES TO THE DOORS IF THERE IS LESS THAN 1.2M CLEARANCE BETWEEN THE CLOSEST PAN & THE DOORWAY
- 9. WET AREAS IN ACCORDANCE WITH AUST. STANDARD
- 10. MECHANICAL VENTILATION TO OUTSIDE AIR PROVIDED WHERE REQUIRED AND IN ACCORDANCE WITH B.C.A. P 2 4 5
- 11. MAN HOLE LOCATION MAY BE CHANGED DUE TO TRUSS LAYOUT
- 12. DIMENSIONS RELATING TO FFL & FCL REFER TO OVERALL TOP & BOTTOM PLATE DIMENSIONS NOT ACTUAL CEILING HEIGHTS
- 13. BACKFILL TO EXTERNAL DOORS NOT TO BE GREATER THAN 190MM IN ACCORDANCE WITH NCC '3.9.1.5 THRESHOLDS'

OPENING TO WINDOWS

PROVIDE 125mm RESTRICTION TO ALL OPENING WINDOWS IN BEDROOMS WHERE THE DIFFERENCE BETWEEN THE FLOOR LEVELS OF THE BEDROOM AND THE OUTSIDE FINISHED SURFACE LEVEL IS GREATER THAN 2.0m. IN ACCORDANCE WITH BCA.

CONTROL JOINTS

- CONTROL JOINT IN BRICKS TO BE IN ACCORDANCE WITH AS 3700-2001. ENGINEERS DOCUMENTATION REGARDING CONTROL JOINTS OVER-RIDES THESE DRAWINGS.
- PROVIDE CONTROL TO ALL INTERNAL CORNERS

HEAD HEIGHTS

- WINDOW HEAD HEIGHTS MEASURED FROM THE FINISHED FLOOR LEVEL (SLAB) OF THE HOUSE.
- ALL WINDOW HEAD HEIGHTS INDICATED ARE NOMINAL AND MAY VARY DUE TO VARIANCES IN BRICK SIZES

NOTE: FC/SOFFIT SHEET TO PORTICO CEILING

CONTINUE TO EAVE LINE

NOTE: ENGINEERS TO DESIGN ALL REQUIRED RAMPS TO EXTERNAL ENTRANCES/PORCH.

WINDOW CONTROLS TO BE LOCATED WITHIN EASY REACH FROM EITHER A SEATED OR STANDING POSITION (BETWEEN 600mm TO 1100mm ABOVE FFL) DOORWAYS SHALL HAVE DOOR HANDLES INSTALLED AT BETWEEN 900mm TO 1100mm ABOVE THE FFL. DOOR HANDLES SELECTION AND LOCATION SHALL COMPLY WITH AS1428.1 AS PER THE DOOR HANDLE DETAIL.

GARAGE INTERNAL CONSTRUCTION

THE INSIDE OF THE GARAGE IS TO INCLUDE THE FOLLOWING:

A. CONTROL OF WATER FROM THE GARAGE: I. A 15mm MINIMUM HEIGHT THRESHOLD GRADED SILL (OR OTHER TYPE OF DURABLE GRADED UPSTAND) IS INSTALLED ACROSS THE PEDESTRIAN DOORWAY BETWEEN THE GARAGE AND DWELLING. THE UPSTAND/THRESHOLD IS TO BE SEALED TO THE CONCRETE USING A WATERPROOF SEALANT; OR II. THE GARAGE FLOOR IS GRADED WITH A MINIMUM 1:100 FALL TOWARDS THE GARAGE VEHICLE ENTRY

B. THE GARAGE SKIRTING IS TO BE A WATER RESISTANT MATERIAL. WHICH MAY INCLUDE NATURAL TIMBER SUCH AS TREATED KILN DRIED PINUS RADIATA (INCLUDING FINGER JOINTED PINE), HARDWOOD AND THE LIKE. THE SKIRTING IS TO BE SEALED TO THE SLAB WITH A MINIMUM 5mm THICK BEAD OF VISIBLE WATERPROOF FLEXIBLE SEALANT.

Sorell Council

Application - 46 Friendship Drive, Sorell - P1.pdf

Plans Reference:P1 ate Received:27/03/2024

IMPORTANT NOTES

- WRITTEN DIMENSIONS TAKE PRECEDENCE OVER DRAWN SCALE. ALL LEVELS. DIMENSIONS AND EXISTING CONDITIONS TO BE CHECKED BY CONTRACTOR AND VERIFIED BEFORE COMMENCEMENT OF WORKS ON SITE, ANY DISCREPANCIES TO BE REPORTED TO THE OFFICE IMMEDIATELY
- WINDOW SIZES ARE NOMINAL ONLY, SIZES MAY CHANGE DUE TO AVAILABILITY.
- AVAILABILITY.
 FLOOR PLANS ARE DIMENSIONED TO TIMBER STUD FRAME.
 ALL WORKS MUST BE EXECUTED IN A WORKMANLIKE MANOR AND MUST CONFORM TO THE LATEST APPLICABLE AUSTRALIAN
- THESE DRAWINGS SHALL NOT BE ALTERED, REPRODUCED, COPIED IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION FROM ACCESS LIVING GROUP.
- ALL DIMENSION ARE NOMINAL AND MUST BE VERIFIED ON SITE.



1/37 Ascot Dr, Huntingfield TAS 7055

P +61 3 6289 6601

Home:	HPS-ABELIA-12.5(05H.02)
Client:	SJM PROPERTY DEVELOPMENTS

Location: 46 FRIENDSHIP DRIVE, SORELL TAS 7172


Drawing: ELEVATIONS - NOTES


Facade: C-BYRON 02-STONE

DRAWING DETAILS 22/03/2024 4:35:15 pm SHEET SIZE SCALE 1:100 JOB 488N

All dimensions

No: D03b A02

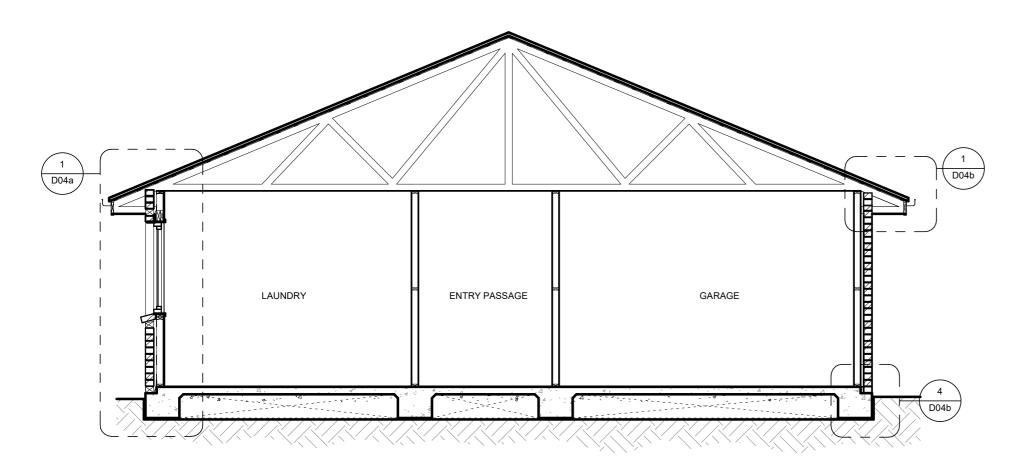

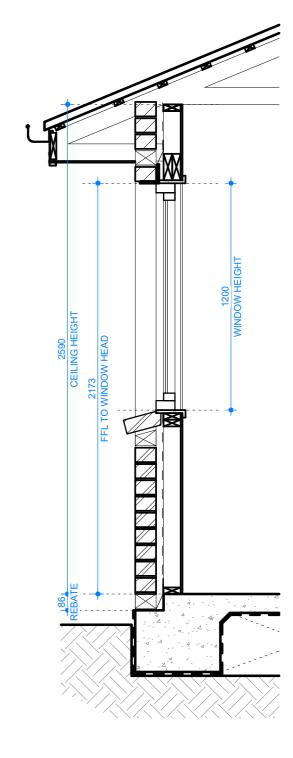





1/37 Ascot Dr, Huntingfield TAS 7055

P +61 3 6289 6601

property developments


IMPORTANT NOTES:

- WRITTEN DIMENSIONS TAKE PRECEDENCE OVER DRAWN SCALE.
 ALL LEVELS, DIMENSIONS AND EXISTING CONDITIONS TO BE
 CHECKED BY CONTRACTOR AND VERIFIED BEFORE
 COMMENCEMENT OF WORKS ON SITE, ANY DISCREPANCIES TO BE
 REPORTED TO THE OFFICE IMMEDIATELY.
 WINDOW SIZES ARE NOMINAL ONLY, SIZES MAY CHANGE DUE TO
 AVAILABILITY.


- AVAILABILITY.
 FLOOR PLANS ARE DIMENSIONED TO TIMBER STUD FRAME.
 ALL WORKS MUST BE EXECUTED IN A WORKMANLIKE MANOR AND
 MUST CONFORM TO THE LATEST APPLICABLE AUSTRALIAN
 STANDARDS.
 THESE DRAWINGS SHALL NOT BE ALTERED, REPRODUCED, COPIED
 IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION FROM
 ACCESS LIVING GROUP.
 ALL DIMENSION ARE NOMINAL AND MUST BE VERIFIED ON SITE.





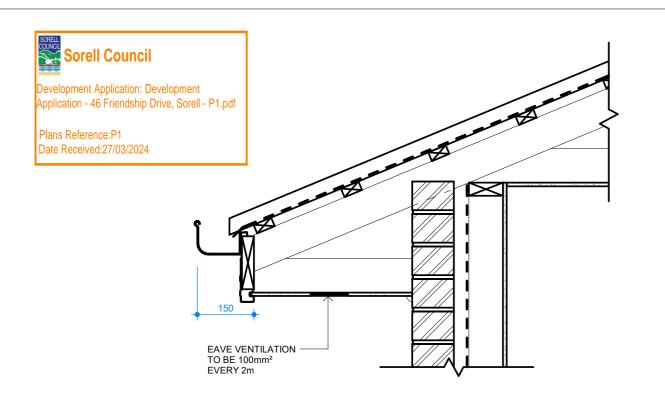



TYP. GUTTER DETAIL -TOP OF WALL

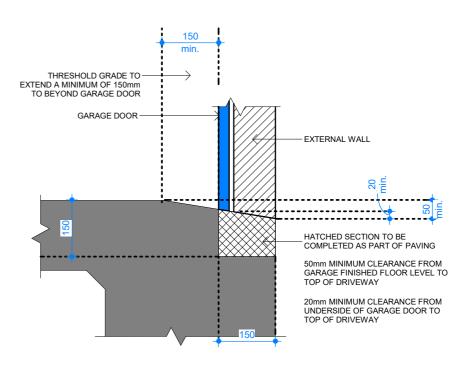

GARAGE GRADED THRESHOLD DETAIL

TIMBER FRAME INTERNAL WALL VAPOUR PERMEABLE **BULK INSULATION** VAPOUR PERMEABLE MEMBRANE 10mm PLASTERBOARD 20mm CAVITY BATTEN SKIRTING CONCRETE 6mm SHEET HARDIE CLADDING FINISHED SURFACE FALL SFF ENGINEER'S DRAWINGS VAPOUR BARRIER **FOOTING DETAILS**

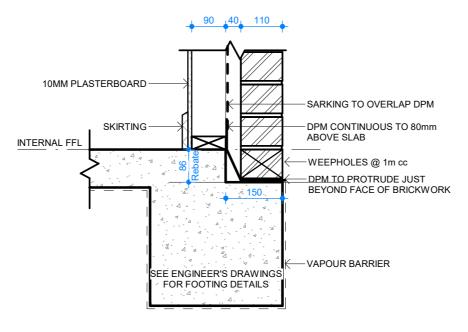

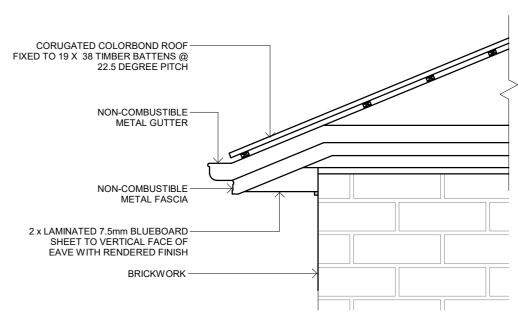

TYP. SLAB REBATE DETAIL

TYP. SLAB REBATE DETAIL

EAVES DETAIL 1.0M


IMPORTANT NOTES:

- WRITTEN DIMENSIONS TAKE PRECEDENCE OVER DRAWN SCALE. ALL LEVELS, DIMENSIONS AND EXISTING CONDITIONS TO BE CHECKED BY CONTRACTOR AND VERIFIED BEFORE COMMENCEMENT OF WORKS ON SITE, ANY DISCREPANCIES TO BE REPORTED TO THE OFFICE IMMEDIATELY.
- WINDOW SIZES ARE NOMINAL ONLY, SIZES MAY CHANGE DUE TO AVAILABILITY.
- AVAILABILITY.
 FLOOR PLANS ARE DIMENSIONED TO TIMBER STUD FRAME.
 ALL WORKS MUST BE EXECUTED IN A WORKMANLIKE MANOR AND
 MUST CONFORM TO THE LATEST APPLICABLE AUSTRALIAN
- THESE DRAWINGS SHALL NOT BE ALTERED, REPRODUCED, COPIED IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION FROM ACCESS LIVING GROUP.
- ALL DIMENSION ARE NOMINAL AND MUST BE VERIFIED ON SITE




1/37 Ascot Dr, Huntingfield TAS 7055 P +61 3 6289 6601

DRAWING DETAILS HPS-ABELIA-12.5(05H.02) Facade: C-BYRON 22/03/2024 4:35:16 pm 02-STONE SHEET SIZE Client: SJM PROPERTY DEVELOPMENTS 488N Location: 46 FRIENDSHIP DRIVE, SORELL TAS 7172 Drawing: SECTIONS - TYPICAL All dimensions to be verified A02

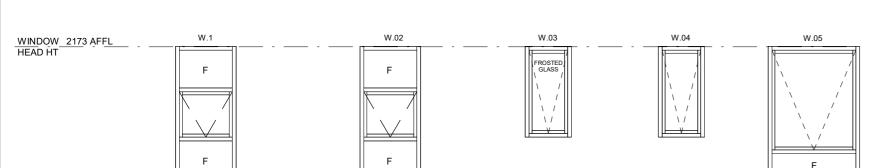


WINDOW SCHEDULE				
WINDOW NO.	DESCRIPTION	HEIGHT	WIDTH	HEAD HEIGH
W.01	1 Panel Wide Awning Window - 1 Opening Sash, Fixed Top & Bottom Panel	1800	800	2173
W.02	1 Panel Wide Awning Window - 1 Opening Sash, Fixed Top & Bottom Panel	1800	800	2173
W.03	1 Panel Wide Awning Window - 1 Opening Sash Only	1200	610	2173
W.04	1 Panel Wide Awning Window - 1 Opening Sash Only	1200	610	2173
W.05	1 Panel Wide Awning Window - 1 Opening Sash, 1 Fixed Bottom Panel	1800	1210	2173
W.06	1 Panel Wide Awning Window - 1 Opening Sash, 1 Fixed Bottom Panel	1800	1210	2173
W.07	1 Panel Wide Awning Window - 1 Opening Sash, 1 Fixed Bottom Panel	1800	850	2173
W.08	1 Panel Wide Awning Window - 1 Opening Sash, 1 Fixed Bottom Panel	1800	1210	2173
W.09	1 Panel Wide Awning Window - 1 Opening Sash Only	1200	610	2173
W.10	1 Panel Wide Awning Window - 1 Opening Sash, 1 Fixed Bottom Panel	1800	1210	2173

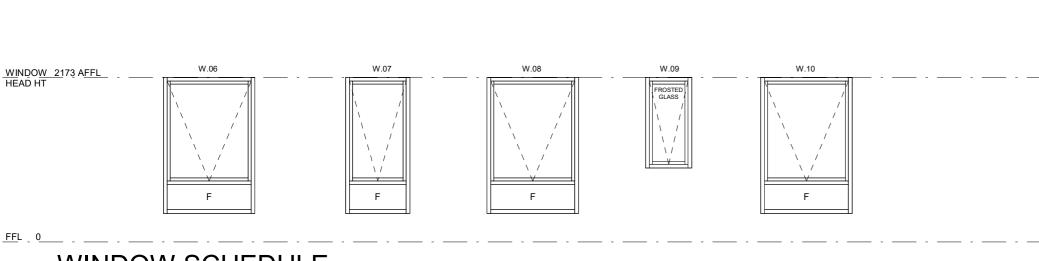



	DOOR SCHEDULE					
DOOR NO.	DOOR TYPE	DESCRIPTION	WIDTH	HEIGHT		
D.01	DT1	Single Swing Solid-Core Door	1020	2040		
D.02	DT1	Single Swing Solid-Core Door	1020	2040		
D.03	DT3	2 Panel Robe Sliding Door	950	2040		
D.04	DT3	2 Panel Robe Sliding Door	950	2040		
D.05	DT1	Single Swing Solid-Core Door 1020 20		2040		
D.06	DT1	Single Swing Solid-Core Door 1020 204		2040		
D.07	DT1	Single Swing Solid-Core Door	1020	2040		
D.08	DT4	4 Panel Robe Sliding Door	3060	2040		
D.09	DT1	Single Swing Solid-Core Door	1020	2040		
D.10	DT3	2 Panel Robe Sliding Door	1854	2140		
D.11	DT3	2 Panel Robe Sliding Door	1854	2140		
D.12	DT1	Single Swing Solid-Core Door	1020	2040		
D.13	DT2	Glazed Aluminium Sliding Door - 1 Fixed Panel	2450	2110		

WINDOW SCHEDULE




SOLID CORE TIMBER SINGLE SWING DOOR






DT2 GLAZED ALUMINIUM SLIDING DOOR (FOR ORIENTATION REFER TO BUILDING **ELEVATIONS)**



DT3 2 PANEL ROBE/LINEN SLIDING DOOR

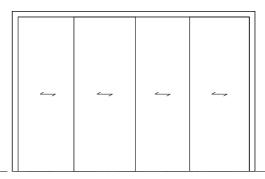

4 PANEL ROBE/LINEN SLIDING DOOR

Sorell Council

DOOR TYPE ELEVATION

IMPORTANT NOTES:

- WRITTEN DIMENSIONS TAKE PRECEDENCE OVER DRAWN SCALE. ALL LEVELS, DIMENSIONS AND EXISTING CONDITIONS TO BE CHECKED BY CONTRACTOR AND VERIFIED BEFORE
 COMMENCEMENT OF WORKS ON SITE, ANY DISCREPANCIES TO BE
 REPORTED TO THE OFFICE IMMEDIATELY.
 WINDOW SIZES ARE NOMINAL ONLY, SIZES MAY CHANGE DUE TO
- AVAILABILITY.
- AVAILABILITY.
 FLOOR PLANS ARE DIMENSIONED TO TIMBER STUD FRAME.
 ALL WORKS MUST BE EXECUTED IN A WORKMANLIKE MANOR AND
 MUST CONFORM TO THE LATEST APPLICABLE AUSTRALIAN
- STANDARDS.
 THESE DRAWINGS SHALL NOT BE ALTERED, REPRODUCED, COPIED IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION FROM ACCESS LIVING GROUP.
- ALL DIMENSION ARE NOMINAL AND MUST BE VERIFIED ON SITE.



1/37 Ascot Dr, Huntingfield TAS 7055

ate Received:27/03/2024

plication - 46 Friendship Drive, Sorell - P1.pdf

P +61 3 6289 6601

IDENTIFICATION

STRIP 75mm WIDE

HPS-ABELIA-12.5(05H.02) Client: SJM PROPERTY DEVELOPMENTS

Location: 46 FRIENDSHIP DRIVE, SORELL TAS 7172

Drawing: WINDOW & DOOR SCHEDULE

Facade: C-BYRON

02-STONE


NOTE:

1. SOLID IDENTIFICATION STRIP 75mm WIDE REQUIRED TO GLAZING BETWEEN 900mm TO 1000mm FFL FOR PREVENTION OF ACCIDENTAL MOVEMENT.

2. WINDOW AND DOOR GLAZING SPECIFICATIONS:

- ESSENTIAL 52mm AWNING WINDOW (CLEAR DOUBLE GLAZED) – U-VALUE=4.1 SHGC=0.57
- SIGNATURE 100mm SLIDING DOOR (CLEAR DOUBLE GLAZED) – U-VALUE=3.6 SHGC=0.66

DRAWING DETAILS 22/03/2024 4:35:17 pm SHEET SIZE As indicated 488N All dimensions to be verified A02

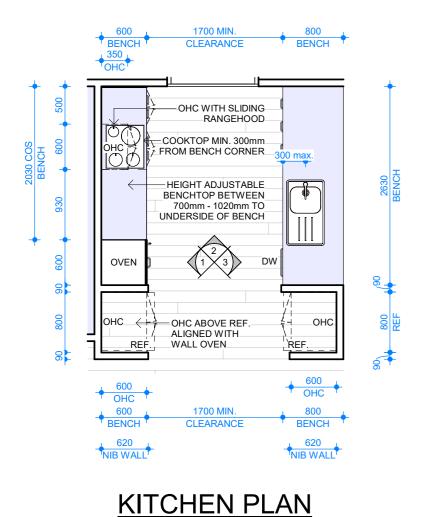

D PULL HANDLE:


D PULL CUPBOARD HANDLES TO ALL CUPBOARDS UNLESS NOTED

PUSH TO RELEASE MECHANISMS FOR BOTH OVERHEAD AND UNDER BENCH CUPBOARDS

C.O.S. DIMENSION:

ALL DIMENSION ARE NOMINAL AND MUST BE VERIFIED ON SITE

BENCHTOP: 35mm POSTFORM LAMINATE BENCHTOPS THROUGHOUT (INCLUDING LAUNDRY)

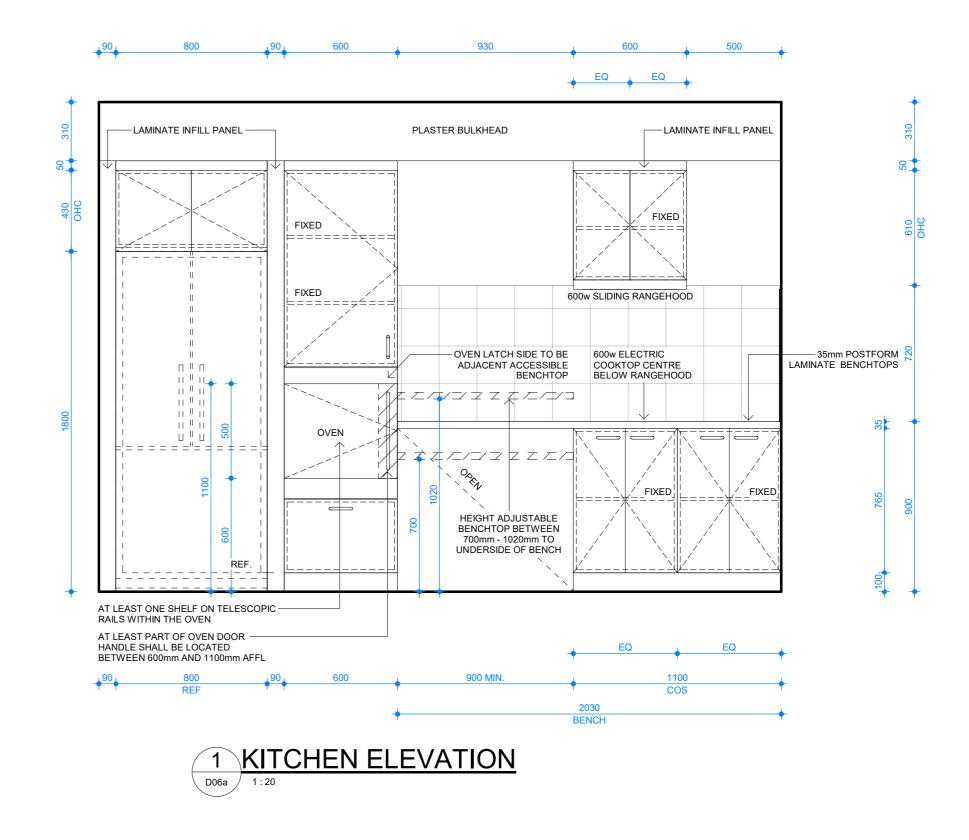

IMPORTANT NOTES


- WRITTEN DIMENSIONS TAKE PRECEDENCE OVER DRAWN SCALE. ALL LEVELS, DIMENSIONS AND EXISTING CONDITIONS TO BE CHECKED BY CONTRACTOR AND VERIFIED BEFORE COMMENCEMENT OF WORKS ON SITE, ANY DISCREPANCIES TO BE REPORTED TO THE OFFICE IMMEDIATELY.
- WINDOW SIZES ARE NOMINAL ONLY, SIZES MAY CHANGE DUE TO AVAILABILITY.
- AVAILABILITY.
 FLOOR PLANS ARE DIMENSIONED TO TIMBER STUD FRAME.
 ALL WORKS MUST BE EXECUTED IN A WORKMANLIKE MANOR AND
 MUST CONFORM TO THE LATEST APPLICABLE AUSTRALIAN
 STANDARDS.
- THESE DRAWINGS SHALL NOT BE ALTERED, REPRODUCED, COPIED IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION FROM ACCESS LIVING GROUP.
- ALL DIMENSION ARE NOMINAL AND MUST BE VERIFIED ON SITE.



HPS-ABELIA-12.5(05H.02) Client: SJM PROPERTY DEVELOPMENTS

Location: 46 FRIENDSHIP DRIVE, SORELL TAS 7172 Drawing: INTERNAL ELEVATIONS - KITCHEN

DRAWING DETAILS Facade: C-BYRON 22/03/2024 4:35:17 pm SHEET SIZE 02-STONE As indicated 488N

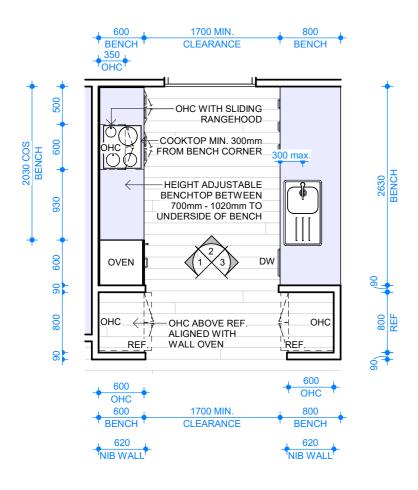

KITCHEN PLAN

D PULL HANDLE:

D PULL CUPBOARD HANDLES TO ALL CUPBOARDS UNLESS NOTED OTHERWISE


PUSH TO RELEASE MECHANISMS FOR BOTH OVERHEAD AND UNDER BENCH CUPBOARDS

C.O.S. DIMENSION:

ALL DIMENSION ARE NOMINAL AND MUST BE VERIFIED ON SITE

BENCHTOP: 35mm POSTFORM LAMINATE BENCHTOPS THROUGHOUT (INCLUDING LAUNDRY)



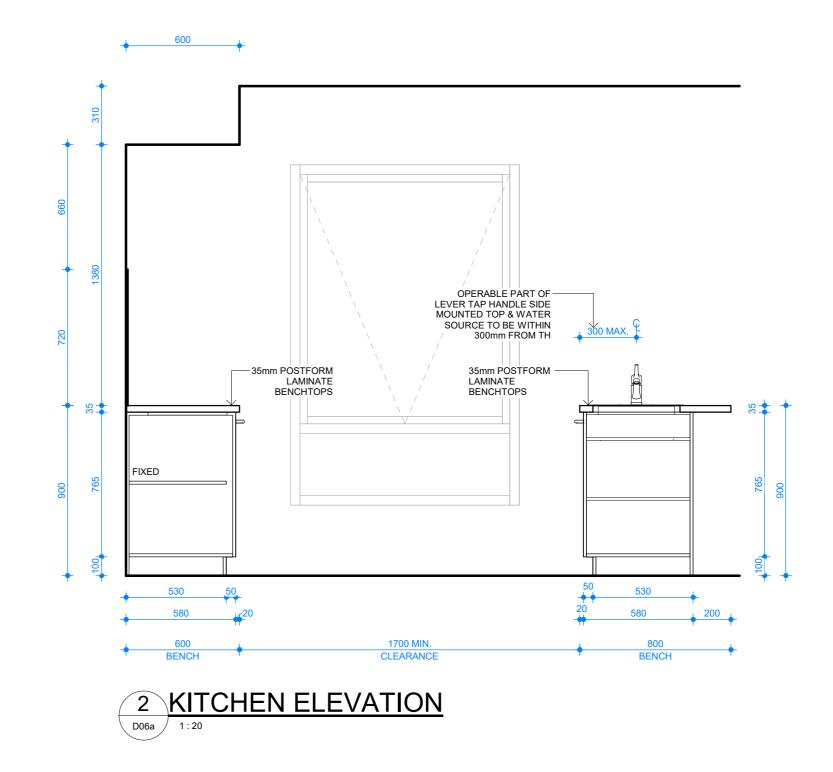

IMPORTANT NOTES:


- WRITTEN DIMENSIONS TAKE PRECEDENCE OVER DRAWN SCALE. ALL LEVELS, DIMENSIONS AND EXISTING CONDITIONS TO BE CHECKED BY CONTRACTOR AND VERIFIED BEFORE
 COMMENCEMENT OF WORKS ON SITE, ANY DISCREPANCIES TO BE
 REPORTED TO THE OFFICE IMMEDIATELY.
- WINDOW SIZES ARE NOMINAL ONLY, SIZES MAY CHANGE DUE TO AVAILABILITY.
- AVAILABILITY.
 FLOOR PLANS ARE DIMENSIONED TO TIMBER STUD FRAME.
 ALL WORKS MUST BE EXECUTED IN A WORKMANLIKE MANOR AND
 MUST CONFORM TO THE LATEST APPLICABLE AUSTRALIAN
 STANDARDS.
 THESE DRAWINGS SHALL NOT BE ALTERED, REPRODUCED, COPIED
- IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION FROM ACCESS LIVING GROUP.
- ALL DIMENSION ARE NOMINAL AND MUST BE VERIFIED ON SITE.



1/37 Ascot Dr, Huntingfield TAS 7055

P +61 3 6289 6601

	LDC VDELIV 13 2(U2F) U3)	Facade: C-BYRON		DRAWING DE	TAILS
Home:	HPS-ABELIA-12.5(05H.02)	Facade: O-D I NOIN		22/03/2024 4:35:	18 pm
O!: t-	SJM PROPERTY DEVELOPMENTS	02-STONE		SCALE	SHEET SIZE
Client:	SJINI PROPERTIT DEVELOPINIENTS	UZ-OTOINE		As indicated	A3
Location	1:46 FRIENDSHIP DRIVE, SORELL TAS 7172			JOB No: 488	N
Drawing	: INTERNAL ELEVATIONS - KITCHI	EN	All dimensions to be verified	Drwg D06b Issue	A02

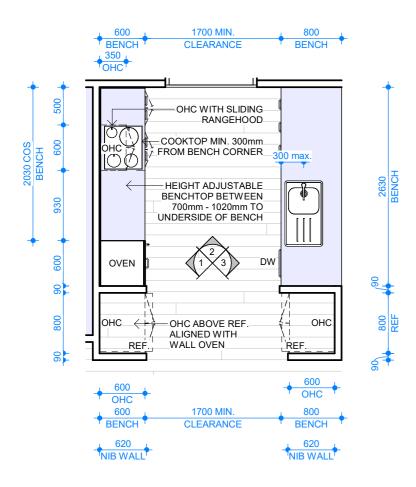

KITCHEN PLAN

D PULL HANDLE: D PULL CUPBOARD HANDLES TO

ALL CUPBOARDS UNLESS NOTED OTHERWISE

PUSH TO RELEASE MECHANISMS FOR BOTH OVERHEAD AND UNDER BENCH CUPBOARDS

C.O.S. DIMENSION:

ALL DIMENSION ARE NOMINAL AND MUST BE VERIFIED ON SITE

35mm POSTFORM LAMINATE BENCHTOPS THROUGHOUT (INCLUDING LAUNDRY)

IMPORTANT NOTES:


- WRITTEN DIMENSIONS TAKE PRECEDENCE OVER DRAWN SCALE. ALL LEVELS, DIMENSIONS AND EXISTING CONDITIONS TO BE CHECKED BY CONTRACTOR AND VERIFIED BEFORE COMMENCEMENT OF WORKS ON SITE, ANY DISCREPANCIES TO BE REPORTED TO THE OFFICE IMMEDIATELY.
- WINDOW SIZES ARE NOMINAL ONLY, SIZES MAY CHANGE DUE TO AVAILABILITY.
- AVAILABILITY.
 FLOOR PLANS ARE DIMENSIONED TO TIMBER STUD FRAME.
 ALL WORKS MUST BE EXECUTED IN A WORKMANLIKE MANOR AND
 MUST CONFORM TO THE LATEST APPLICABLE AUSTRALIAN
- THESE DRAWINGS SHALL NOT BE ALTERED, REPRODUCED, COPIED IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION FROM ACCESS LIVING GROUP.
- ALL DIMENSION ARE NOMINAL AND MUST BE VERIFIED ON SITE.



elopment Application: Development pplication - 46 Friendship Drive, Sorell - P1.pdf

Plans Reference:P1 Date Received:27/03/2024



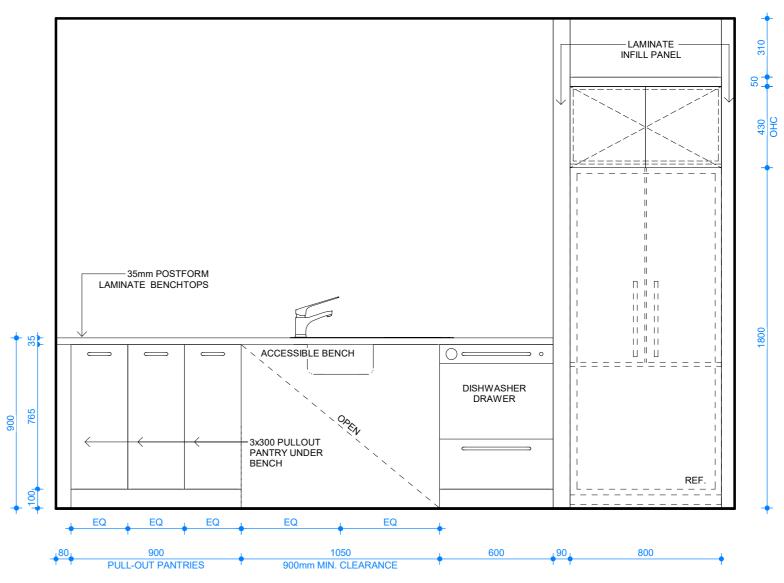





1/37 Ascot Dr, Huntingfield TAS 7055 P +61 3 6289 6601

HPS-ABELIA-12.5(05H.02) Client: SJM PROPERTY DEVELOPMENTS

Location: 46 FRIENDSHIP DRIVE, SORELL TAS 7172


Facade: C-BYRON 02-STONE


DRAWING DETAILS 22/03/2024 4:35:19 pm SHEET SIZE As indicated 488N


A02

Drawing: INTERNAL ELEVATIONS - KITCHEN

No: D06c All dimensions to be verified

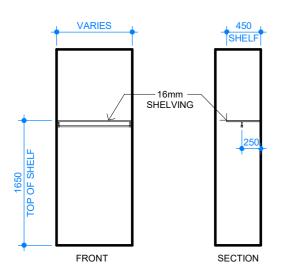

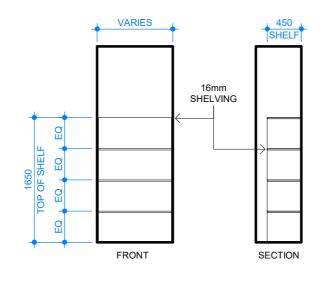



TYPICAL ROBE

TYPICAL LINEN

TYPICAL DOOR HARDWARE

D PULL HANDLE:

D PULL CUPBOARD HANDLES TO ALL CUPBOARDS UNLESS NOTED

PUSH TO RELEASE MECHANISMS FOR BOTH OVERHEAD AND UNDER BENCH CUPBOARDS

C.O.S. DIMENSION:

ALL DIMENSION ARE NOMINAL AND MUST BE VERIFIED ON SITE

BENCHTOP: 35mm POSTFORM LAMINATE BENCHTOPS THROUGHOUT (INCLUDING LAUNDRY)

IMPORTANT NOTES:

- WRITTEN DIMENSIONS TAKE PRECEDENCE OVER DRAWN SCALE. ALL LEVELS, DIMENSIONS AND EXISTING CONDITIONS TO BE CHECKED BY CONTRACTOR AND VERIFIED BEFORE
 COMMENCEMENT OF WORKS ON SITE, ANY DISCREPANCIES TO BE
 REPORTED TO THE OFFICE IMMEDIATELY.
- WINDOW SIZES ARE NOMINAL ONLY, SIZES MAY CHANGE DUE TO AVAILABILITY.
- AVAILABILITY.
 FLOOR PLANS ARE DIMENSIONED TO TIMBER STUD FRAME.
 ALL WORKS MUST BE EXECUTED IN A WORKMANLIKE MANOR AND
 MUST CONFORM TO THE LATEST APPLICABLE AUSTRALIAN
 STANDARDS.
 THESE DRAWINGS SHALL NOT BE ALTERED, REPRODUCED, COPIED
- IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION FROM ACCESS LIVING GROUP.
- ALL DIMENSION ARE NOMINAL AND MUST BE VERIFIED ON SITE.






1/37 Ascot Dr, Huntingfield TAS 7055 P +61 3 6289 6601

HPS-ABELIA-12.5(05H.02) Client: SJM PROPERTY DEVELOPMENTS

Location: 46 FRIENDSHIP DRIVE, SORELL TAS 7172

Drawing: INTERNAL ELEVATIONS - TYPICAL

DRAWING DETAILS Facade: C-BYRON 22/03/2024 4:35:19 pm 02-STONE SHEET SIZE As indicated 488N All dimensions to be verified on site A02

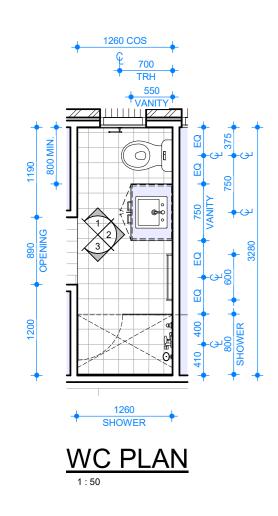




D PULL CUPBOARD HANDLES TO ALL CUPBOARDS UNLESS NOTED

PUSH TO RELEASE MECHANISMS FOR BOTH OVERHEAD AND UNDER BENCH CUPBOARDS

C.O.S. DIMENSION:


ALL DIMENSION ARE NOMINAL AND MUST BE VERIFIED ON SITE

BENCHTOP: 35mm POSTFORM LAMINATE BENCHTOPS THROUGHOUT (INCLUDING LAUNDRY)

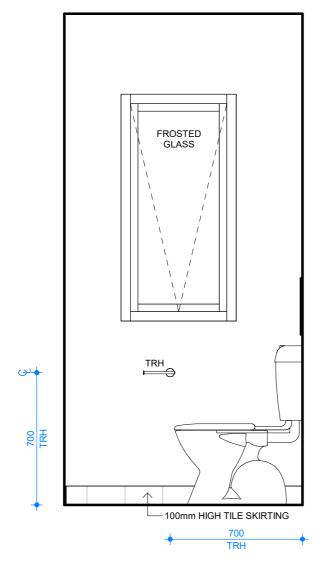





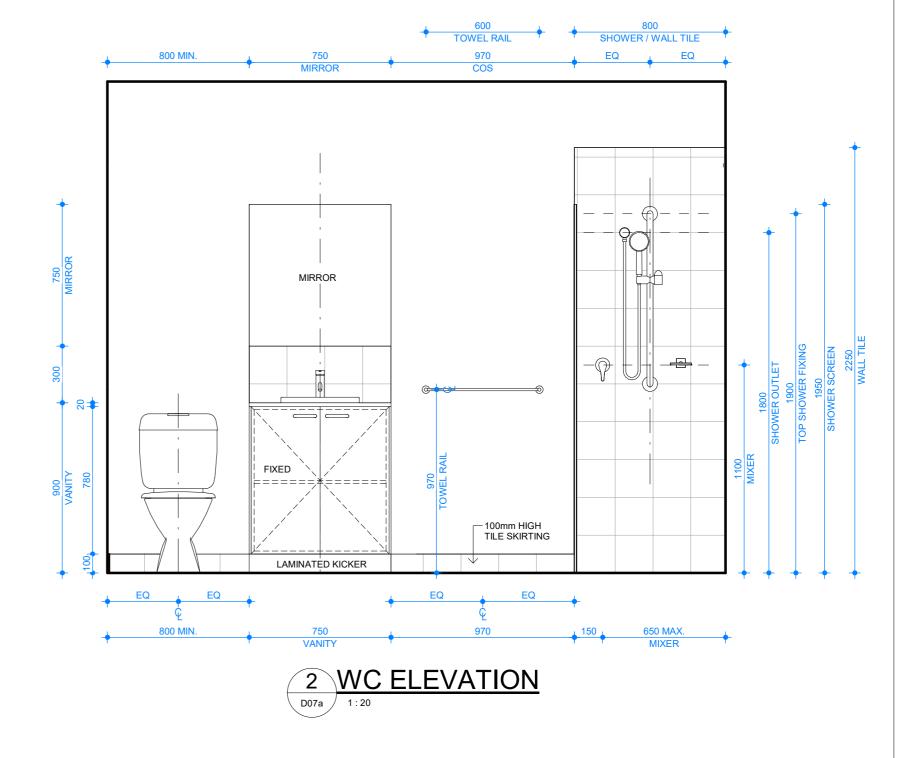

IMPORTANT NOTES:

- WRITTEN DIMENSIONS TAKE PRECEDENCE OVER DRAWN SCALE. ALL LEVELS, DIMENSIONS AND EXISTING CONDITIONS TO BE ALL LEVELS, DIMENSIONS AND EXISTING CONDITIONS TO BE CHECKED BY CONTRACTOR AND VERIFIED BEFORE COMMENCEMENT OF WORKS ON SITE, ANY DISCREPANCIES TO BE REPORTED TO THE OFFICE IMMEDIATELY. WINDOW SIZES ARE NOMINAL ONLY, SIZES MAY CHANGE DUE TO AVAILABILITY.

- AVAILABILITY.
 FLOOR PLANS ARE DIMENSIONED TO TIMBER STUD FRAME.
 ALL WORKS MUST BE EXECUTED IN A WORKMANLIKE MANOR AND
 MUST CONFORM TO THE LATEST APPLICABLE AUSTRALIAN
- STANDARDS.
 THESE DRAWINGS SHALL NOT BE ALTERED, REPRODUCED, COPIED IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION FROM ACCESS LIVING GROUP.
- ALL DIMENSION ARE NOMINAL AND MUST BE VERIFIED ON SITE.




1/37 Ascot Dr, Huntingfield TAS 7055

P +61 3 6289 6601

DRAWING DETAILS HPS-ABELIA-12.5(05H.02) Facade: C-BYRON 22/03/2024 4:35:19 pm 02-STONE As indicated 488N Location: 46 FRIENDSHIP DRIVE, SORELL TAS 7172 No: D07a Drawing: WET AREA ELEVATIONS - WC A02

Client: SJM PROPERTY DEVELOPMENTS

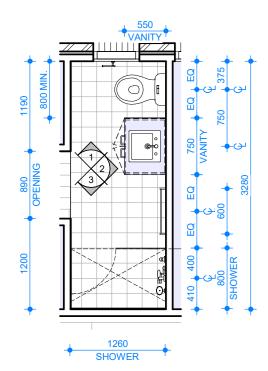



D PULL HANDLE:
D PULL CUPBOARD HANDLES TO
ALL CUPBOARDS UNLESS NOTED

PUSH TO RELEASE MECHANISMS FOR BOTH OVERHEAD AND UNDER BENCH CUPBOARDS


C.O.S. DIMENSION: ALL DIMENSION ARE NOMINAL AND MUST BE VERIFIED ON SITE

BENCHTOP: 35mm POSTFORM LAMINATE BENCHTOPS THROUGHOUT (INCLUDING LAUNDRY)

IMPORTANT NOTES:

- WRITTEN DIMENSIONS TAKE PRECEDENCE OVER DRAWN SCALE. ALL LEVELS, DIMENSIONS AND EXISTING CONDITIONS TO BE ALL LEVELS, DIMENSIONS AND EXISTING CONDITIONS TO BE CHECKED BY CONTRACTOR AND VERIFIED BEFORE COMMENCEMENT OF WORKS ON SITE, ANY DISCREPANCIES TO BE REPORTED TO THE OFFICE IMMEDIATELY. WINDOW SIZES ARE NOMINAL ONLY, SIZES MAY CHANGE DUE TO AVAILABILITY.

- AVAILABILITY.
 FLOOR PLANS ARE DIMENSIONED TO TIMBER STUD FRAME.
 ALL WORKS MUST BE EXECUTED IN A WORKMANLIKE MANOR AND
 MUST CONFORM TO THE LATEST APPLICABLE AUSTRALIAN
 STANDARDS.
 THESE DRAWINGS SHALL NOT BE ALTERED, REPRODUCED, COPIED
 WINDLEST OR INVALIGATE MUTUOLIT THE WORTEN DEPMISSION EPOM.
- IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION FROM ACCESS LIVING GROUP.
- ALL DIMENSION ARE NOMINAL AND MUST BE VERIFIED ON SITE.

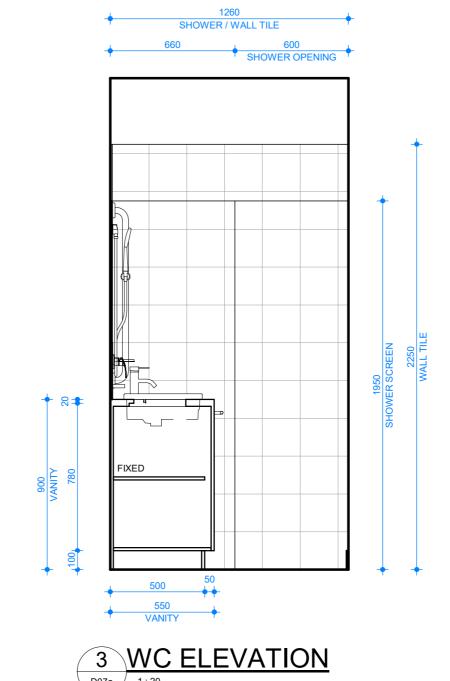





1/37 Ascot Dr, Huntingfield TAS 7055

P +61 3 6289 6601


HPS-ABELIA-12.5(05H.02) Client: SJM PROPERTY DEVELOPMENTS

Facade: C-BYRON 02-STONE

DRAWING DETAILS 22/03/2024 4:35:20 pm SHEET SIZE As indicated 488N

Drawing: WET AREA ELEVATIONS - WC

Location: 46 FRIENDSHIP DRIVE, SORELL TAS 7172

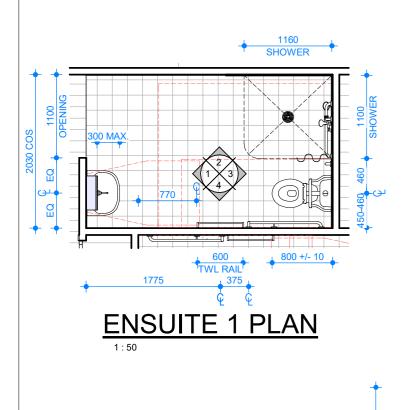

D PULL HANDLE:

D PULL CUPBOARD HANDLES TO ALL CUPBOARDS UNLESS NOTED OTHERWISE

PUSH TO RELEASE MECHANISMS FOR BOTH OVERHEAD AND UNDER BENCH CUPBOARDS

C.O.S. DIMENSION:

ALL DIMENSION ARE NOMINAL AND MUST BE VERIFIED ON SITE


BENCHTOP: 35mm POSTFORM LAMINATE BENCHTOPS THROUGHOUT (INCLUDING LAUNDRY)

IMPORTANT NOTES:

- WRITTEN DIMENSIONS TAKE PRECEDENCE OVER DRAWN SCALE. ALL LEVELS, DIMENSIONS AND EXISTING CONDITIONS TO BE ALL LEVELS, DIMENSIONS AND EXISTING CONDITIONS TO BE CHECKED BY CONTRACTOR AND VERIFIED BEFORE COMMENCEMENT OF WORKS ON SITE, ANY DISCREPANCIES TO BE REPORTED TO THE OFFICE IMMEDIATELY. WINDOW SIZES ARE NOMINAL ONLY, SIZES MAY CHANGE DUE TO AVAILABILITY.

- AVAILABILITY.
 FLOOR PLANS ARE DIMENSIONED TO TIMBER STUD FRAME.
 ALL WORKS MUST BE EXECUTED IN A WORKMANLIKE MANOR AND
 MUST CONFORM TO THE LATEST APPLICABLE AUSTRALIAN
 STANDARDS.
 THESE DRAWINGS SHALL NOT BE ALTERED, REPRODUCED, COPIED
- IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION FROM ACCESS LIVING GROUP.
- ALL DIMENSION ARE NOMINAL AND MUST BE VERIFIED ON SITE.



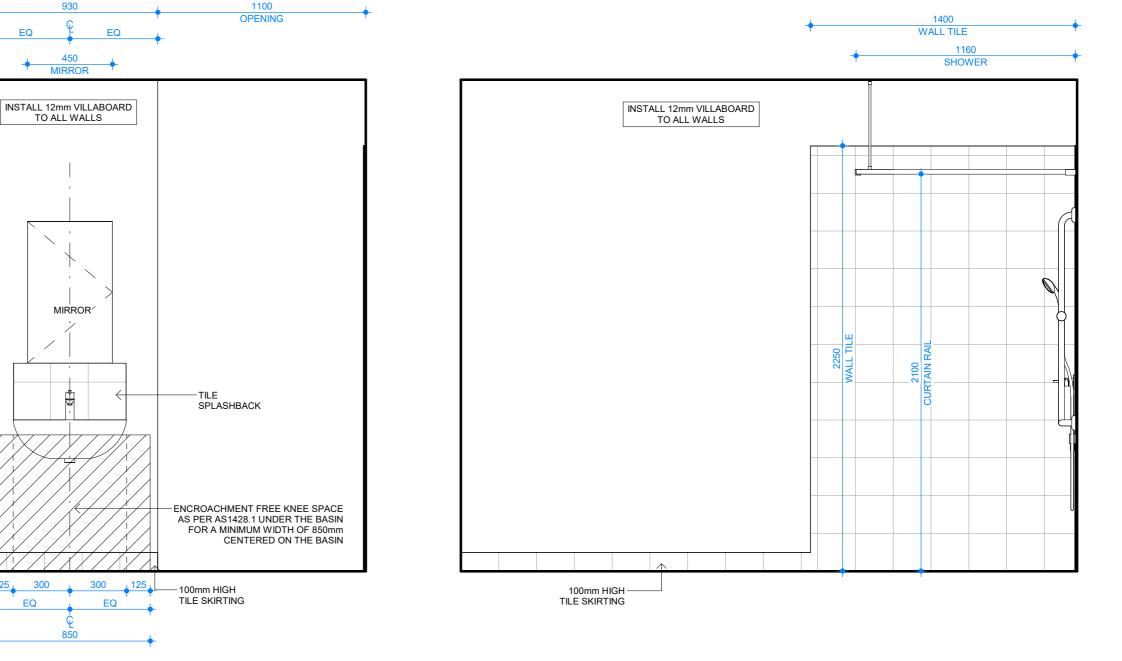

ENSUITE 1 ELEVATION



1/37 Ascot Dr, Huntingfield TAS 7055

ENSUITE 1 ELEVATION


P +61 3 6289 6601

HPS-ABELIA-12.5(05H.02) Client: SJM PROPERTY DEVELOPMENTS

Location: 46 FRIENDSHIP DRIVE, SORELL TAS 7172

Drawing: WET AREA ELEVATIONS - ENSUITE 1

Facade: C-BYRON		DRAWING DI	ETAILS
Facade: C-D I NOIN		22/03/2024 4:3	5:21 pm
02-STONE		SCALE	SHEET SIZE
02-310NL		As indicated	A3
		JOB 4 O C	IAC
		No: 488	SIN
F 1	All dimensions to be verified	Drwg DO70 Issu	e AN
– '	on site	No: DU/C	MUZ

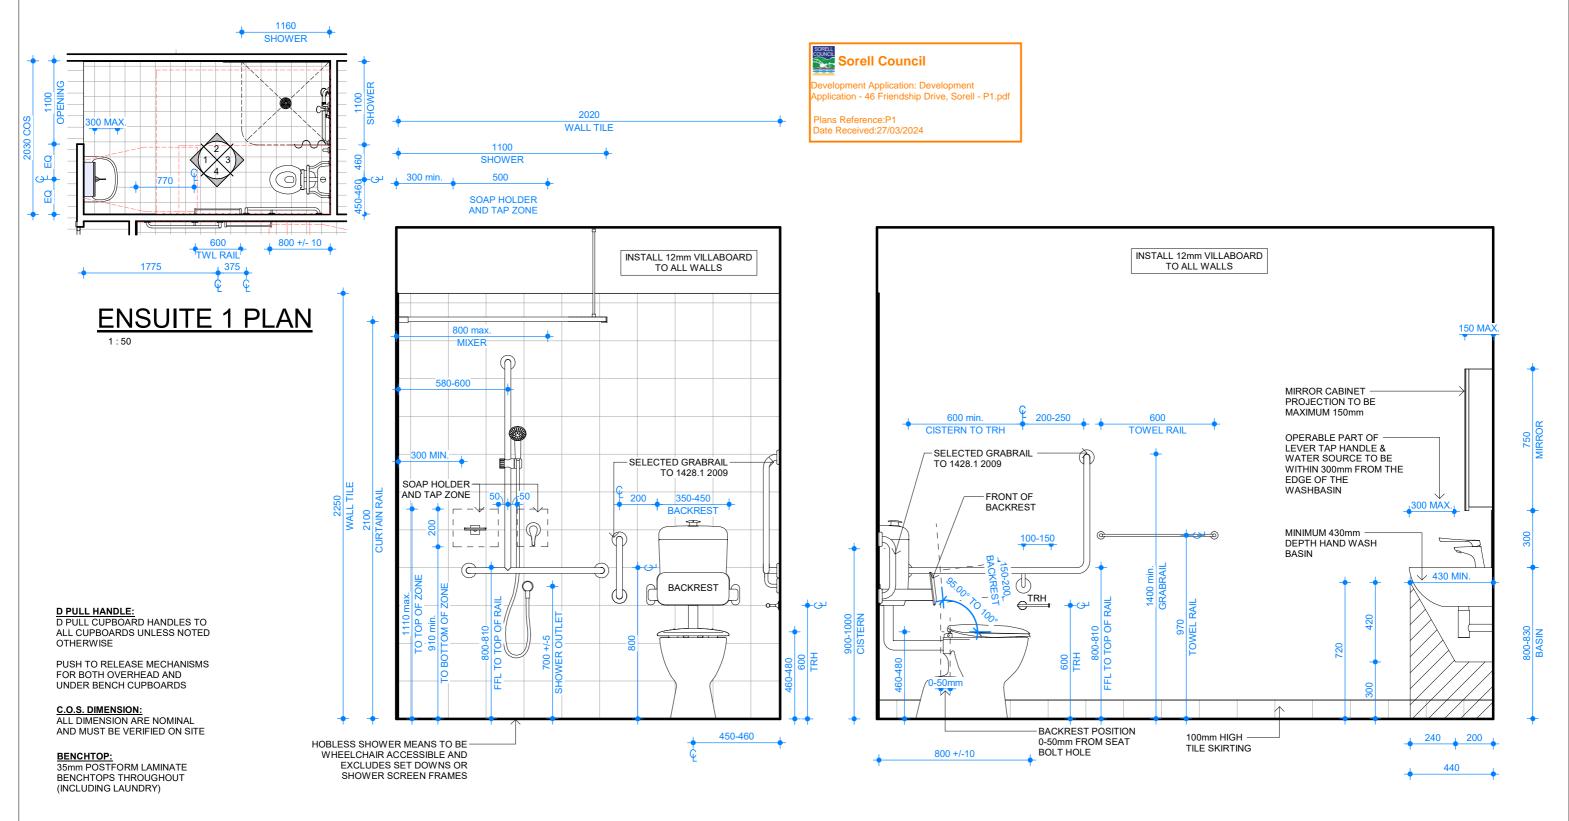

IMPORTANT NOTES:


- WRITTEN DIMENSIONS TAKE PRECEDENCE OVER DRAWN SCALE. ALL LEVELS, DIMENSIONS AND EXISTING CONDITIONS TO BE CHECKED BY CONTRACTOR AND VERIFIED BEFORE COMMENCEMENT OF WORKS ON SITE, ANY DISCREPANCIES TO BE REPORTED TO THE OFFICE IMMEDIATELY.
- WINDOW SIZES ARE NOMINAL ONLY, SIZES MAY CHANGE DUE TO AVAILABILITY.
- AVAILABILITY.
 FLOOR PLANS ARE DIMENSIONED TO TIMBER STUD FRAME.
 ALL WORKS MUST BE EXECUTED IN A WORKMANLIKE MANOR AND
 MUST CONFORM TO THE LATEST APPLICABLE AUSTRALIAN
 STANDARDS.
- THESE DRAWINGS SHALL NOT BE ALTERED, REPRODUCED, COPIED IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION FROM ACCESS LIVING GROUP.
- ALL DIMENSION ARE NOMINAL AND MUST BE VERIFIED ON SITE.




ENSUITE 1 ELEVATION




l	HPS-ABELIA-12.5(05H.02)	Facade: C-BYRON		DRAWING D	ETAILS
Home:	11F3-ADELIA-12.3(0311.02)	Facade: O-D I INOIN		22/03/2024 4:	35:21 pm
Cli a mái	SJM PROPERTY DEVELOPMENTS	02-STONE		SCALE	SHEET SIZE
Client	SJIVI PROPERTY DEVELOPIVIENTS	02-01 ONL		As indicated	A3
Location	^{on:} 46 FRIENDSHIP DRIVE, SORELL TAS 7172			JOB No: 48	8N
Drawir	g: WET AREA ELEVATIONS - EN	ISUITE 1	All dimensions to be verified	No: D07d Iss	A02

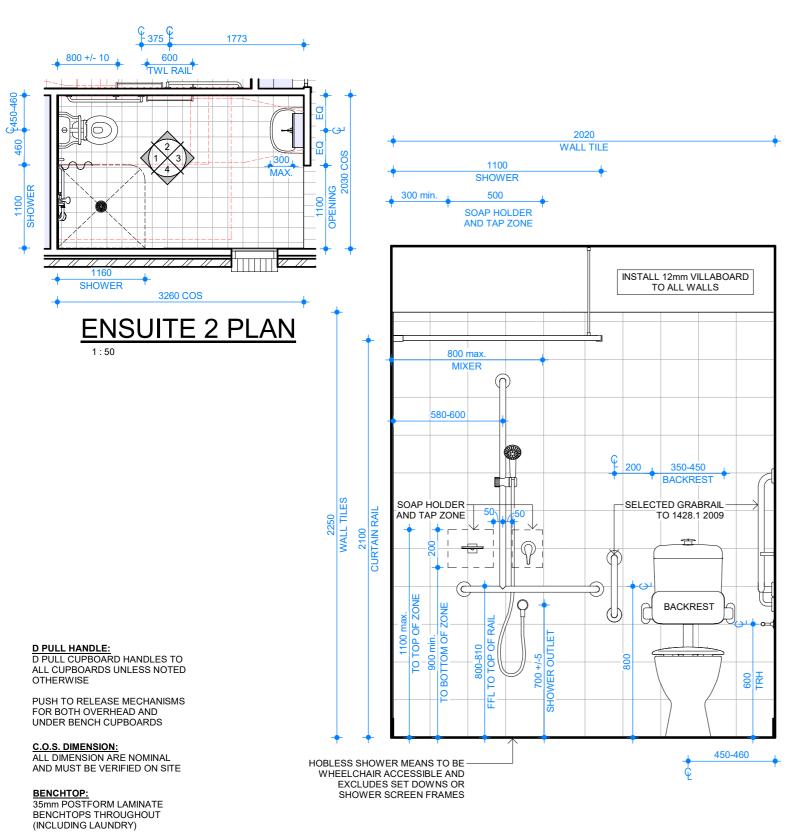

Sorell Council pplication - 46 Friendship Drive, Sorell - P1.pdf Plans Reference:P1 ate Received:27/03/2024

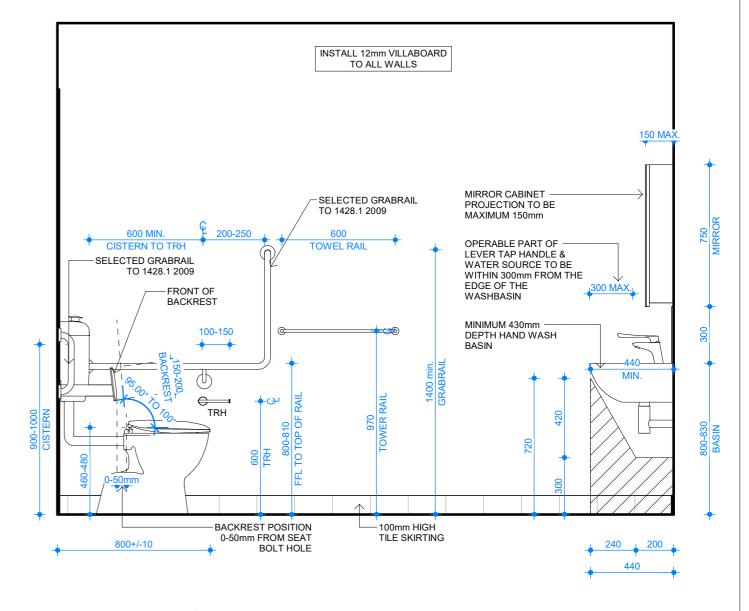



ENSUITE 2 ELEVATION D07e

IMPORTANT NOTES

- WRITTEN DIMENSIONS TAKE PRECEDENCE OVER DRAWN SCALE. ALL LEVELS, DIMENSIONS AND EXISTING CONDITIONS TO BE CHECKED BY CONTRACTOR AND VERIFIED BEFORE COMMENCEMENT OF WORKS ON SITE, ANY DISCREPANCIES TO BE REPORTED TO THE OFFICE IMMEDIATELY.
- WINDOW SIZES ARE NOMINAL ONLY, SIZES MAY CHANGE DUE TO AVAILABILITY.
- AVAILABILITY.
 FLOOR PLANS ARE DIMENSIONED TO TIMBER STUD FRAME.
 ALL WORKS MUST BE EXECUTED IN A WORKMANLIKE MANOR AND
 MUST CONFORM TO THE LATEST APPLICABLE AUSTRALIAN
 STANDARDS.
- THESE DRAWINGS SHALL NOT BE ALTERED, REPRODUCED, COPIED IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION FROM ACCESS LIVING GROUP.
- ALL DIMENSION ARE NOMINAL AND MUST BE VERIFIED ON SITE.



1/37 Ascot Dr, Huntingfield TAS 7055

P +61 3 6289 6601


Home:	HPS-ABELIA-12.5(05H.02)
Client:	SJM PROPERTY DEVELOPMENTS
Location	^{1:} 46 FRIENDSHIP DRIVE, SORELL TAS 7172

Facade: C-BYRON 02-STONE

DRAWING DETAILS 22/03/2024 4:35:22 pm SHEET SIZE As indicated 488N A02

Drawing: WET AREA ELEVATIONS - ENSUITE 2

All dimensions to be verified

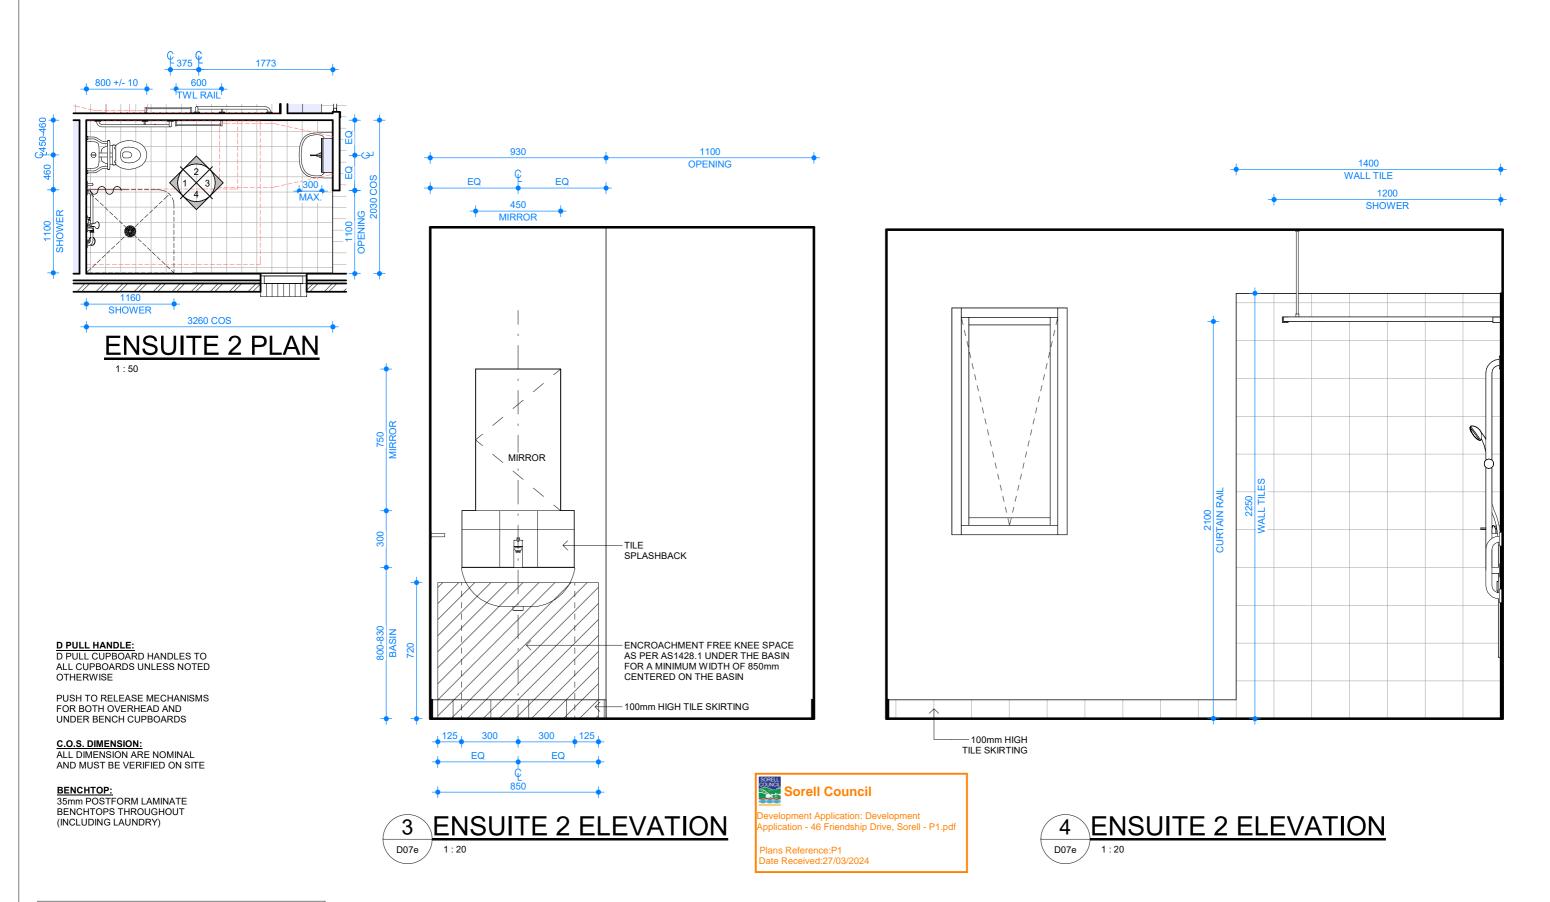

IMPORTANT NOTES:

- WRITTEN DIMENSIONS TAKE PRECEDENCE OVER DRAWN SCALE. ALL LEVELS, DIMENSIONS AND EXISTING CONDITIONS TO BE CHECKED BY CONTRACTOR AND VERIFIED BEFORE
 COMMENCEMENT OF WORKS ON SITE, ANY DISCREPANCIES TO BE
 REPORTED TO THE OFFICE IMMEDIATELY.
- WINDOW SIZES ARE NOMINAL ONLY, SIZES MAY CHANGE DUE TO AVAILABILITY.
- AVAILABILITY.
 FLOOR PLANS ARE DIMENSIONED TO TIMBER STUD FRAME.
 ALL WORKS MUST BE EXECUTED IN A WORKMANLIKE MANOR AND
 MUST CONFORM TO THE LATEST APPLICABLE AUSTRALIAN
 STANDARDS.
- THESE DRAWINGS SHALL NOT BE ALTERED, REPRODUCED, COPIED IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION FROM ACCESS LIVING GROUP.
- ALL DIMENSION ARE NOMINAL AND MUST BE VERIFIED ON SITE.



1/37 Ascot Dr, Huntingfield TAS 7055

P +61 3 6289 6601


HPS-ABELIA-12.5(05H.02) Client: SJM PROPERTY DEVELOPMENTS

Location: 46 FRIENDSHIP DRIVE, SORELL TAS 7172

22/03/2024 4:35:23 pm 02-STONE SHEET SIZE As indicated 488N Drawing: WET AREA ELEVATIONS - ENSUITE 2 All dimensions to be verified on site A02

Facade: C-BYRON

DRAWING DETAILS

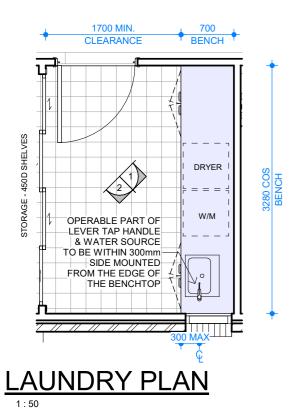

PUSH TO RELEASE MECHANISMS FOR BOTH OVERHEAD AND UNDER BENCH CUPBOARDS


D PULL HANDLE:

D PULL CUPBOARD HANDLES TO ALL CUPBOARDS UNLESS NOTED

C.O.S. DIMENSION: ALL DIMENSION ARE NOMINAL AND MUST BE VERIFIED ON SITE

BENCHTOP: 35mm POSTFORM LAMINATE BENCHTOPS THROUGHOUT (INCLUDING LAUNDRY)

LAUNDRY ELEVATION **Sorell Council** plication - 46 Friendship Drive, Sorell - P1.pdf Plans Reference:P1 Date Received:27/03/2024

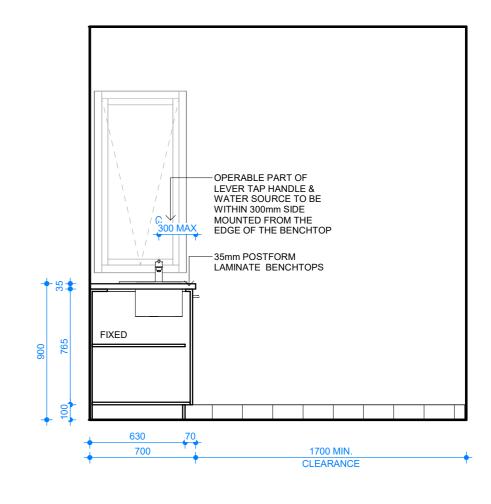



IMPORTANT NOTES:

- WRITTEN DIMENSIONS TAKE PRECEDENCE OVER DRAWN SCALE. ALL LEVELS, DIMENSIONS AND EXISTING CONDITIONS TO BE CHECKED BY CONTRACTOR AND VERIFIED BEFORE COMMENCEMENT OF WORKS ON SITE, ANY DISCREPANCIES TO BE REPORTED TO THE OFFICE IMMEDIATELY.
- WINDOW SIZES ARE NOMINAL ONLY, SIZES MAY CHANGE DUE TO AVAILABILITY.
- AVAILABILITY.
 FLOOR PLANS ARE DIMENSIONED TO TIMBER STUD FRAME.
 ALL WORKS MUST BE EXECUTED IN A WORKMANLIKE MANOR AND
 MUST CONFORM TO THE LATEST APPLICABLE AUSTRALIAN
 STANDARDS.
- THESE DRAWINGS SHALL NOT BE ALTERED, REPRODUCED, COPIED IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION FROM ACCESS LIVING GROUP.
- ALL DIMENSION ARE NOMINAL AND MUST BE VERIFIED ON SITE.



FIXED

1/37 Ascot Dr, Huntingfield TAS 7055

P +61 3 6289 6601

TILE SPLASHBACK

DRYER

-35mm POSTFORM LAMINATE BENCHTOPS

W/M

HPS-ABELIA-12.5(05H.02) Client: SJM PROPERTY DEVELOPMENTS


Location: 46 FRIENDSHIP DRIVE, SORELL TAS 7172

FIXED

AI

DRILL HOLE IN SIDE OF CABNETRY FOR TAPS

DRAWING DETAILS Facade: C-BYRON 22/03/2024 4:35:23 pm 02-STONE 488N Drawing: WET AREA ELEVATIONS - LAUNDRY

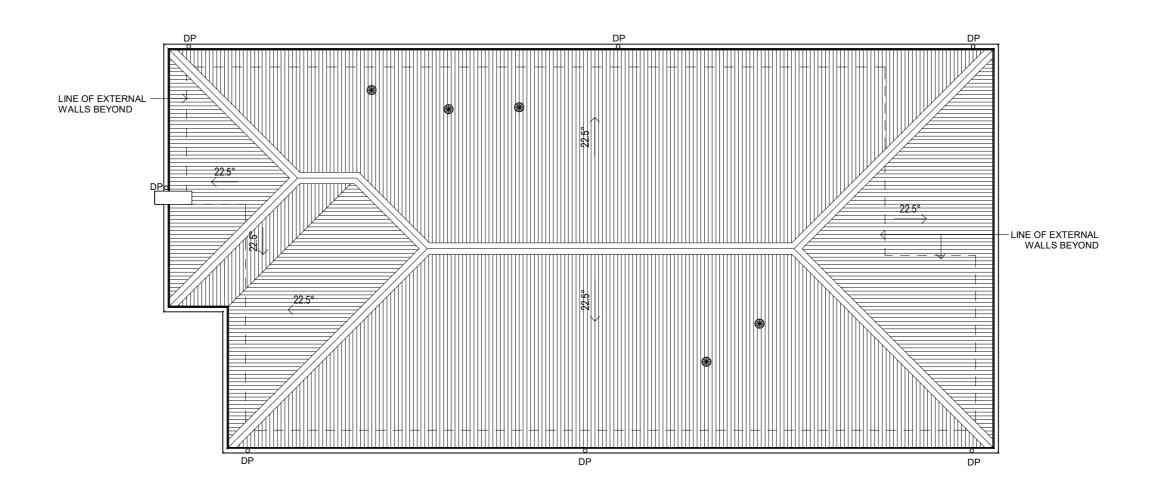

ROOF PLAN



IMPORTANT NOTES:

- WRITTEN DIMENSIONS TAKE PRECEDENCE OVER DRAWN SCALE.
 ALL LEVELS, DIMENSIONS AND EXISTING CONDITIONS TO BE
 CHECKED BY CONTRACTOR AND VERIFIED BEFORE
 COMMENCEMENT OF WORKS ON SITE, ANY DISCREPANCIES TO BE
 REPORTED TO THE OFFICE IMMEDIATELY.
 WINDOW SIZES ARE NOMINAL ONLY, SIZES MAY CHANGE DUE TO
 AVAILABILITY.

- AVAILABILITY.
 FLOOR PLANS ARE DIMENSIONED TO TIMBER STUD FRAME.
 ALL WORKS MUST BE EXECUTED IN A WORKMANLIKE MANOR AND
 MUST CONFORM TO THE LATEST APPLICABLE AUSTRALIAN
 STANDARDS.
 THESE DRAWINGS SHALL NOT BE ALTERED, REPRODUCED, COPIED
 IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION FROM
 ACCESS LIVING GROUP.
 ALL DIMENSION ARE NOMINAL AND MUST BE VERIFIED ON SITE.



1/37 Ascot Dr, Huntingfield TAS 7055 P +61 3 6289 6601

HPS-ABELIA-12.5(05H.02) Client: SJM PROPERTY DEVELOPMENTS Location: 46 FRIENDSHIP DRIVE, SORELL TAS 7172 Facade: C-BYRON 02-STONE


Approx JOB All dimensions to be verified on site

DRAWING DETAILS 22/03/2024 4:35:24 pm SHEET SIZE 488N

Drawing: ROOF PLAN

SLAB PLAN NOTE: REFER TO DRAWING D09 FOR SLAB PENETRATIONS. REFER TO STRUCTURAL ENGINEER'S PLANS FOR CONCRETE SLAB CONSTRUCTION. SLAB TO BE DESIGNED BASED ON SOIL CLASSIFICATION AS PER AS2870 SHOWER RECESS: SHOWER BASES TO BE RECESSED 50mm IN TO SLAB



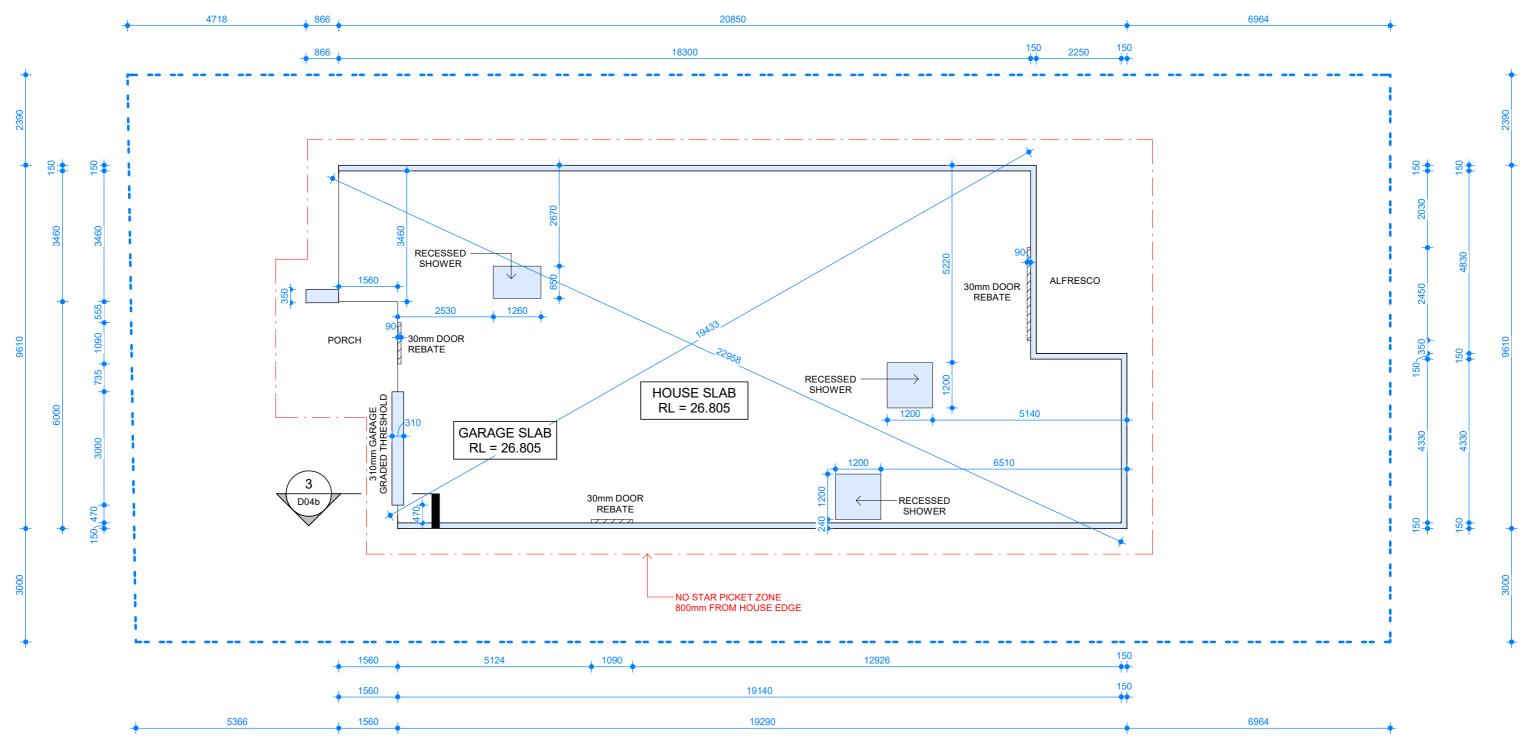

IMPORTANT NOTES:

- WRITTEN DIMENSIONS TAKE PRECEDENCE OVER DRAWN SCALE. ALL LEVELS, DIMENSIONS AND EXISTING CONDITIONS TO BE ALL LEVELS, DIMENSIONS AND EXISTING CONDITIONS TO BE CHECKED BY CONTRACTOR AND VERIFIED BEFORE COMMENCEMENT OF WORKS ON SITE, ANY DISCREPANCIES TO BE REPORTED TO THE OFFICE IMMEDIATELY. WINDOW SIZES ARE NOMINAL ONLY, SIZES MAY CHANGE DUE TO AVAILABILITY.

- FLOOR PLANS ARE DIMENSIONED TO TIMBER STUD FRAME.
 ALL WORKS MUST BE EXECUTED IN A WORKMANLIKE MANOR AND
 MUST CONFORM TO THE LATEST APPLICABLE AUSTRALIAN
- STANDARDS.
 THESE DRAWINGS SHALL NOT BE ALTERED, REPRODUCED, COPIED IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION FROM ACCESS LIVING GROUP.

 ALL DIMENSION ARE NOMINAL AND MUST BE VERIFIED ON SITE.

SLAB PLAN

property developments

1/37 Ascot Dr, Huntingfield TAS 7055

P +61 3 6289 6601

HPS-ABELIA-12.5(05H.02) Client: SJM PROPERTY DEVELOPMENTS


Facade: C-BYRON 02-STONE

N Approx

DRAWING DETAILS 22/03/2024 4:35:24 pm SHEET SIZE JOB 488N

Location: 46 FRIENDSHIP DRIVE, SORELL TAS 7172 Drawing: SLAB PLAN

All dimensions to be verified

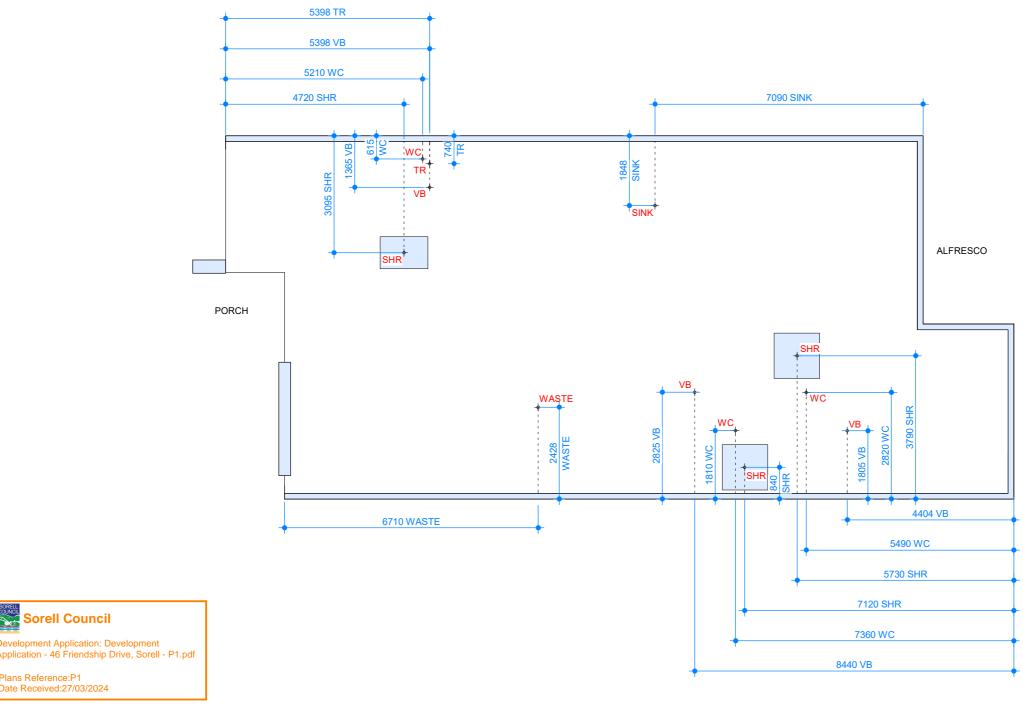

SLAB PENETRATION PLAN 1:100

IMPORTANT NOTES:

- WRITTEN DIMENSIONS TAKE PRECEDENCE OVER DRAWN SCALE. ALL LEVELS, DIMENSIONS AND EXISTING CONDITIONS TO BE ALL LEVELS, DIMENSIONS AND EXISTING CONDITIONS TO BE CHECKED BY CONTRACTOR AND VERIFIED BEFORE COMMENCEMENT OF WORKS ON SITE, ANY DISCREPANCIES TO BE REPORTED TO THE OFFICE IMMEDIATELY. WINDOW SIZES ARE NOMINAL ONLY, SIZES MAY CHANGE DUE TO AVAILABILITY.

Sorell Council

Plans Reference:P1 Date Received:27/03/2024

evelopment Application: Development

- AVAILABILITY:
 FLOOR PLANS ARE DIMENSIONED TO TIMBER STUD FRAME.
 ALL WORKS MUST BE EXECUTED IN A WORKMANLIKE MANOR AND
 MUST CONFORM TO THE LATEST APPLICABLE AUSTRALIAN
 STANDARDS.
 THESE DRAWINGS SHALL NOT BE ALTERED, REPRODUCED, COPIED
 IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION FROM
 ACCESS LIVING GROUP.
 ALL DIMENSION ARE NOMINAL AND MUST BE VERIFIED ON SITE.



1/37 Ascot Dr, Huntingfield TAS 7055

P +61 3 6289 6601


HPS-ABELIA-12.5(05H.02) Client: SJM PROPERTY DEVELOPMENTS Location: 46 FRIENDSHIP DRIVE, SORELL TAS 7172

Drawing: SLAB PENETRATION PLAN

Facade: C-BYRON 02-STONE

Approx JOB

DRAWING DETAILS 22/03/2024 4:35:24 pm 488N

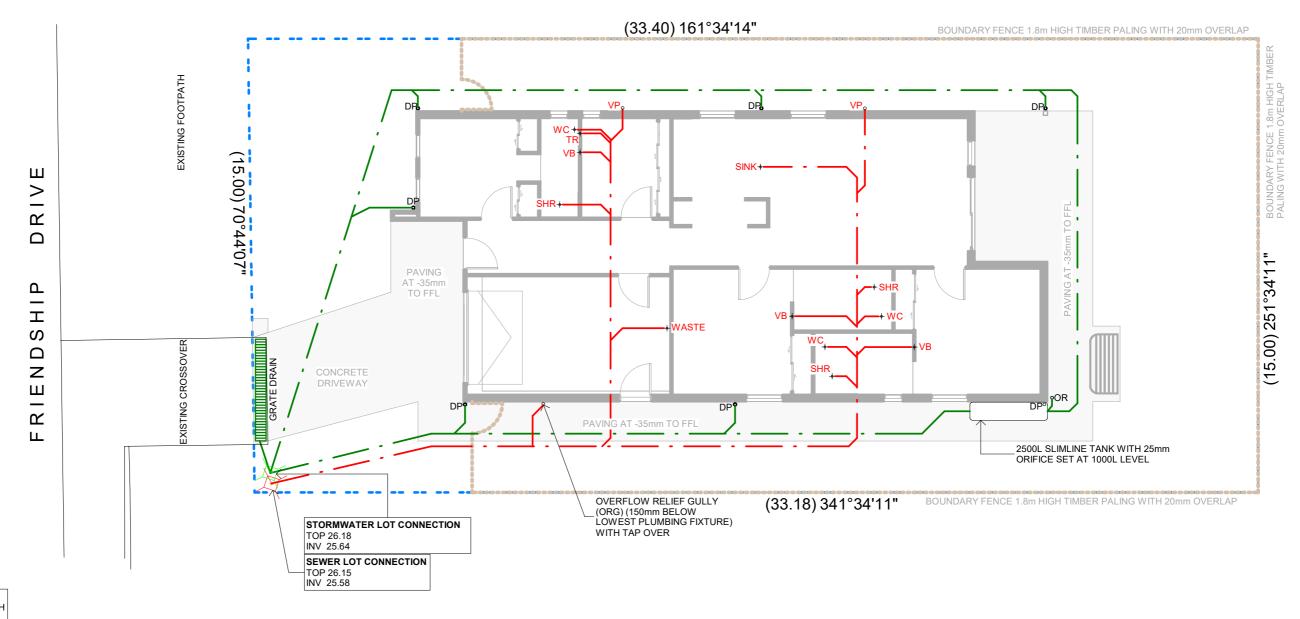

VENTING OF DRAINS TO COMPLY WITH AS/NZS 3500.2 3.9.2.1 CLAUSE.

PLUMBING LEGEND:

100Ø SEWER PIPE 100Ø STORMWATER PIPE

WC VP TR SHR SINK VB AAV DP

Ø100 WATER CLOSER Ø50 VENT PIPE Ø50 TROUGH Ø50 SHOWER Ø40 VANITY/BASIN AIR ADMITTANCE VALVE Ø90 DOWNPIPE **PLUMBING PLAN**

Sorell Council

Plans Reference:P1 ate Received:27/03/2024

plication - 46 Friendship Drive, Sorell - P1.pdf

IMPORTANT NOTES:

- WRITTEN DIMENSIONS TAKE PRECEDENCE OVER DRAWN SCALE. ALL LEVELS, DIMENSIONS AND EXISTING CONDITIONS TO BE ALL LEVELS, DIMENSIONS AND EXISTING CONDITIONS TO BE CHECKED BY CONTRACTOR AND VERIFIED BEFORE COMMENCEMENT OF WORKS ON SITE, ANY DISCREPANCIES TO BE REPORTED TO THE OFFICE IMMEDIATELY. WINDOW SIZES ARE NOMINAL ONLY, SIZES MAY CHANGE DUE TO AVAILABILITY.

- AVAILABILITY.
 FLOOR PLANS ARE DIMENSIONED TO TIMBER STUD FRAME.
 ALL WORKS MUST BE EXECUTED IN A WORKMANLIKE MANOR AND
 MUST CONFORM TO THE LATEST APPLICABLE AUSTRALIAN
 STANDARDS.
 THESE DRAWINGS SHALL NOT BE ALTERED, REPRODUCED, COPIED
- IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION FROM ACCESS LIVING GROUP.

 ALL DIMENSION ARE NOMINAL AND MUST BE VERIFIED ON SITE.



1/37 Ascot Dr, Huntingfield TAS 7055

P +61 3 6289 6601


HPS-ABELIA-12.5(05H.02) Client: SJM PROPERTY DEVELOPMENTS Location: 46 FRIENDSHIP DRIVE, SORELL TAS 7172 Facade: C-BYRON 02-STONE

N Approx

DRAWING DETAILS 22/03/2024 4:35:25 pm SHEET SIZE JOB 488N


A02


Drawing: PLUMBING PLAN

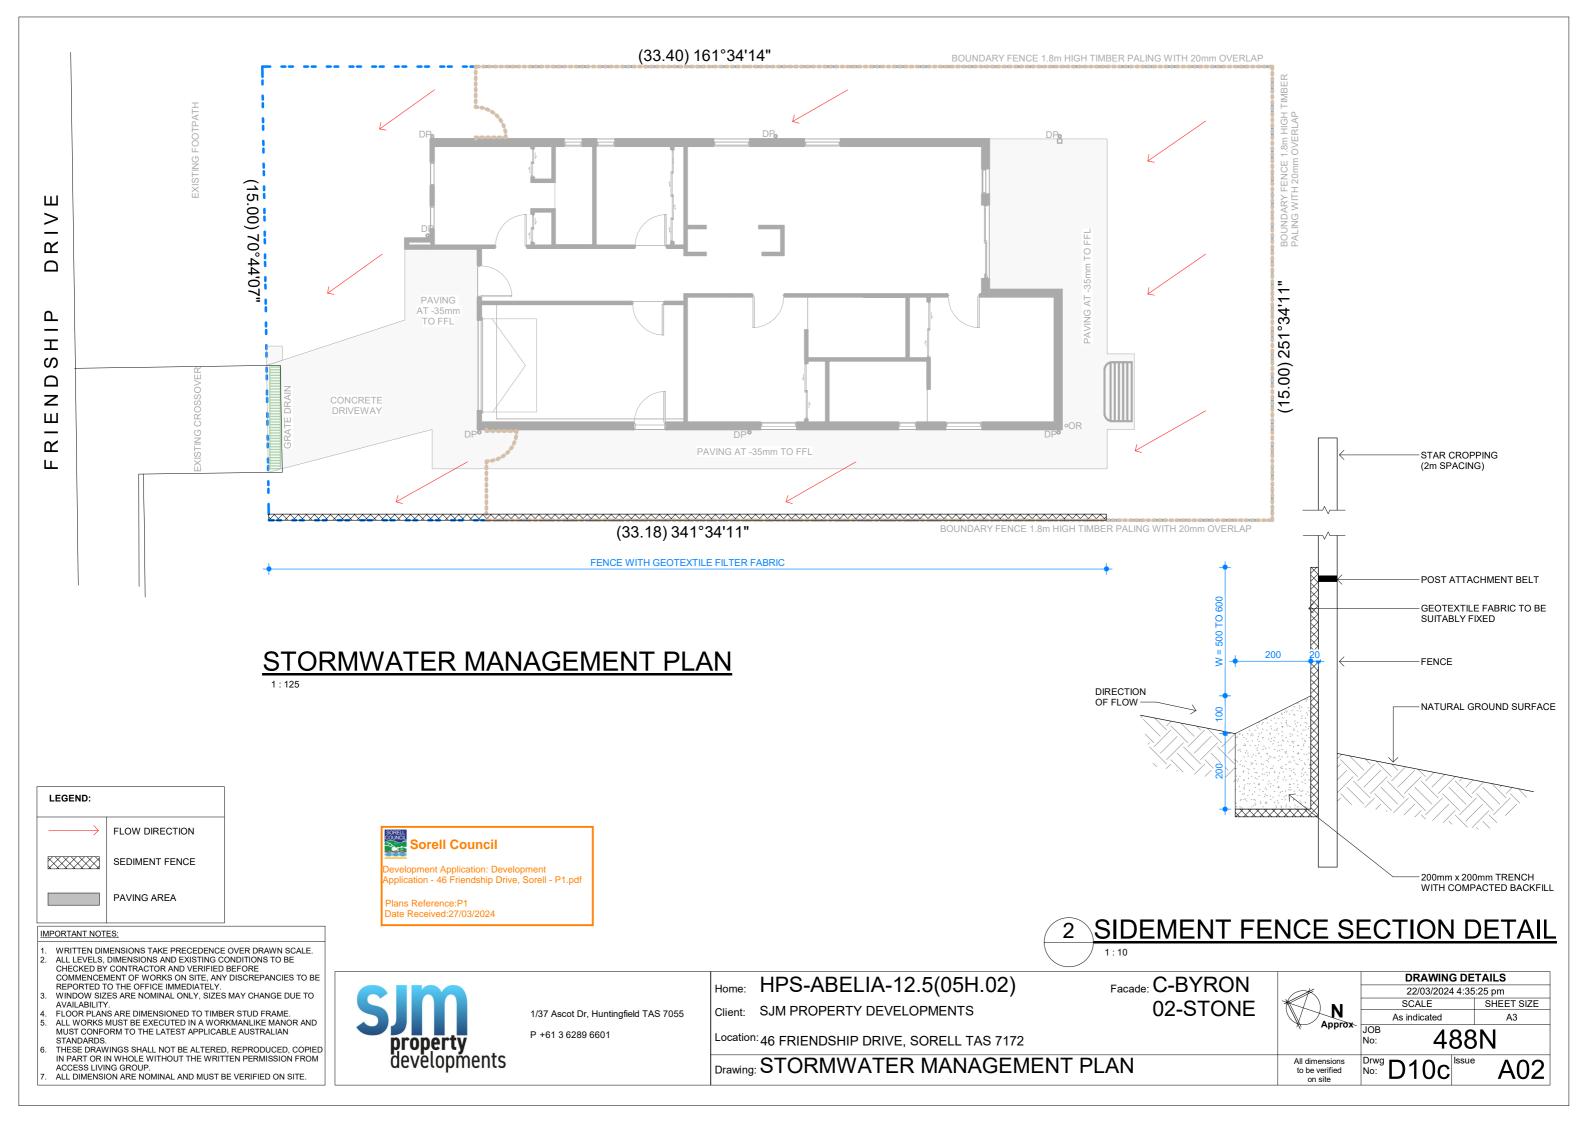

ALL FLOOR COVERINGS TO BE FIRM AND EVEN AND FEATURE A TRANSITION BETWEEN ABUTTING SURFACES (A MAXIMUM VERTICAL TOLERANCÈ OF 3mm OR 5mm BETWEEN SURFACES IS ALLOWABLE PROVIDED THE LIP IS ROUNDED OR BEVELED.)

ALL INTERNAL FLOOR FINISHES SHALL HAVE A MINIMUM SLIP RESISTANCE OF P3 OR R10.



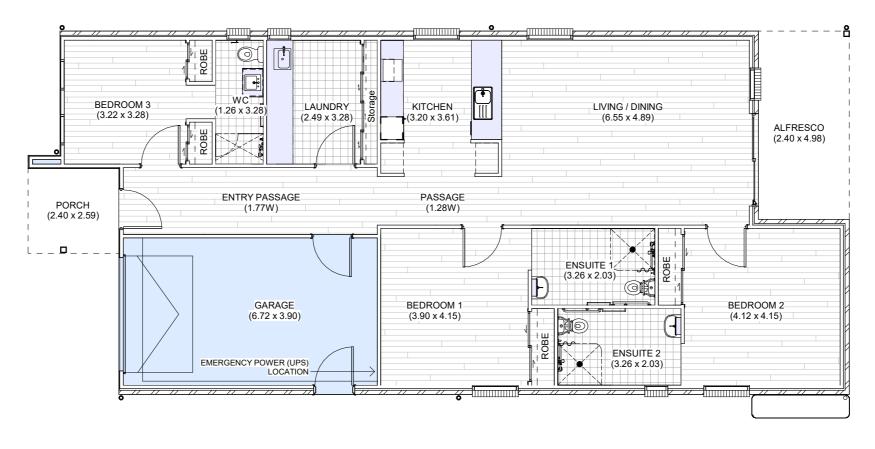

FLOOR FINISHES PLAN



IMPORTANT NOTES:

- WRITTEN DIMENSIONS TAKE PRECEDENCE OVER DRAWN SCALE. ALL LEVELS, DIMENSIONS AND EXISTING CONDITIONS TO BE CHECKED BY CONTRACTOR AND VERIFIED BEFORE COMMENCEMENT OF WORKS ON SITE, ANY DISCREPANCIES TO BE REPORTED TO THE OFFICE IMMEDIATELY.
- WINDOW SIZES ARE NOMINAL ONLY, SIZES MAY CHANGE DUE TO AVAILABILITY.
- AVAILABILITY.
 FLOOR PLANS ARE DIMENSIONED TO TIMBER STUD FRAME.
 ALL WORKS MUST BE EXECUTED IN A WORKMANLIKE MANOR AND
 MUST CONFORM TO THE LATEST APPLICABLE AUSTRALIAN
 STANDARDS.
 THESE DRAWINGS SHALL NOT BE ALTERED, REPRODUCED, COPIED
- IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION FROM ACCESS LIVING GROUP.
- ALL DIMENSION ARE NOMINAL AND MUST BE VERIFIED ON SITE.



1/37 Ascot Dr, Huntingfield TAS 7055 P +61 3 6289 6601

HPS-ABELIA-12.5(05H.02) Client: SJM PROPERTY DEVELOPMENTS Location: 46 FRIENDSHIP DRIVE, SORELL TAS 7172 Facade: C-BYRON 02-STONE

N Approx JOB

DRAWING DETAILS 22/03/2024 4:35:26 pm SHEET SIZE 488N

A02

Drawing: FLOOR FINISHES PLAN

All dimensions to be verified

ELECTRICAL LEGEND:

- Ceiling Mounted LED 10W SEALED IC-F RATED
- Pendant Light as Selected LED 10W
- **External Wall Mounted Light** @ 1800 above adjoining floor level unless otherwise indicated by height shown in brackets
- Light Switch Single @ 1000 above adjoining floor level unless otherwise indicated by height shown in brackets
- XD Light Switch Dimmer @ 1000 above adjoining floor level unless otherwise indicated by height shown in brackets
- X2 Light Switch Two Way @ 1000 above adjoining floor level unless otherwise indicated by height shown in brackets
- Isolator Switch 6mm 32 AMP @300mm of bench top edge
- Rangehood Switch @300mm of bench top edge
- GPO Single @ 700 above adjoining floor level unless otherwise indicated by height shown in brackets
- **GPO Double** @ 700 above adjoining floor level unless otherwise indicated by height shown in brackets
- GPO Double (External) @ 1200 above adjoining floor level unless otherwise indicated by height
- GPO Single (Capped) At window head height
- GPO Double (Capped) At window head height
- GPO 3 Phase for Car Charge
- **INSTALLATION ONLY** @ 1100 above adjoining floor level unless otherwise indicated by height shown in brackets
- Conduit for 3 Phase Car Charge **INSTALLATION ONLY**
- TV Socket
 - @ 300 above adjoining floor level unless otherwise indicated by height shown in brackets
- @ 300 above adjoining floor level unless otherwise indicated by height shown in brackets
- Ceiling Mounter Exhaust Fan
- Ceiling Fan with Light
- Ceiling Fan
- Motion Sensor
- (tO)) Smoke Alarm
- Smoke Alarm with Emergency Light
- **Reverse Cycle Air Conditioning** (I)
- Man Hole МН

IMPORTANT NOTES

- 600x600 (Approx. Position)
- I Intercom (1000mm above FFL)

ELECTRICAL NOTES:

- · LIGHT AND GPO SWITCHES SHALL BE ROCKER ACTION, TOGGLE OR PUSH PAD IN DESIGN WITH A MINIMUM WIDTH OF 35mm
- DIMMABLE LIGHTING SWITCHES SHALL BE PROVIDED IN LIVING
- PROVIDE POWER AND CONTROL CABLING TO HEAD OF ENTRY DOORS OF BEDROOMS, ONE EXTERNAL ENTRY DOORWAY AND ONE EXTERNAL DOORWAY TO LIVING
- POWER POINT IN CEILING SPACE FOR DUCTED HEATING & COOLING
- PROVIDE POWER AND CONTROL CABLING TO WINDOWS OF BEDROOMS, AND LIVING AREAS FOR FUTURE WINDOW BLIND AUTOMATION. PROVIDE A CAPPED GPO AT WINDOW HEAD WHERE

- · GPO'S IN BEDROOMS TO BE MINIMUM 600mm HIGH FROM FFL
- GPO'S ABOVE BENCHES AND DESKS TO BE A MINIMUM 300mm FROM EDGE OF BENCH/DESK.
- PROVIDE MINIMUM 300LUX LIGHTING LEVELS AT MAXIMUM INTERVALS OF 1500mm MEASURED DIRECTLY OVER BENCHTOPS.
- ALL LIGHT SWITCHES SHALL BE POSITIONED IN A CONSISTENT LOCATION:
- 1000mm ABOVE FINISHED FLOOR LEVEL
- HORIZONTALLY ALIGNED WITH THE DOOR HANDLE AT THE ENTRANCE
- A MINIMUM OF 500mm FROM AN INTERNAL CORNER TO C/L OF THE LIGHT SWITCH

- STANDARD VIDEO INTERCOM TO BEDROOMS & KITCHEN/LIVING.
- BEDROOMS SHALL HAVE A PROVISION FOR POWER AND INBUILT STRUCTURE, CAPABLE OF INSTALLATION OF A CONSTANT CHARGE
- EMERGENCY POWER SOLUTIONS SHALL BE PROVIDED TO CATER FOR A MINIMUM 2-HOUR OUTAGE IN NO LESS THAN 2 DOUBLE GPOS IN PARTICIPANT BEDROOMS AND ANY PROVIDED AUTOMATED DOORS THAT ARE USED FOR ENTRY OR EGRESS
- · BACKUP FOR LIFE SUPPORT SYSTEMS IF NEEDED BY PARTICIPANTS.

LEGEND - SERVICES				
HWS	HOT WATER SERVICE			

METER BOX


GAS METER


OR OVERFLOW RISER

ILLUMINATION POWER DENSITY			
LIVING AREA:	151.00m²		
TOTAL MAXIMUM ALLOWABLE FOR LIVING AREA AT 5WATTS/m²	755.00 WATTS		
ACTUAL USAGE = 10WATTS x	21 DOWNLIGHTS	210.00 WATTS	
TOTAL WATTS USAGE =	1.39 WATTS/m ²		

GARAGE AREA:	28.30m²	
TOTAL MAXIMUM ALLOWABLE FOR GARAGE AREA AT 3WATTS/M ²	84.90 WATTS	
ACTUAL USAGE = 10WATTS x	2 DOWNLIGHTS	20.00 WATTS
TOTAL WATTS USAGE =	0.71 WATTS/m ²	

PORCH / ALFRESCO AREA:	17.70m²	
TOTAL MAXIMUM ALLOWABLE FOR PORCH / ALFRESCO AREA AT 4WATTS/M ²	70.8 WATTS	
ACTUAL USAGE = 8WATTS x	2 DOWNLIGHTS	16.00 WATTS
TOTAL WATTS USAGE =	0.90 WATTS/m ²	

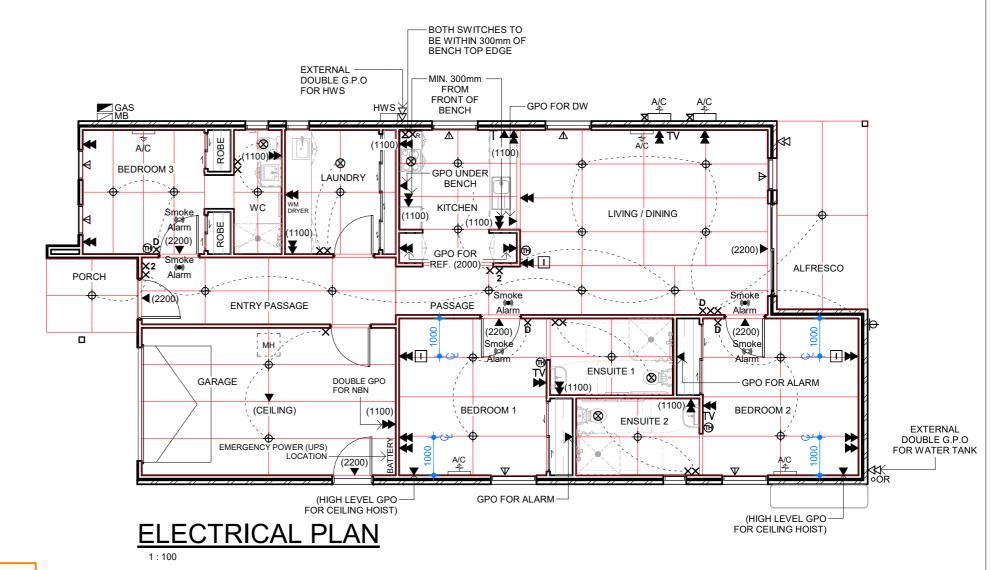





olication - 46 Friendship Drive, Sorell - P1.pdf

te Received:27/03/2024

ALL LEVELS. DIMENSIONS AND EXISTING CONDITIONS TO BE CHECKED BY CONTRACTOR AND VERIFIED BEFORE COMMENCEMENT OF WORKS ON SITE, ANY DISCREPANCIES TO BE REPORTED TO THE OFFICE IMMEDIATELY WINDOW SIZES ARE NOMINAL ONLY, SIZES MAY CHANGE DUE TO AVAILABILITY. AVAILABILITY.
FLOOR PLANS ARE DIMENSIONED TO TIMBER STUD FRAME.
ALL WORKS MUST BE EXECUTED IN A WORKMANLIKE MANOR AND MUST CONFORM TO THE LATEST APPLICABLE AUSTRALIAN

THESE DRAWINGS SHALL NOT BE ALTERED, REPRODUCED, COPIED IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION FROM ACCESS LIVING GROUP.

ALL DIMENSION ARE NOMINAL AND MUST BE VERIFIED ON SITE

WRITTEN DIMENSIONS TAKE PRECEDENCE OVER DRAWN SCALE.

property developments

1/37 Ascot Dr, Huntingfield TAS 7055

P +61 3 6289 6601

HPS-ABELIA-12.5(05H.02) Client: SJM PROPERTY DEVELOPMENTS

Location: 46 FRIENDSHIP DRIVE, SORELL TAS 7172

Drawing: ELECTRICAL & LIGHTING PLANS

N Approx

DRAWING DETAILS 22/03/2024 4:35:27 pm SHEET SIZE 1:100 JOB 488N

All dimensions

Facade: C-BYRON

02-STONE

FIRE SPRINKLER SYSTEM NOTES:

THIS PLAN IS FOR SPRINKLER SYSTEMS TO BE CONNECTED TO THE TOWNS MAIN VIA THE DRINKING WATER METER. THIS PLAN IS NOT TO BE USED FOR TANK & PUMP WATER SUPPLIES.

INSTALLATION REQUIREMENTS

- 1. ALL PIPE, FITTING AND SUPPORTS SHALL BE IN ACCORDANCE WITH AS3500.1.
- 2. FOR SPRINKLER SYSTEMS SUPPLIED BY TOWNS MAIN WATER SUPPLIES, ALL PIPE, FITTINGS AND SPRINKLERS SHALL WATERMARK APPROVED.
- 3. SPRINKLER HEADS SHALL BE IN ACCORDANCE WITH THE SPRINKLER HEAD DATA REQUIREMENTS TABLE ON THIS DRAWING.
- 4. PLASTIC PIPE SUPPLYING SPRINKLERS SHALL BE CONCEALED AND NOT EXPOSED TO LIGHT OR WEATHER
- 5. FOR TOWNS' MAIN WATER SUPPLIES, ALL COLD-WATER DRINKING FIXTURES SHALL BE SUPPLIED BY THE SPRINKLER LOOP WITH THE ONLY PERMITTED EXCEPTION BEING THOSE THAT ARE REQUIRED TO BE SUPPLIED BY NON-POTABLE WATER SUPPLY, BY JURISDICTIONAL REQUIREMENTS.

HYDRAULIC REQUIREMENTS

- ALL PIPE, FITTINGS AND VALVES FEEDING THE LOOP FROM TOWNS' MAIN WATER METER, SHALL BE NOT LESS THAN DN 32.
- ALL SPRINKLERS IN THE SYSTEM SHALL BE INSTALLED ON THE ONE COMMON PIPE LOOP ONLY.
- 8. NO BRANCHES SUPPLYING INDIVIDUAL SPRINKLERS ARE PERMITTED.
- 9. BRIDGING OF THE LOOP IS NOT PERMITTED.
- NO ELBOWS ARE PERMITTED IN THE PIPE LOOP. LOOP MUST BE CONTINUOUSLY FLOWTHROUGH ONLY.
- 11. SPRINKLERS SHALL BE SUPPLIED THROUGH NOT LESS THAN DN25MM TEES IN THE PIPE LOOP
- 12. DN 15 M&F EXTENSION DROPPERS PERMITTED TO BE USED AT TEE BRANCH, FOR SPRINKLER HEIGHT ADJUSTMENT ONLY AND SHALL BE NOT LONGER THAN 100MM.
- 13. SYSTEM SHALL BE DESIGNED AND INSTALLED SUCH THAT THE PRESSURE AND FLOW REQUIREMENTS ON THIS DRAWING CAN BE SATISFIED.
- 14. FIXTURES OR IRRIGATION SYSTEMS THAT MAY DRAW GREATER THAN 25L/MIN SHALL NOT BE INSTALLED.

SPACING AND LOCATION OF SPRINKLERS

- 15. SPRINKLERS SHALL BE LOCATED NOT MORE THAT 2.5M FROM A WALL, MEASURED PERPENDICULAR TO THE WALL ONLY.
- SPRINKLER LOCATION MAY BE MOVED NOT MORE THAN 300MM FROM THE POSITION DIMENSIONED ON THIS DRAWING.
- 17. SOURCES OF HEAT THAT MAY OPERATE SPRINKLERS SUCH AND FIRE PLACES, HEATERS, HEAT LAMPS ETC., SHALL NOT BE LOCATED IN CLOSE PROXIMITY TO SPRINKLERS.
- 18. LIGHT FIXTURES SHALL NOT BE INSTALLED CLOSER THAN 300MM FROM SPRINKLERS.
- 19. SPRINKLERS IN THE GARAGE SHALL BE POSITIONED SUCH THAT THE GARAGE DOOR DOES NOT INTERFERE WITH THE SPRAY PATTERN OF SPRINKLERS WHEN THE DOOR IS UP.

COMMISSIONING REQUIREMENTS

- 20. WIDE ANGLE PHOTOGRAPHS OF EACH SPRINKLER PROTECTED ROOM SHALL BE TAKEN BEFORE CEILING IS INSTALLED WITH GOOD VISIBILITY OF SPRINKLER(S). THESE SHALL BE PROVIDED AS EVIDENCE OF COMPLIANT INSTALLATION FOR CERTIFICATION PURPOSE.
- 21. THE COMBINED SPRINKLER AND DRINKING SYSTEM SHALL BE FLUSHED, THEN PRESSURIZED AND HYDROSTATICALLY TESTED IN ACCORDANCE WITH THE SYSTEM COMMISSIONING PROVISIONS OF AS3500.1.
- 22. A PRESSURE AND FLOW TEST SHALL BE CONDUCTED AFTER SUCCESSFUL COMPLETION OF THE HYDROSTATIC TEST DESCRIBED ABOVE. THE PRESSURE AND FLOW TEST SHALL VALIDATE THAT THE PRESSURE AND FLOW PERFORMANCE REQUIREMENTS ARE MET.
- 23. THE ABOVE COMMISSIONING TEST MUST BE COMPLETED BEFORE CERTIFICATION CAN BE GRANTED.

SPRINKLER HEAD DATA		
SPRINKLER OCCUPANCY TYPE	RESIDENTIAL	
SPRINKLER ORIENTATION	CONCEALED OR PENDANT	
SPRINKLER OPERATION TEMPERATURE	57 - 74 DEGREES C	
K FACTOR (METRIC)	68 TO 72	
THREAD SIZE	15mm BSPT	
WATERMARK APPROVAL	REQUIRED	


NOTE:

FIRE SPRINKLER SYSTEM TO BE IN INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF AS 2118.5-2008 AUTOMATIC FIRE SPRINKLER SYSTEMS (RECONFIRMED 2020)

PRESSURE AND FLOW PERFORMANCE REQUIREMENTS

50 L/Min @ 150 kPa

PRESSURE MEASURED IMMEDIATELY DOWNSTREAM OF THE WATER METER

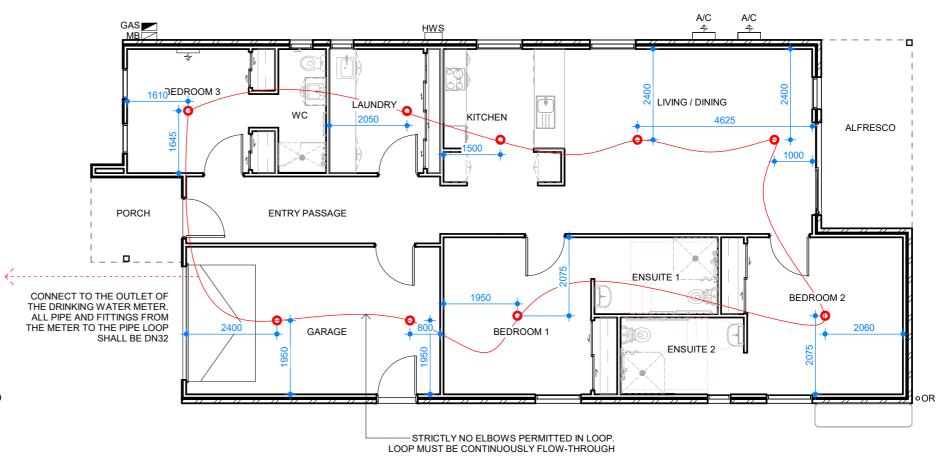

FIRE SPRINKLER PLAN FOR TOWNS MAIN CONNECTION

1:100

O FIRE SPRINKLER

○OR OVERFLOW RISER

IMPORTANT NOTES:


- WRITTEN DIMENSIONS TAKE PRECEDENCE OVER DRAWN SCALE.
 ALL LEVELS, DIMENSIONS AND EXISTING CONDITIONS TO BE CHECKED BY CONTRACTOR AND VERIFIED BEFORE COMMENCEMENT OF WORKS ON SITE, ANY DISCREPANCIES TO BE REPORTED TO THE OFFICE IMMEDIATELY.
- . WINDOW SIZES ARE NOMINAL ONLY, SIZES MAY CHANGE DUE TO AVAILABILITY.
- FLOOR PLANS ARE DIMENSIONED TO TIMBER STUD FRAME.

 ALL WORKS MUST BE EXECUTED IN A WORKMANLIKE MANOR AND
- ALL WORKS MUST BE EXECUTED IN A WORKMANLIKE MANOR AND MUST CONFORM TO THE LATEST APPLICABLE AUSTRALIAN STANDARDS.
- THESE DRAWINGS SHALL NOT BE ALTERED, REPRODUCED, COPIED IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION FROM ACCESS LIVING GROUP.
- 7. ALL DIMENSION ARE NOMINAL AND MUST BE VERIFIED ON SITE.



1/37 Ascot Dr, Huntingfield TAS 7055 P +61 3 6289 6601

Home: HPS-ABELIA-12.5(05H.02)	Facade: C-BYRON			DRAWING	
Holle. TH C / (DEEL) (12.0(0011.02)				22/03/2024 4 SCALE	4:35:28 pm SHEET SIZE
Client: SJM PROPERTY DEVELOPMENTS	02-STONE	N		1:100	A3
		Approx			
Location: 46 FRIENDSHIP DRIVE, SORELL TAS 7172		Д Арргох	JOB No:	48	88N

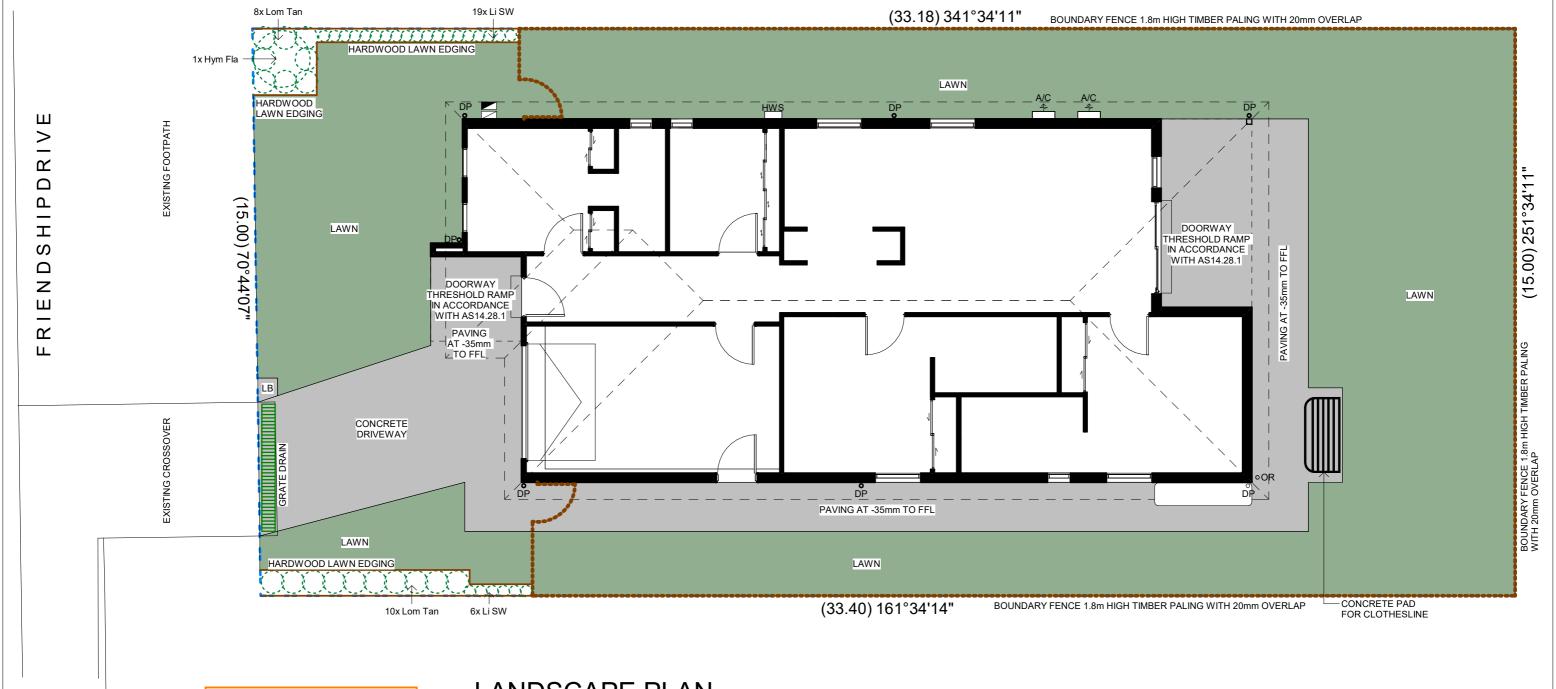

Sorell Council

evelopment Application: Development oplication - 46 Friendship Drive, Sorell - P1.pdf

Plans Reference:P1 Date Received:27/03/2024

LANDSCAPE PLAN

SELEC	TED PLAN	IT LIST				
NO	CODE	POT	BOTANICAL NAME	COMMON NAME	HEIGHT	WIDTH
TREES	.		_			
1	_Hym_fla	400	Hymenosporum flavum	NATIVE FRANGIPANI	8.0	4.0
SHRUE	36					
		140	- Lomandra longifolia "Tanika"	MAT RUSH	0.4	0.6
'0	_ Eoin Tan	10-	Londing on Tanka			
GROU	ND COVER	RS				
25	LiSW	140	Liriope muscari 'Stripy White'	STRIPEY WHITE	0.3	0.4

IMPORTANT NOTES:

- WRITTEN DIMENSIONS TAKE PRECEDENCE OVER DRAWN SCALE. ALL LEVELS, DIMENSIONS AND EXISTING CONDITIONS TO BE ALL LEVELS, DIMENSIONS AND EXISTING CONDITIONS TO BE CHECKED BY CONTRACTOR AND VERIFIED BEFORE COMMENCEMENT OF WORKS ON SITE, ANY DISCREPANCIES TO BE REPORTED TO THE OFFICE IMMEDIATELY. WINDOW SIZES ARE NOMINAL ONLY, SIZES MAY CHANGE DUE TO AVAILABILITY.

- AVAILABILITY.
 FLOOR PLANS ARE DIMENSIONED TO TIMBER STUD FRAME.
 ALL WORKS MUST BE EXECUTED IN A WORKMANLIKE MANOR AND
 MUST CONFORM TO THE LATEST APPLICABLE AUSTRALIAN
- STANDARDS.
 THESE DRAWINGS SHALL NOT BE ALTERED, REPRODUCED, COPIED IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION FROM ACCESS LIVING GROUP.
- ALL DIMENSION ARE NOMINAL AND MUST BE VERIFIED ON SITE.



1/37 Ascot Dr, Huntingfield TAS 7055 P +61 3 6289 6601

HPS-ABELIA-12.5(05H.02) Client: SJM PROPERTY DEVELOPMENTS Location: 46 FRIENDSHIP DRIVE, SORELL TAS 7172 Facade: C-BYRON 02-STONE

Approx

DRAWING DETAILS 22/03/2024 4:35:29 pm SHEET SIZE 488N

Drawing: LANDSCAPE PLAN

All dimensions to be verified